


REV.	DATE	DESCRIPTION
NC	10/03/01	INITIAL RELEASE
A	01/05/06	UPDATE DRAWING FORMAT


3.50 [.138] ————— 14.00 [552] —————

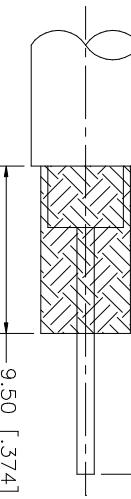

RECOMMENDED CABLE
STRIPPING DIM'S

5/8-24UNEF-2B

18.20 [.717]

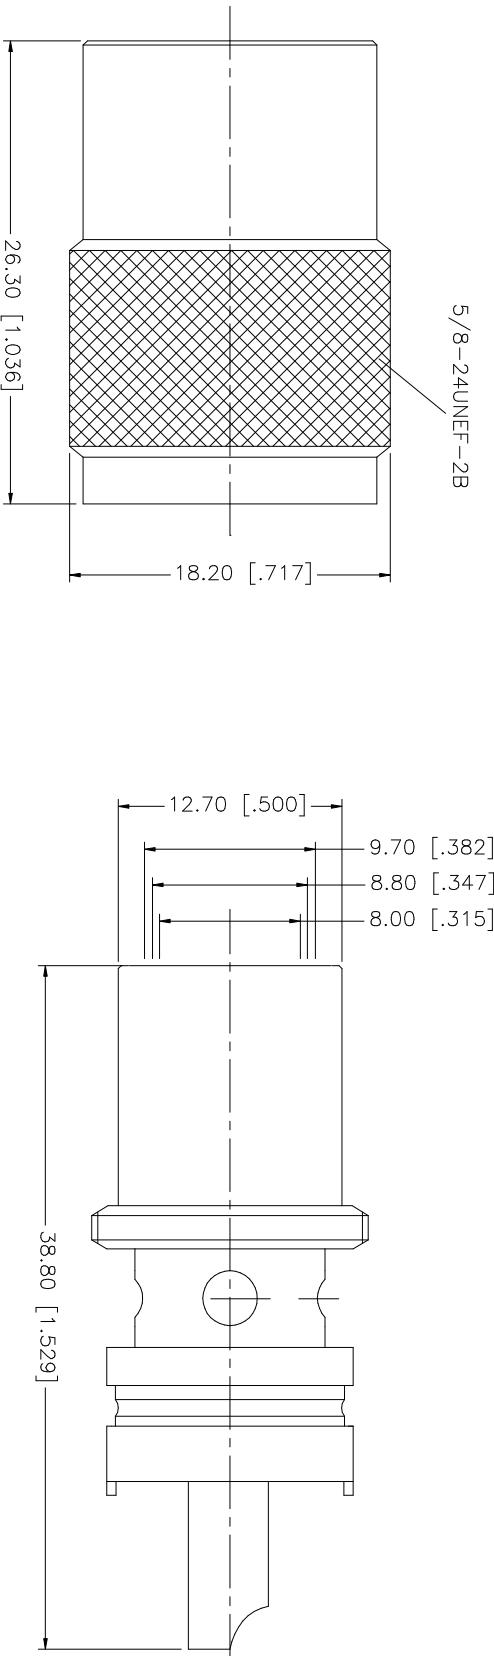

26.30 [1.036]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED,
TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm

8 – 30mm ± 0.40mm

30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED,
TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"

.315 – 1.180 = ± 0.015"

1.180 – 4.724 = ± 0.020"

Amphenol Connex

DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE
				DO NOT SCALE DRAWING
				C:/182/182120-10.DWG
				DWG. NO. 182120-10.DWG
DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE
1 BODY	BRASS	SILVER	1	C:/182/182120-10.DWG
2 INSULATOR	TEFLON	NATURAL	1	
3 CONTACT PIN	BRASS	GOLD	1	
4 COUPLING NUT	BRASS	NICKEL	1	
8				
7				
6				
5				
4				
3				
2				
1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[182120-10](#)