

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

(C) COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

DESCRIPTION

DATE

DWN

APVD

P

LTR


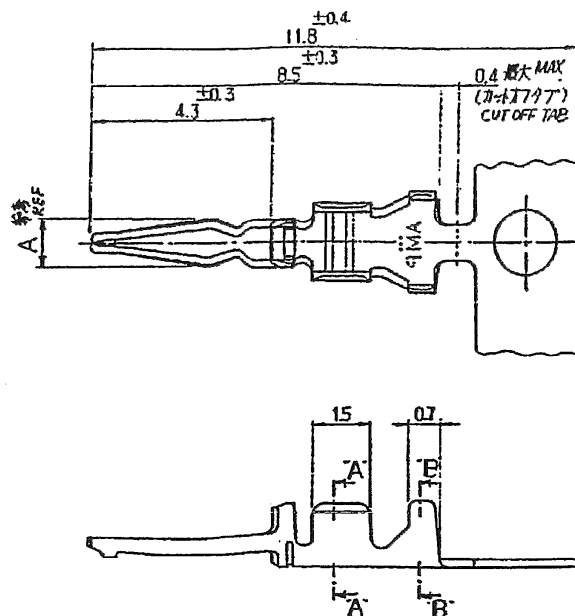

C2

REVISED PER ECR-14-013099

09DEC2014

NK

GJ

断面 A-A  
SECT断面 B-B  
SECT

## NOTES:

1. APPLICABLE HDR HSG :172520(2.5PITCH)  
:172890(2.0PITCH)
2. PRODUCT SPEC:108-5163
3. CRIMPING SPEC:114-5062  
COMMON APPLICATOR FOR 2/2.5MM PITCH  
HDR HSG:P/N 755764-X  
EXCLUSIVE APPLICATOR FOR 2.5MM PITCH  
HDR HSG:P/N 752829-X
4. INSTRUCTION SHEET:IS-206J,207J,208J


## 注記

1. 適用ハウジング型番:172520(2.5MMピッチ用)  
:172890(2.0MMピッチ用)
2. 製品規格: 108-5163  
2/2.5MMピッチ・ヘッダーハウジング  
専用アプリケーション型番: 755764-X  
2.5MMピッチ・ヘッダーハウジング  
専用アプリケーション型番: 752829-X
4. 取扱説明書: IS-206J,207J,208J

5. LOOSE PIECE 172797-X SUPERSEDED  
BY CONTINUOUS 172781-X.

1.2	1-0.05 DIA	1.2-1.6	5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-4
0.95	0.8±0.1 DIA	1.2-1.6	5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-3
1.2	1-0.05 DIA	1.2-1.6	5	PRE-TINNED BRASS 0.2t	172781-2
0.95	0.8±0.1 DIA	1.2-1.6	5	錫めっき済黄銅0.2t	172781-1
A REF	APPLICABLE PCB HOLE AND THK	LOOSE PIECE CONTACT P/N	MATERIAL	PART NO.	
参考 A寸法	適用基板穴径と板厚	バラ状端子型番	材料	型番	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
単位: 純  
mmMATERIAL  
材料  
SEE TABLETOLERANCES UNLESS  
OTHERWISE SPECIFIED:  
一般公差10 ≤ ± 0.2  
10 < ≤ 30 ± 0.25  
30 < ≤ 100 ± 0.3  
ANGLES ± 5°FINISH  
仕上

DWN J.SATO 120CT05

CHK N.YAMASAKI 120CT05

APVD N.YAMASAKI 120CT05

PRODUCT SPEC  
製品規格APPLICATION SPEC  
取付適用規格

WEIGHT

CUSTOMER DRAWING

NAME

名称

SIZE

CAGE CODE

DRAWING NO

番号

RESTRICTED TO

SCALE

尺度

SHEET

OF

1

REV

C2

TE

TE Connectivity

LOW PROFILE MINI AMP-IN CONTACT

A3 00779

C-172781

1

OF

1

REV

C2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[172781-1](#) [172781-1 \(Mouser Reel\)](#)