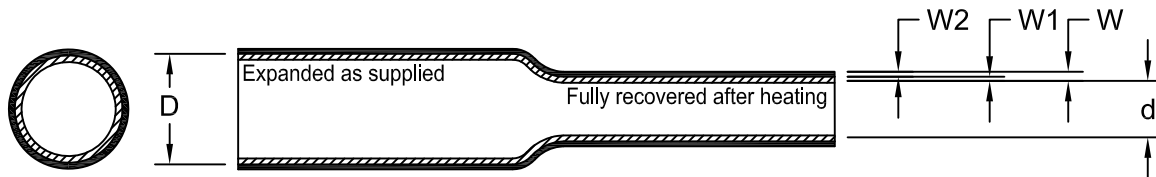


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	Released per ECO-17-014146	9/26/17	L.B	T.L

QS1500
Polyolefin, Flexible,
Adhesive Lined,
Heat - Shrinkable Tubing

**Table 1: Dimensions** mm (*inches*)

Size	As Supplied		As Recovered							
	Minimum Expanded I.D. Including Core (D)		Maximum Recovered I.D. Including Core (d)		Minimum Recovered Jacket Wall (W2)		Minimum Recovered Adhesive Wall (W1)		Minimum Recovered Total Wall (W)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
No. 1	5.72	0.225	1.27	0.050	0.64	0.025	0.56	0.022	1.20	0.047
No. 2	7.62	0.300	1.65	0.065	0.76	0.030	0.76	0.030	1.52	0.060
No. 3	11.55	0.455	2.41	0.095	0.89	0.035	1.02	0.040	1.91	0.075
No. 4	17.78	0.700	4.45	0.175	1.04	0.041	1.37	0.054	2.41	0.095
No. 5	27.94	1.100	7.62	0.300	1.93	0.076	1.57	0.062	3.51	0.138

Material: Fabricated from flame-retarded crosslinked modified flexible polyolefin, with a thermoplastic adhesive liner.

Color: Jacket color is black or red. Adhesive liner shall be amber.

Reference Specification TEC-108-120016

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2017 TE Connectivity

DIMENSIONS: INCHES		DWN J. Bitter	8AUG2017	MATERIAL -		FINISH -		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		CHK Tim Licko	-					
		APVD Tim Licko	-					
		PRODUCT SPEC		-	NAME QS1500 Polyolefin, flexible, Adhesive Lined, Heat - shrinkable Tubing			
		APPLICATION SPEC		-				
		WEIGHT -		SIZE A4	CAGE CODE 00779	DRAWING NO C- -	RESTRICTED TO -	
		CUSTOMER DRAWING				SCALE None	SHEET 1 OF 1	REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QS1500-NO.3-F7-0-STK](#)