





4

3

2


1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	FI	REV.BY ECO 16-003733	11MAR2016	HC	WLS

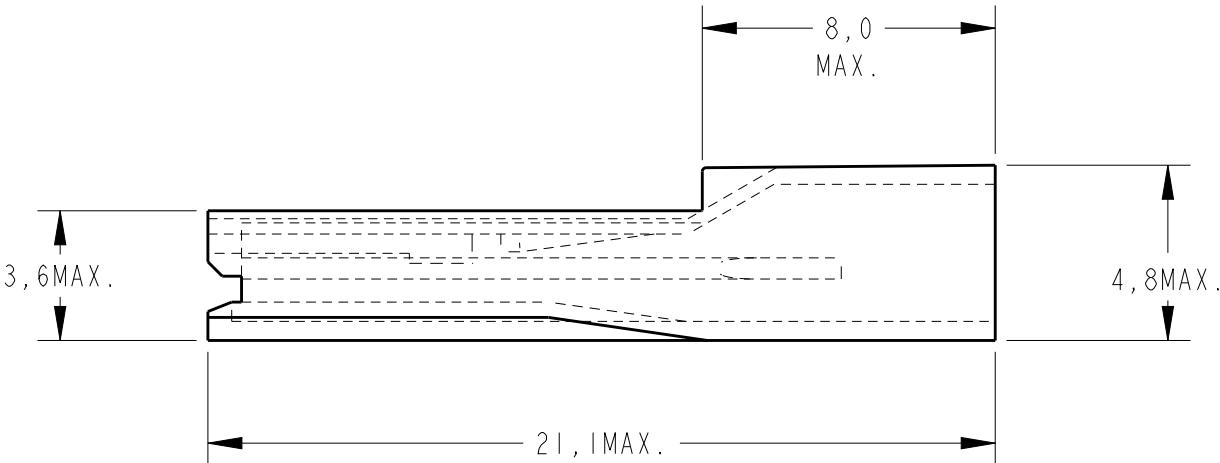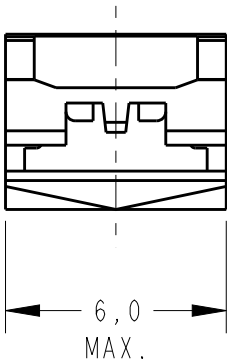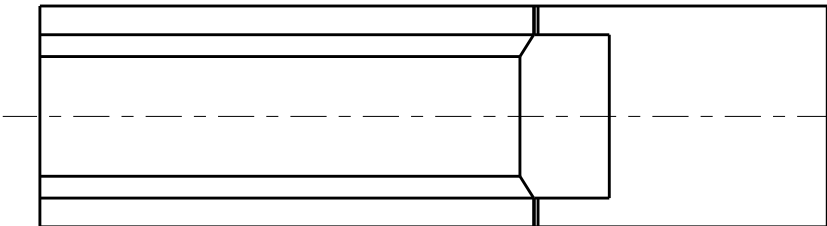

 -MATÉRIA PRIMA CONFORME ESPECIFICAÇÃO IEC 60335-1, GWT 750°, SEM CHAMA.
RAW MATERIAL ACC. TO SPEC IEC 60335-1, GWT 750°C, WITHOUT FLAME.

	NATURAL	 - PA 6.6 V-0	141628-5
	PRETO / BLACK	PA 6.6 V2 ESTABILIZADO AO CALOR	141628-4
OBSOLETE	AMARELO / YELLOW	PA 6.6 94 V2	141628-3
	NATURAL	PA 6.6 94 V2	141628-2
OBSOLETE	NATURAL	PA 6.6 94 V1	141628-1
	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.C.CANTER1 29JAN2016	 TE Connectivity		
		CHK W.L.STEFANI 29JAN2016			
		APVD - 29JAN2016			
		PRODUCT SPEC 108-37094			
DIMENSIONS: mm		APPLICATION SPEC -	NAME FASTON REC. HSG. .110 SERIES		
		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-141628
MATERIAL -		FINISH -	RESTRICTED TO -		
		CUSTOMER DRAWING	SCALE 5:1	SHEET 1	OF 1
				REV FI	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[141628-5](#)