
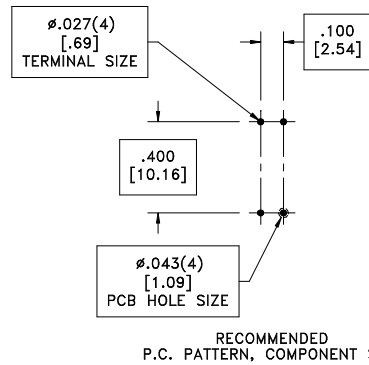



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

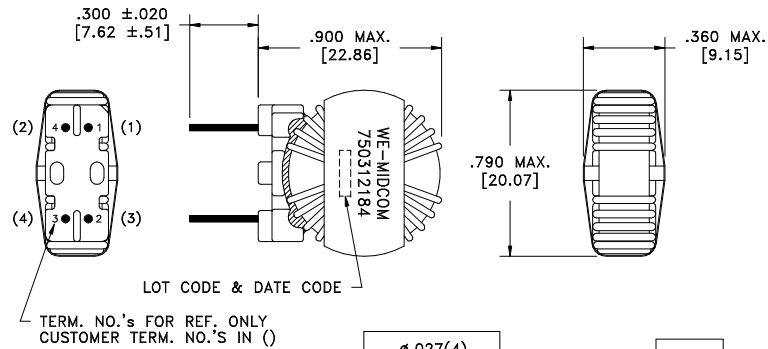

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	34 mOhms max.
D.C. RESISTANCE	2-3 @20°C	34 mOhms max.
INDUCTANCE	1-4 1kHz, 100mVAC, Ls	4.00mH ±32%
INDUCTANCE	2-3 1kHz, 100mVAC, Ls	4.00mH ±32%
LEAKAGE INDUCTANCE	1-4 tie(2+3), 10kHz, 100mVAC, Ls	21.85uH max.
DIELECTRIC	1-2 1600VAC, 1 second	-
TURNS RATIO	(1-4):(2-3)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

CURRENT RATING: 2A

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE	PART NO.
		Method: Tray PKG-0058 www.we-online.com/midcom			INDUCTOR COMMON MODE CHOKE	750312184
6A	5/11	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750312184	SPECIFICATION SHEET 1 OF 1



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[750312184](#)