


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	1/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-9/16 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	PINK
Panduit Die Index No. on Barrel	P42
Alternate Industry Die Index No. () on Barrel	(12)



Technical drawing of a Panduit wire inspection window. The drawing shows a rectangular component with a circular feature. Dimensions are provided: a vertical dimension of $.85 \pm .04$ for the total height, a horizontal dimension of $.37 \pm .04$ for the distance from the left edge to the center of the circular feature, and a circular feature diameter of $.27 \pm .02$ DIA. The circular feature is labeled "PANDUIT" and "1/0 STR/FLEX LCBX1/0-14F". A "Wire inspection window" is indicated on the right side of the component.

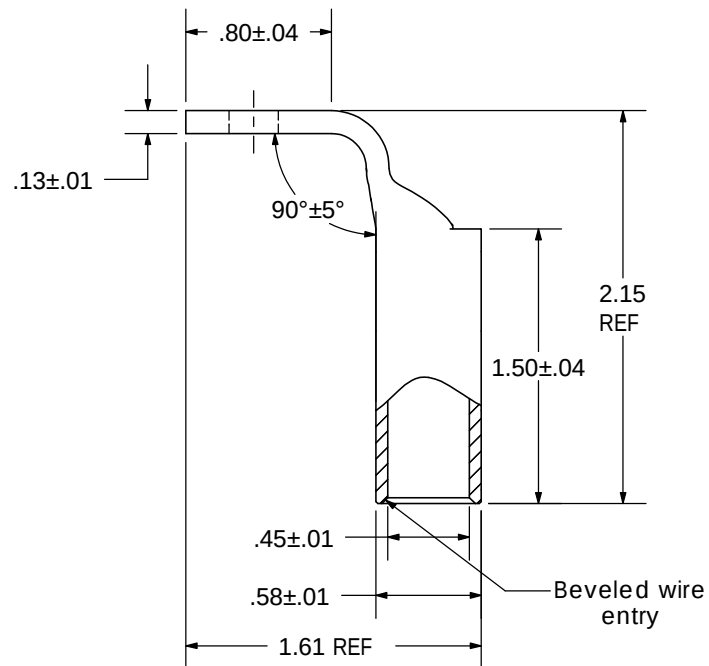

SCALE N/A	DRAWING NO / CAD FILE LCBX1 0-14F-CUST
--------------	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCBX1/0-14F-X](#)