



AAVID
THERMALLOY

Thin-Fin™ Heat Sinks

For computers and custom applications

LOW PROFILE COPPER HEAT SINKS IDEAL FOR PCI AND AGP CHIP SETS

When space is at a premium, Aavid's Thin-fin heat sinks reduce package case temperature by as much as 20°C. These flexible, copper spreaders attach to the electronic package using pre-applied adhesive, providing an off-the-shelf solution for PCI and AGP chip sets. A laminated dielectric coating prevents shorting, making the Thin-Fin ideal for BGA devices and multimedia applications.



FEATURES:

- Offer significant cooling with limited headroom
- Pre-applied adhesive for rapid assembly
- Dielectric coating prevents shorting
- Fits many IC package styles

APPLICATIONS:


- Graphics Processors
- FPGA's
- Embedded Processors
- DSP's
- Any device using a BGA, PGA, or a QFP package

ORDERING INFORMATION:

Part Number	"A"	"B"	"C"
341600F00000G	50.8 (2.00)	12.7 (0.50)	12.7 (0.50)
341700F00000G	76.2 (3.00)	12.7 (0.50)	12.7 (0.50)
341800F00000G	76.2 (3.00)	19.1 (0.75)	19.1 (0.75)
341900F00000G*	76.2 (3.00)	25.4 (1.00)	25.4 (1.00)
342000F00000G	101.6 (4.00)	25.4 (1.00)	25.4 (1.00)
342100F00000G	101.6 (4.00)	38.1 (1.50)	38.1 (1.50)

* Recommended for use in cooling microprocessor chip sets, such as PCI and AGP.

Notes: Dimensions are in mm (inches) Contact our Applications Engineering Department for custom configurations

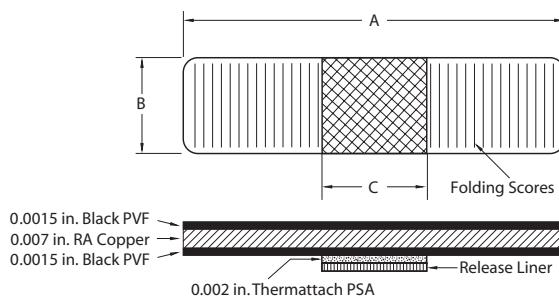

FOR MORE INFORMATION, VISIT OUR WEB SITE: WWW.AAVIDTHERMALLOY.COM
TEL: (603) 224-9988



Thin-Fin™ Heat Sinks

For computers and custom applications

PRODUCT SPECIFICATIONS:

Properties	Value
Color	Black
Total thickness (including adhesive)	0.33 mm (0.013 inches)
Weight	0.17 g/cm ² (0.039 oz/in ²)
Insulator	Polyvinylfluoride
Adhesive	Silicone PSA
Dielectric Strength	>1600 Volts/mil (ASTM D149)



Adhesion Performance

Lap Shear (at room temperature)	414 kPa (960 oz/in ²)
Lap Shear (at 100° C)	23 kPa (53 oz/in ²)
90° Peel (at room temperature)	441 g/cm (40 oz/in)
90° Peel (at 100° C)	220 g/cm (20 oz/in)

Thin-fin heat sinks have passed the following tests: heat aging, high temperature and humidity, temperature cycling, and temperature shock. Thin-fins meet UL 94V-0 flammability specification.



THERMAL PERFORMANCE:

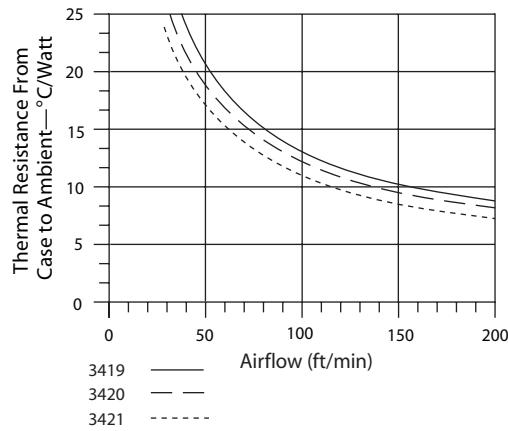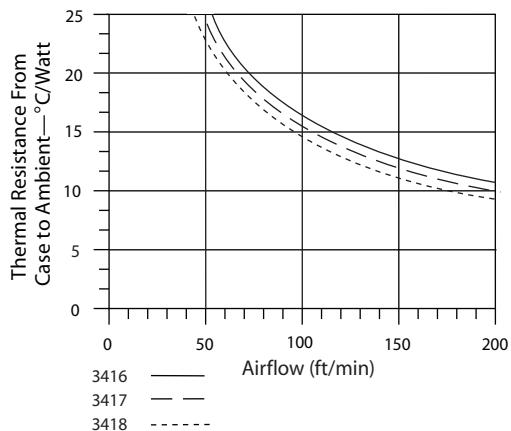

North America

80 Commercial Street
Concord, NH 03301
TEL: (603) 224-9988
FAX: (603) 223-1790
EMAIL: info@aavid.com

Europe - Italy

Via Aprile,32
40057 Cadriano (BO), Italy
TEL: (39) 051 764011
FAX: (39) 051 764090
EMAIL: sales.it@aavid.com

Europe - England

Cheney Manor
Swindon
SN2 2QN
England
TEL: 44(0) 1793 401400
FAX: 44(0)1793 615396
EMAIL: sales.uk@aavid.com

Asia - Taiwan

14F-4, NO. 79, Hsin Tai Wu RD.
SEC. 1, Hsi Chih
Taipei Hsien
Taiwan
TEL: 011(886) 2-2698-9888
FAX: 011(886) 2-2698-9808
EMAIL: sales.twn@aavid.com

Asia - Singapore

5 Woodlands Industrial Park E1
Singapore 757728
TEL: 65 -6362-8388
FAX: 65-6362-8588

PLEASE NOTE: Our customers are reminded that they bear the responsibility for testing Aavid Thermalloy's products for proposed use. Any information furnished by Aavid Thermalloy is believed to be accurate and reliable, but our customers must bear all responsibility for use and applications of Aavid Thermalloy products. AAVID THERMALLOY MAKES NO WARRANTIES EXPRESSED OR IMPLIED, AS TO THE FITNESS, MERCHANTABILITY, OR SUITABILITY OF ANY AAVID PRODUCTS FOR ANY SPECIFIC OR GENERAL USES. AAVID THERMALLOY SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND. All Aavid Thermalloy products are sold pursuant to the Aavid Thermalloy Domestic Terms and Conditions of Sale in effect from time to time, a copy of which shall be furnished upon request (8911A). Copyright © Aavid Thermalloy, LLC. March 2009. All icons, drawings, illustrations, and trademarks are the property of Aavid Thermalloy, LLC. and may not be reproduced without express written permission. (3/2009)

FOR MORE INFORMATION, VISIT OUR WEB SITE: WWW.AAVIDTHERMALLOY.COM
TEL: (603) 224-9988

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aavid](#):

[341600F00000G](#) [341700F00000G](#) [341800F00000G](#) [341900F00000G](#) [342000F00000G](#) [342100F00000G](#)