

PRODUCT NUMBER
SEE TABLE

$\phi .008/0.20$ (M) C (M) D (M)
MAX
AT TIPS

$.050$ [1.27]

DIM K $\pm .003$ [0.08]

-A-

DIM H $\pm .002$ [0.05]

$\phi .004/0.10$ A

-C-

$.125^{+.005}$ [3.18 $+0.13$]
 $-.000$ [-0.00]

$\phi .005/0.13$ B

-D-

$.225$ [5.71] -B-

X

SEE NOTE 10

$.050 \pm .003$ [1.27 ± 0.08]

TYP
NON-ACCUM.

DIM J

$.130$ [3.30]
INSERTION
DEPTH

DIM P
REF
HEIGHT ABOVE
BOARD

DIM N
 $\pm .010$ [0.25]
TAIL LENGTH

DIM R

NOTE 3

DRAIN HOLES
TYP

$\square .004/0.10$

SEE SHEET 3 FOR
LOCATOR/HOLDDOWN
VARIATIONS

$.050 \pm .003$ [1.27 ± 0.08]

TYP
NON-ACCUM.


DIM L

$\phi .010/0.25$ (M) A B
AT TIPS


mat'l. code -				surface ISO 1302 <input checked="" type="checkbox"/>		tolerance ISO 406 ISO 1101		projection 		product family RIBCAGE	
ltr				ecn no		dr		date		title	
L	J10329	CRG	6/6/01	tolerances unless otherwise specified		linear		.xx \pm .01/0.3		RIBCAGE III T/M	
M	M05-0123	MHT	6/6/05	angles		linear		.xxx \pm .005/0.13		VERT. HEADER ASS'Y	
N	M06-0225	ERE	06/12/06	0 \pm 2'		linear		.xxxx \pm .0020/0.051		scale 4:1	
P	M06-0370	MHT	9/26/06	dr	M. CORNMAN	6/6/95				dwg no sheet 1 of 6 size	
R	M09-0058	MHT	4/04/09	engr	D. WHITING	6/6/95				95776 A3	
S	N10-0122	YO	5/10/10	chr	D. WHITING	6/6/95				type Product Customer Drawing	
T	ELX-N-009749	YO	1/31/12	appd	D. WHITING	6/6/95					
sheet	revision	T	T	T	T	T	T				
index	sheet	1	2	3	4	5	6				

PRODUCT NUMBER
SEE TABLE

SIZE	DIM H	DIM J	DIM K	DIM L
2X5	.275/6.99	.200/5.08	.372/9.45	.320/8.13
2X10	.525/13.34	.450/11.43	.622/15.80	.570/14.48
2X15	.775/19.68	.700/17.78	.872/22.15	.820/20.83
2X20	1.025/26.03	.950/24.13	1.122/28.50	1.070/27.18
2X25	1.275/32.38	1.200/30.48	1.372/34.85	1.320/33.53
2X30	1.525/38.74	1.450/36.83	1.622/41.20	1.570/39.88
2X35	1.775/45.08	1.700/43.18	1.872/47.55	1.820/46.23
2X40	2.025/51.43	1.950/49.53	2.122/53.90	2.070/52.58
2X45	2.275/57.78	2.200/55.88	2.372/60.25	2.320/58.93
2X50	2.525/64.14	2.450/62.23	2.622/66.60	2.570/65.28

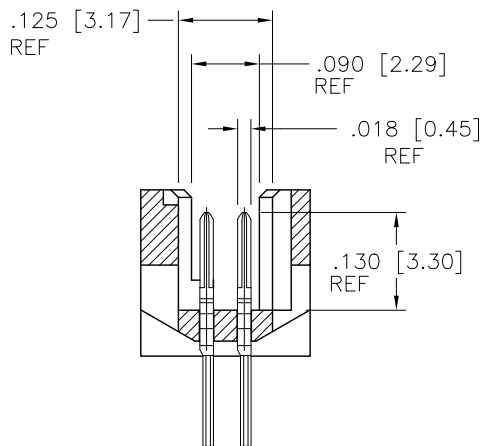

SECTION X-X
ROTATED 90° CW

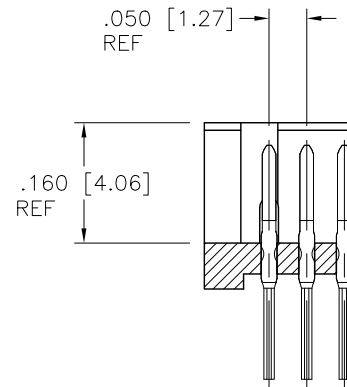

SECTION Y-Y

mat'l. code -		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection INCH/MM		product family RIBCAGE	
ltr	ecn	no	dr	date		tolerances unless otherwise specified		title	
T						angles	linear	RIBCAGE III T/M VERT. HEADER ASS'Y	
						0.01	.xxx±.005/0.13	scale 4:1	
						0.02	.xxxx±.0020/0.051	sheet 2 of 6	
						dr	M. CORNMAN	6/6/95	size
						engr	D. WHITING	6/6/95	A3
						chr	D. WHITING	6/6/95	
						appd	D. WHITING	6/6/95	
sheet index		revision sheet						type Product Customer Drawing	




PRODUCT NUMBER
SEE TABLE

LOCATOR/HOLDDOWN VARIATIONS



STYLE
1




STYLE
6

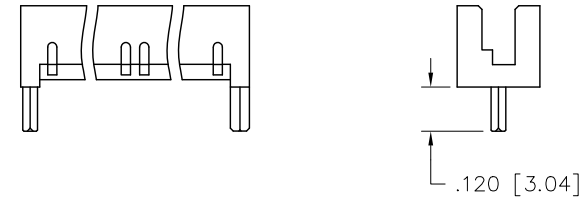


STYLE
2

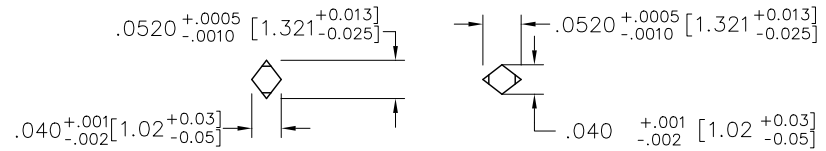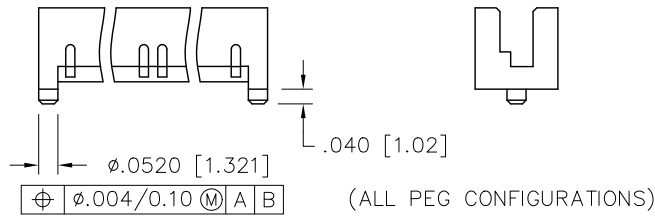

STYLE
4

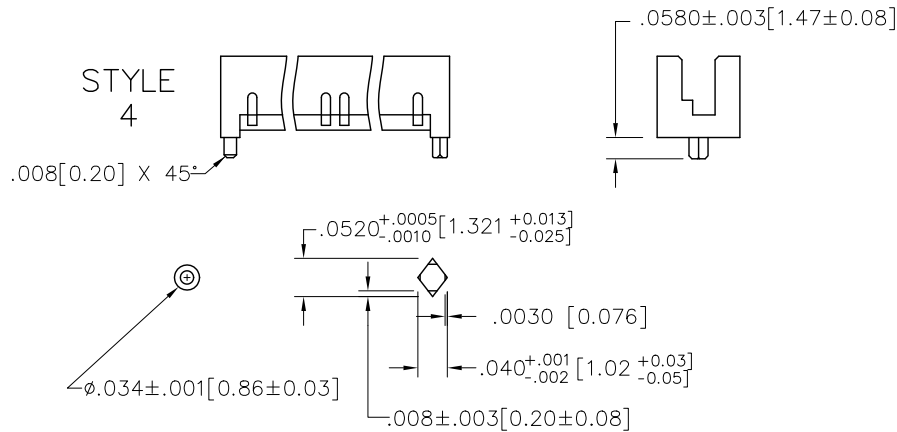






STYLE
7

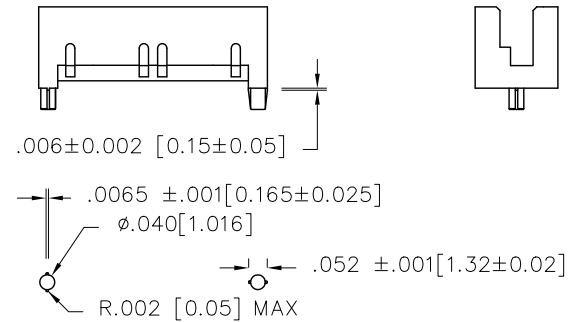

mat'l. code -		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection ISO 1101		product family RIBCAGE	
ltr	ecn	no	dr	date		tolerances unless otherwise specified		title	
T						angles	linear	INCH/MM	RIBCAGE III T/M
						0氣2?	.XX±.01/0.3	scale 4:1	VERT. HEADER ASS'Y
							.XXX±.005/0.13		dwg no
						dr	.XXXX±.0020/0.051		sheet 3 of 6
						enrg			size
						chr			95776
						appd			A3
									type
									Product Customer Drawing
sheet	revision								
index	sheet								

PRODUCT NUMBER
SEE TABLE





RECOMMENDED P. C. B. LAYOUT

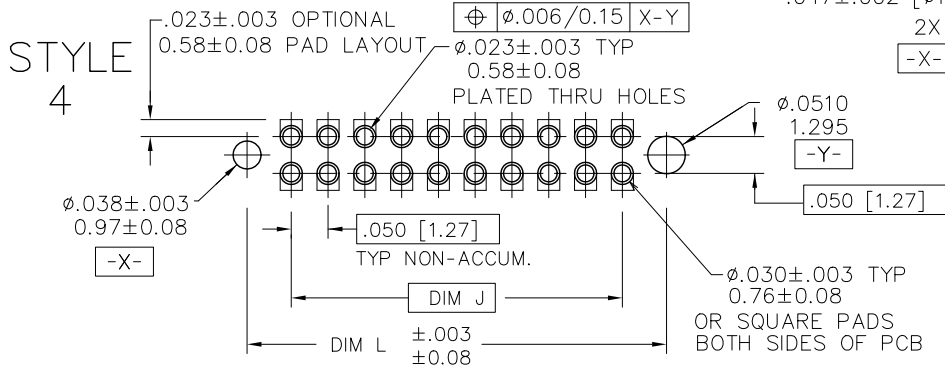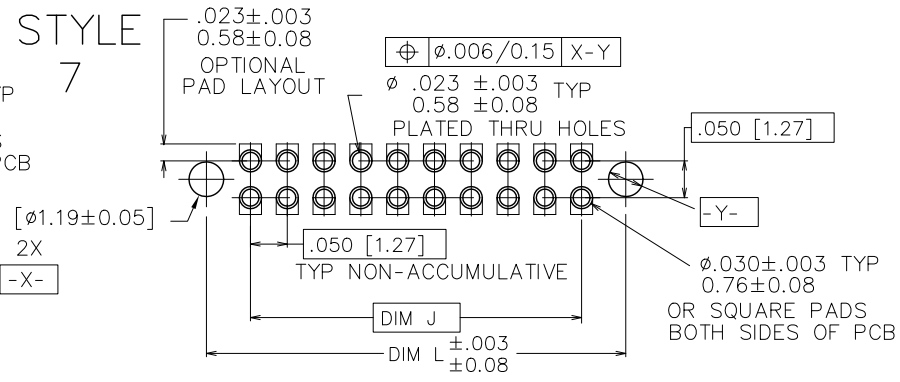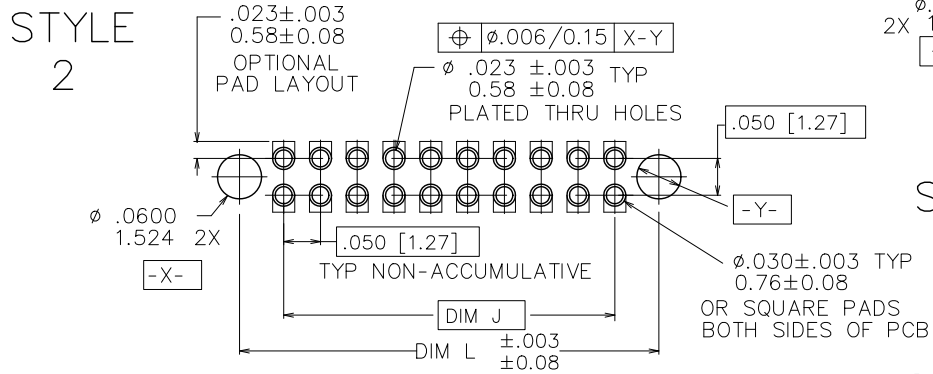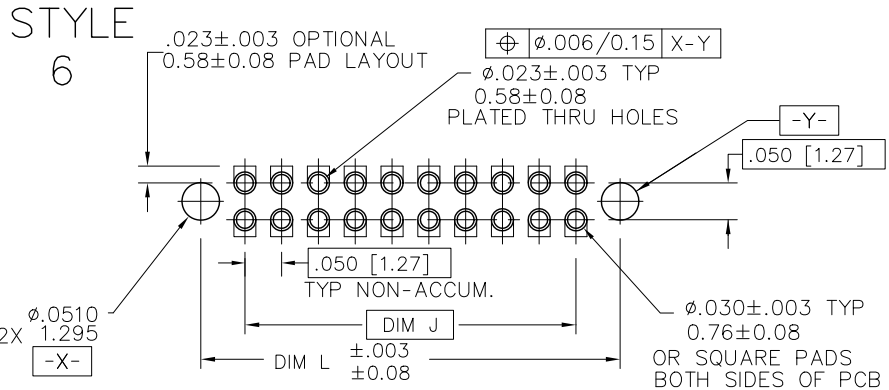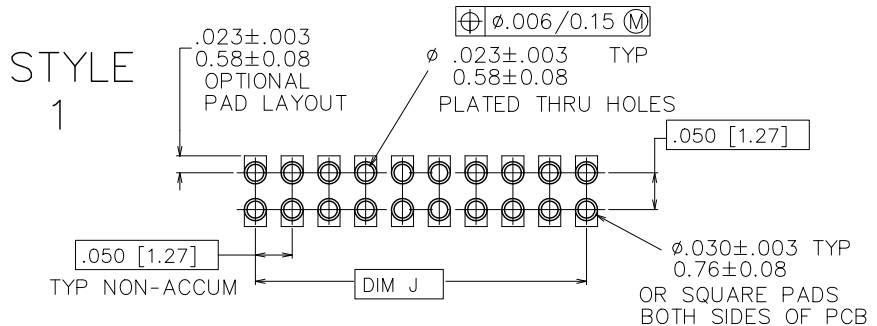

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				RIBCAGE	
ltr	ecn	no	dr	date		tolerances unless otherwise specified		title	
T						angles linear .XX±.01/0.3 .xxx±.005/0.13 .xxxx±.0020/0.051		RIBCAGE III T/M VERT. HEADER ASS'Y	
dr		M. CORNMAN		6/6/95		INCH/MM		dwg no	
enrg		D. WHITING		6/6/95		scale 4:1		sheet 4 of 6	
chr		D. WHITING		6/6/95				95776	
appd		D. WHITING		6/6/95				size A3	
sheet index		revision sheet						type Product Customer Drawing	

PRODUCT NUMBER
SEE TABLE

RECOMMENDED P. C. B. LAYOUT

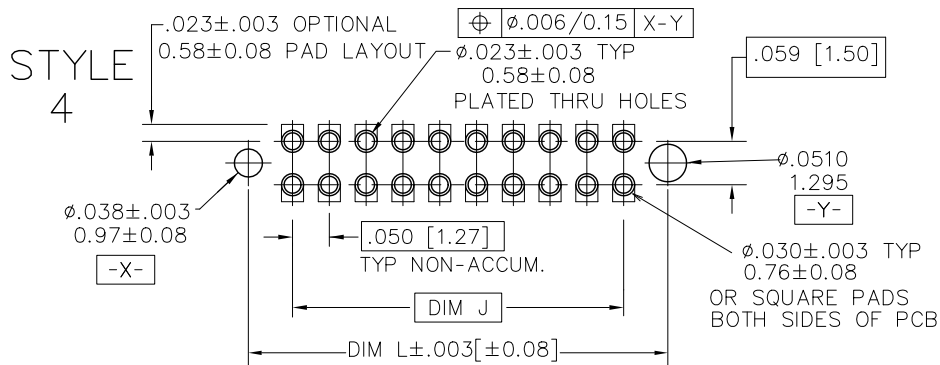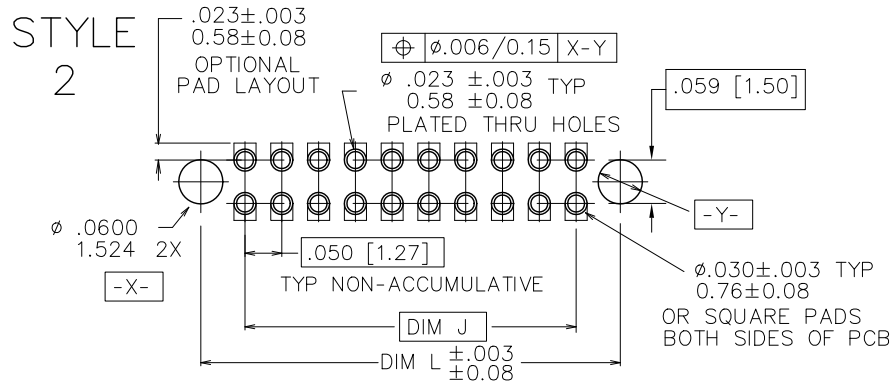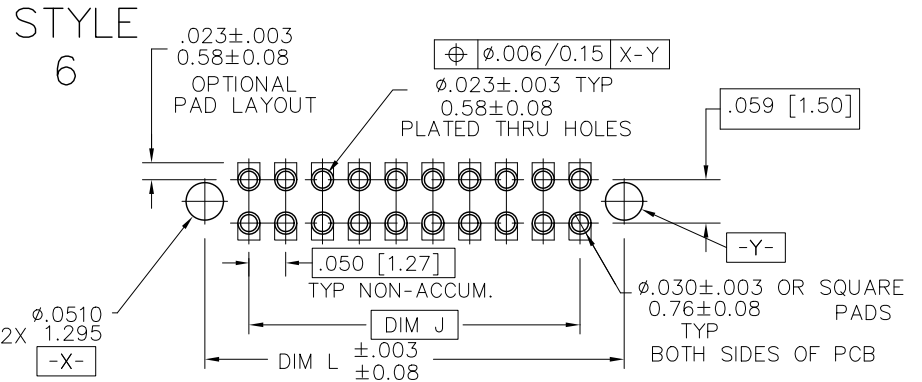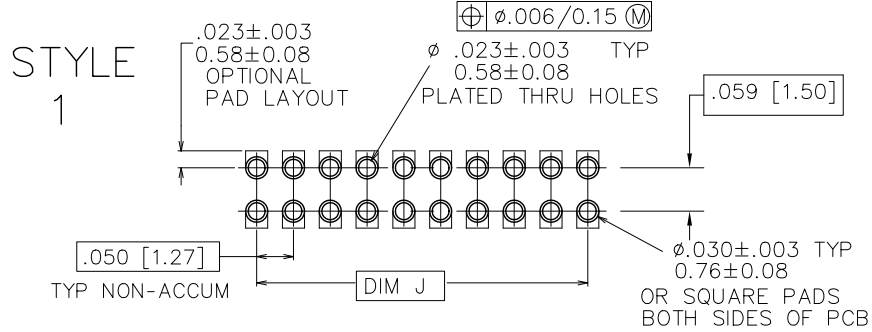

mat'l. code -		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family RIBCAGE	
ltr	ecn	no	dr	date		tolerances unless otherwise specified		title	
T						angles	linear	INCH/MM	RIBCAGE III T/M VERT. HEADER ASS'Y
						0氣2?			
							.XXX±.005/0.13		dwg no
						dr	M. CORNMAN	6/6/95	sheet 5 of 6
						enrg	D. WHITING	6/6/95	size
						chr	D. WHITING	6/6/95	95776
						appd	D. WHITING	6/6/95	A3
								type Product Customer Drawing	
sheet index	revision sheet								



Copyright FCI

PRODUCT NO. NOTE 1,7	DIM N SOLDER TAIL LENGTH	DIM P HEIGHT ABOVE BOARD (REF)	DIM R SOLDER TAIL SPREAD	HOLDDOWN STYLE
72449-1XX	.090/2.29	.221/5.63	.050/1.27	2
72450-1XX	.075/1.91	.293/7.44	↑	2
72451-1XX	.115/2.92	.221/5.63	↑	2
72452-1XX	.115/2.92	.221/5.63	↑	6
73541-1XX	.075/1.91	.293/7.44	↑	1
73543-1XX	.090/2.29	.359/9.12	↑	1
87407-1XX	.090/2.29	.221/5.63	↑	1
87850-1XX	.075/1.91	↑	↑	2
87851-1XX	.075/1.91	↑	↑	6
88550-1XX	.135/3.43	↑	↑	2
89289-1XX	.075/1.91	↑	↑	1
89465-1XX	.115/2.92	↑	↑	1
93149-1XX	.075/1.91	↓	↑	4
98382-1XX	.090/2.29	.221/5.63	↑	7
98383-1XX	.090/2.29	.293/7.44	↑	1
98384-1XX	.090/2.29	.293/7.44	↓	7
98385-1XX	.090/2.29	.359/9.12	.050/1.27	7

PRODUCT NO. NOTE 1,7	DIM N SOLDER TAIL LENGTH	DIM P HEIGHT ABOVE BOARD (REF)	DIM R SOLDER TAIL SPREAD	HOLDDOWN STYLE
87400-1XX	.075/1.91	.221/5.63	.059/1.50	2
87405-1XX	.075/1.91	↑	↑	1
87405-2XX	.090/2.29	↑	↑	1
87406-1XX	.075/1.91	↓	↑	6
87406-2XX	.100/2.54	↓	↑	6
87410-1XX	.090/2.29	.221/5.63	↑	2
87411-1XX	.075/1.91	.293/7.44	↑	2
87412-1XX	.115/2.92	.221/5.63	↓	2
89297-1XX	.115/2.92	.221/5.63	.059/1.50	6

NOTES:

- ① XXXXX-XXXLF
 - └ LEAD FREE OPTION (NOTE 7,8)
 - └ NUMBER OF POSITIONS (NOTE 2)
- ② NUMBER OF POSITIONS = 05 THRU 50 IN 5 POS INCREMENTS.
(EXAMPLE: 105=10 POS., 110=20 POS. ETC.)
- ③ REQUIRED ON -X40,-X45 & -X50 POSITION PARTS ONLY.
4. PACKAGE PER BUS-14-179.
5. HOUSING MATERIAL:
GLASS FILLED THERMOPLASTIC FLAME RETARDANT
PER UL 94V-0.
COLOR: NATURAL
6. TERMINAL PLATING:
30u"/.76u MIN HARD GOLD OR GXT OVER 50u"/1.27u Ni ON
CONTACT ZONES.
100u"/2.54u MIN Sn OVER 50u"/1.27u Ni IN
SOLDERING ZONES.
- ⑦ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR
LEAD FREE OPTION.

8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm
MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES
IF THEY ARE AVAILABLE.
- ⑩ MOLDING FLOW RESTRICTOR QUANTITY AND LOCATION IS
MANUFACTURING OPTION.
- ⑪ VACUUM CAP SLOT REQUIRED ON ALL SIZES, SLOT MAY
BE LOCATED ON OPPOSITE SIDE FOR 2 X 5.
12. PRODUCT SPECIFICATION PER BUS-12-087.

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				RIBCAGE	
ltr	ecn	no	dr	date		tolerances unless otherwise specified		title	
T						angles linear .XX±.01/0.3 .XXX±.005/0.13 0氣2? .XXXX±.0020/0.051		INCH/MM scale 4:1	
		dr		M. CORNMAN		6/6/95		dwg no	
		enrg		D. WHITING		6/6/95		sheet 6 of 6	
		chr		D. WHITING		6/6/95		size	
		appd		D. WHITING		6/6/95		95776	
								A3	
								type Product Customer Drawing	
sheet index		revision sheet							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[87407-105LF](#) [87407-105](#) [87407-110](#) [87407-115](#) [87407-120](#) [87407-125](#) [87407-130](#) [87407-135](#) [87407-140](#) [87407-145](#) [87407-150](#) [89297-150](#) [87407-110LF](#) [87407-115LF](#) [87407-120LF](#) [87407-125LF](#) [87407-130LF](#) [87407-135LF](#) [87407-140LF](#) [87407-145LF](#) [87407-150LF](#) [87410-105LF](#) [87410-110LF](#) [87405-105](#)