

PERFORMANCE CHARACTERISTICS :




CURRENT RATING : 1.5A AT 20°C (FULLY LOADED)
 1A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500V AC (CONT / CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 25mΩ MAX.
 INSERTION FORCE : 0.75 N MAX / CONT
 EXTRACTION FORCE : 0.15 N MIN / CONT
 INSULATION RESISTANCE : 10⁴MΩ MIN.

NOTES :

1. UL APPROVED WITH USR AND CNR.
2. MEASURED AT THE BOTTOM.
3. MATERIAL CONTACT : PHOSPHORBRONZE.
HOUSING : LCP 30% GLASS-FILLED.
4. CONNECTOR PRINTED WITH P/N AND DATE CODES.
5. FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.)
6. 4 = LEVEL 1 (5.30)
5 = LEVEL 2 (6.80)
6 = LEVEL 3 (8.30)

LEAD FREE INDICATOR : LF = LEAD FREE


7. 'HM2J07PE5110--' PERFORMANCE LEVEL INDICATOR
(Ref DWG No BS,C ,201844,003)
8. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS,A ,201572,001
9. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004

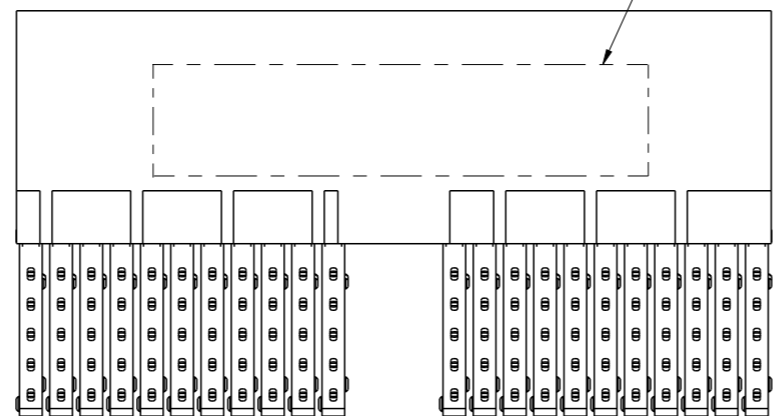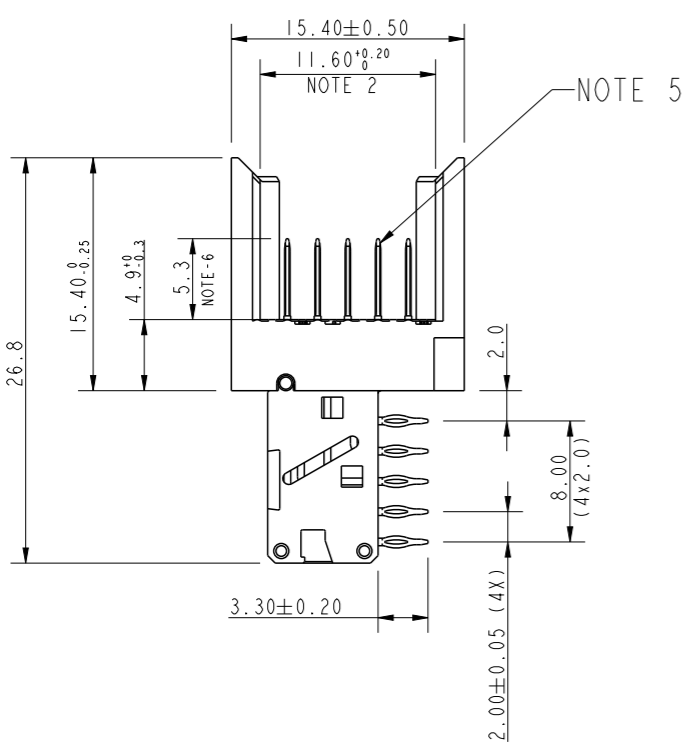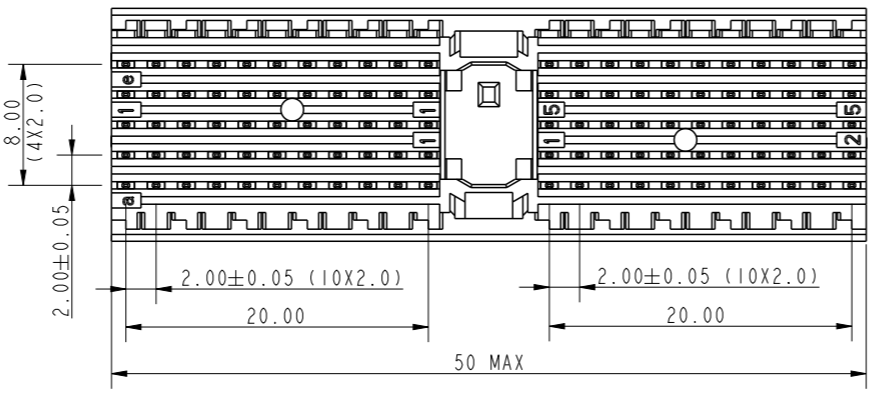

LOADING PATTERN : MATING SIDE

F	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
E	4	4	4	4	4	4	4	4	4	4	X	X	X	4	4	4	4	4	4	4	4	4	4	4	
D	4	4	4	4	4	4	4	4	4	4	X	X	X	4	4	4	4	4	4	4	4	4	4	4	
C	4	4	4	4	4	4	4	4	4	4	X	X	X	4	4	4	4	4	4	4	4	4	4	4	
B	4	4	4	4	4	4	4	4	4	4	X	X	X	4	4	4	4	4	4	4	4	4	4	4	
A	4	4	4	4	4	4	4	4	4	4	X	X	X	4	4	4	4	4	4	4	4	4	4	4	
Z	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25

PCB HOLE LAY-OUT

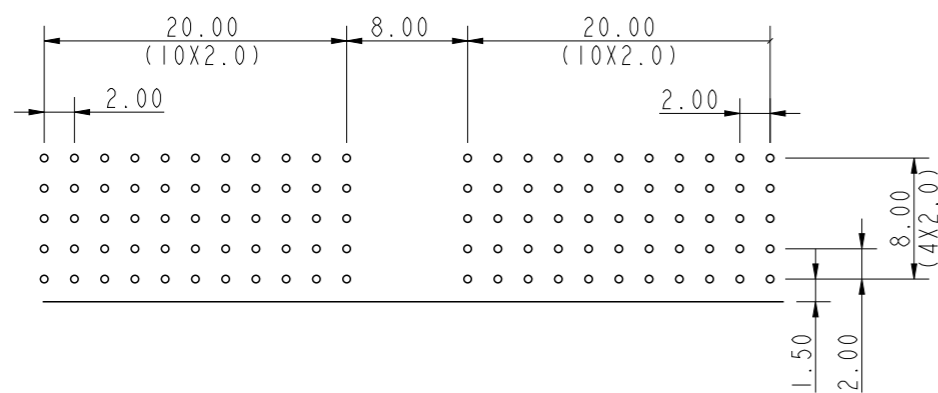

spec ref	-		dr	P-Mathew Nebu	2011/05/24	projection		size	A3	scale	1/1		
tolerance std	ISO 406 ISO 1101		eng	Alex Babu	2019/07/22	mm		ecn no	ELX-I-26926-1				
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	appr	Kuriakose, San	2019/11/12	product family	MILLIPACS		rel level	Released		
surface	linear	0.X	±0.2	Amphenol FCi	MPACS RA HDR		cat. no.	HM2J07PE5110----		dwg no	BSC202767008	rev	H
		0.XX	±0.1		Type A, Non Shielded			Product - Customer Drw	sheet 1 of 1				
	angular	0°	±1°										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2J07PE5110N9](#)