

UNCONTROLLED DOCUMENT

PART NUMBER	SSL-LX509F3GD-12V	REV.	Α
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
11.02.06	E.C.N. #11148		Α



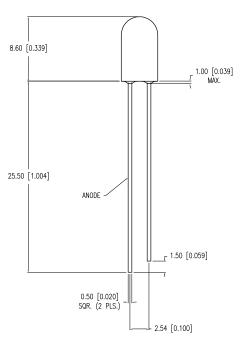



ELECTRO-OPTICAL	CHARACTERISTICS	$T_A = 25^{\circ}C$	$V_f = 12V$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		12.0	14.0	V f	
REVERSE VOLTAGE	5.0			۷'n	$I_r = 100 \mu A$
AXIAL INTENSITY		16		mcd	$V_f = 12V$
VIEWING ANGLE		30		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN DIF	FUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD VOLTAGE*	14	٧
STEADY CURRENT	11.5	mA
POWER DISSIPATION	120	mW
DERATE FROM 25°C	- 1.2	mW/*C
DPERATING, STORAGE TEMP.	-40 TO +85	•c
SOLDERING TEMP.	+ 260	.C
2.0mm FROM BODY	3	SEC. MAX

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+DECIMAL}_{-0.00}$ PRECISION UNCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM T-5mm (T-1 3/4) 565nm GREEN LED, GREEN DIFUSED LENS, 12V OPERATION.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL REPRAID IN FORMATION CONTAINED HERBIN CONFIDENTIAL AND SHALL PROFICE TAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

ALCOOIGH					
	DATE:	04.27.10	DRAWN BY:	JH	
	PAGE:	1 OF 1	CHKD BY:	SS	
	SCALE:	N/A	APRVD BY:	KF	
L	UNIT:	mm [INCH]	Pb A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX509F3GD-12V