


DATE	REV	ECN	APP'D. BY
1-5-15	A5	10169	TRM
3-16-16	A6	10612	TRM

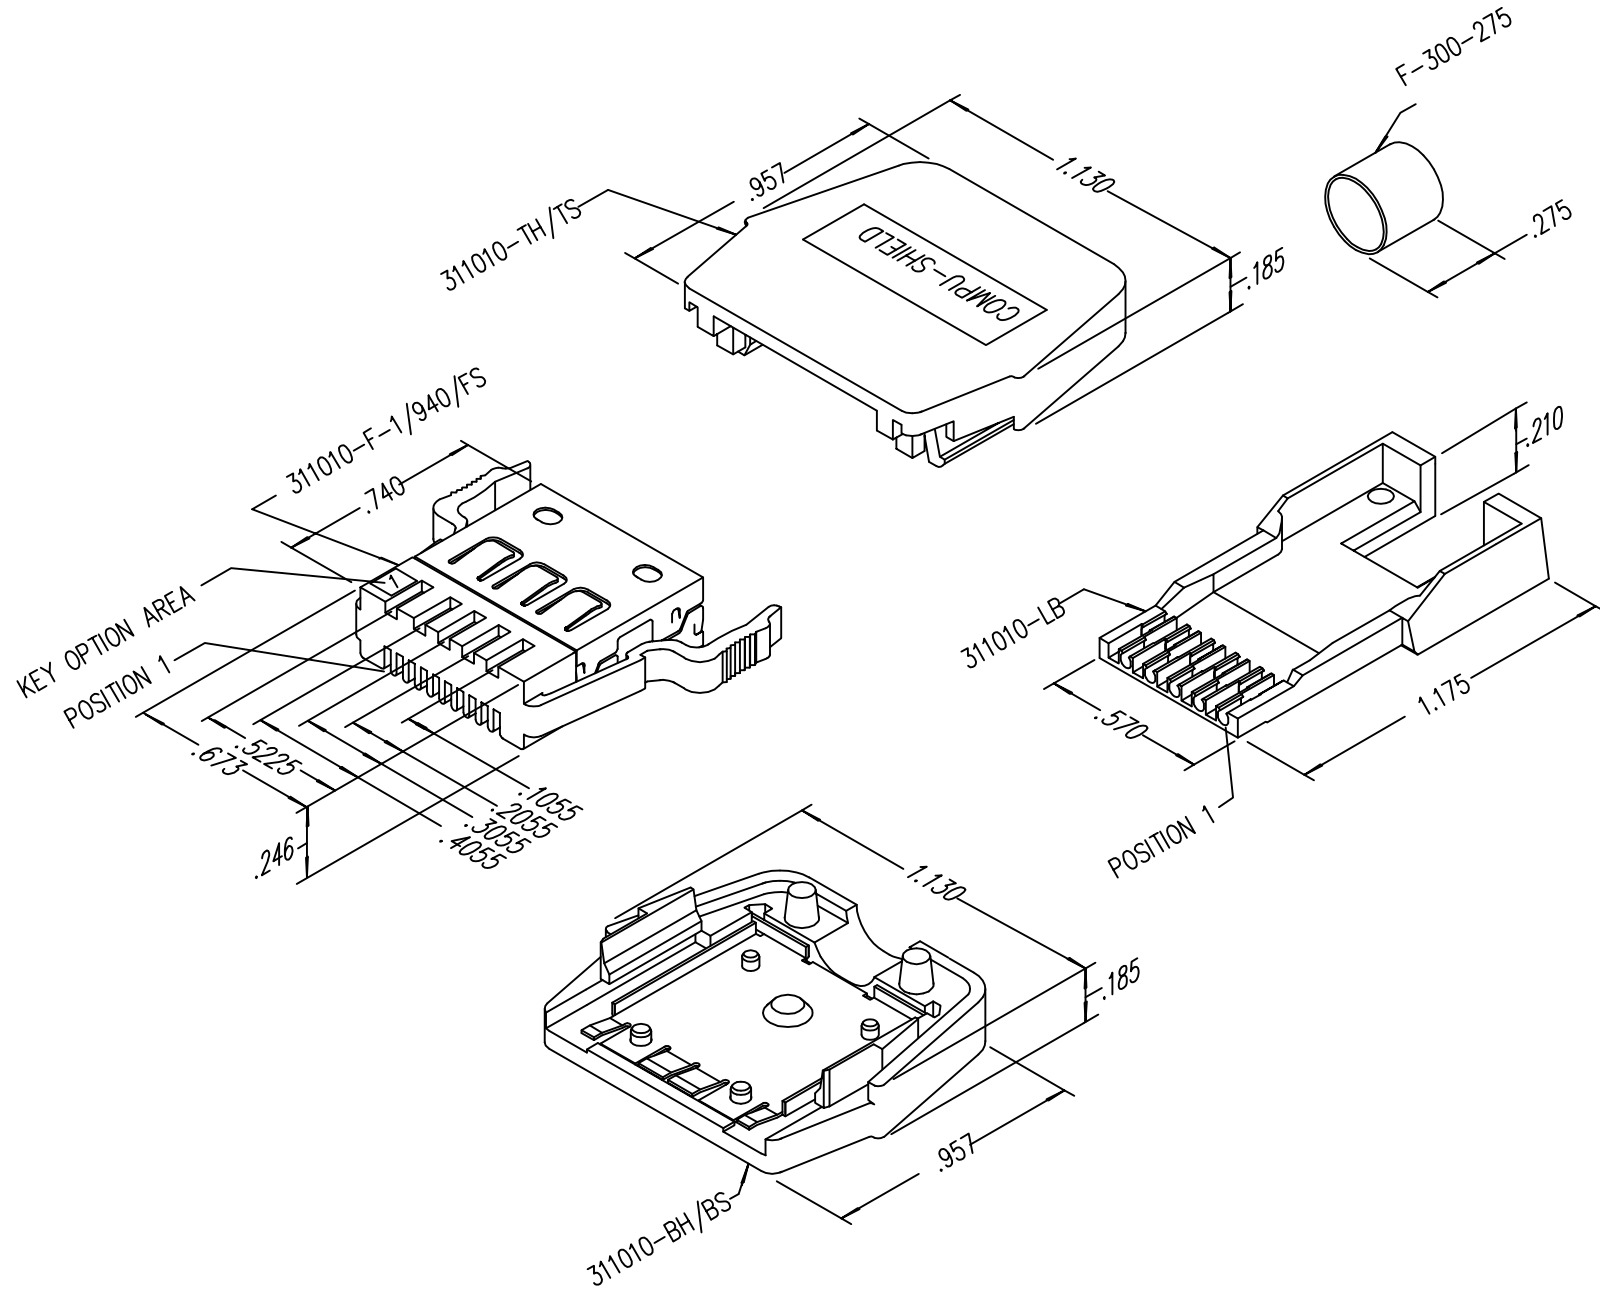

- NOTES:
1. PLUG MATERIALS:  
TOP/BOTTOM HOUSING: PC UL94 V-0 COLOR: BLACK  
FRONT PLASTIC: PC UL94 V-0 COLOR: BLUE  
LOAD BAR: PC UL94 V-0 COLOR: CLEAR  
CONTACTS/SHIELD: COPPER ALLOY  
SHIELD PLATING: TIN  
FERRULE PLATING: NICKEL OR TIN  
CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA  
SEE CHART FOR PART NUMBER
  2. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS  
UP TO .042" OUTSIDE DIAMETER OF INSULATION
  3. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
  4. HOUSING WILL ACCEPT CABLE UP TO .220" OUTSIDE DIAMETER OF JACKET
  5. FOR PRODUCT SPECIFICATIONS SEE PR026-01
  6. TERMINATED PLUG HEIGHT .234±.002 ON CABLE

BULK	50 MICRO-INCHES [1.27um]	SS-311010-1
PACKAGE	CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION

**stewart**  
CONNECTOR  
a bel group

11118 Susquehanna Trail South  
Glen Rock, PA 17327-9199  
(717) 235-7512  
<http://www.stewartconnector.com>

DO NOT SCALE DRAWING  
DRAWING IS SUBJECT TO  
CHANGE WITHOUT NOTICE

TITLE:  
10X10 COMPU-SHIELD PLUG FINAL ASSEMBLY

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE ±.005 [0.13]  
ANGLES ARE ± 1°

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON  
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF  
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,  
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN  
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS  
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE  
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART\\_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: TRM DATE 5-15-01

APPD BY: TRM DATE 5-16-01

DWG NO. CT310030 REV. A6

SHEET NO. 1 OF 1

RoHS



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[SS-311010-1](#)