


|                 |                           |
|-----------------|---------------------------|
| COIL: @ 25°C    |                           |
| RESISTANCE      | 300 OHMS ± 10%            |
| NOMINAL VOLTAGE | 28.0 VDC                  |
| MUST OPERATE    | 13.0 VDC                  |
| MUST RELEASE    | 7.0 VDC MAX, 1.5 VDC MIN. |

|              |                             |
|--------------|-----------------------------|
| ENVIRONMENT: |                             |
| VIBRATION    | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK        | 50 g's 11 MS. DURATION      |
| TEMPERATURE  | -70 °C TO +125 °C           |

NOTES: OPERATE & RELEASE 10 MS MAX.  
 OPERATE BOUNCE 2 MS MAX.  
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

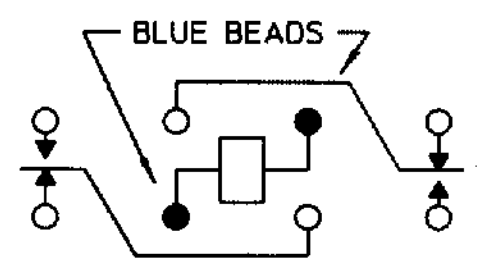

|                                |
|--------------------------------|
| CONTACT RATING: 10 AMPS 28 VDC |
| 115 VAC/400 HZ, 1 PHASE,       |
| 115/200 VAC, 3 PHASE RESISTIVE |
| 100,000 OPERATIONS             |

DR. R.B. 4/14/94 CK. 4/14/94



CUST. OPL  
 CUST. NO. MS27245-5

TYPE '07' RELAY

B07E932BC4-0262

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07E932BC4-0262](#)