


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	1/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-9/16 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	PINK
Panduit Die Index No. on Barrel	P42
Alternate Industry Die Index No. () on Barrel	(12)



Technical drawing of a Panduit 1/O STR/FLEX LCCX1/O-14AF connector. The drawing shows a side view of the connector with dimensions and labels. The top dimension is $.85 \pm .04$. The bottom dimension is $.35 \pm .04$. The length of the main body is $.63 \pm .02$. The diameter of the circular feature is $.27 \pm .02$ DIA (2) PLS. A label "Wire inspection window" points to a feature on the right side. The connector is labeled "PANDUIT", "1/O STR/FLEX", and "LCCX1/O-14AF".

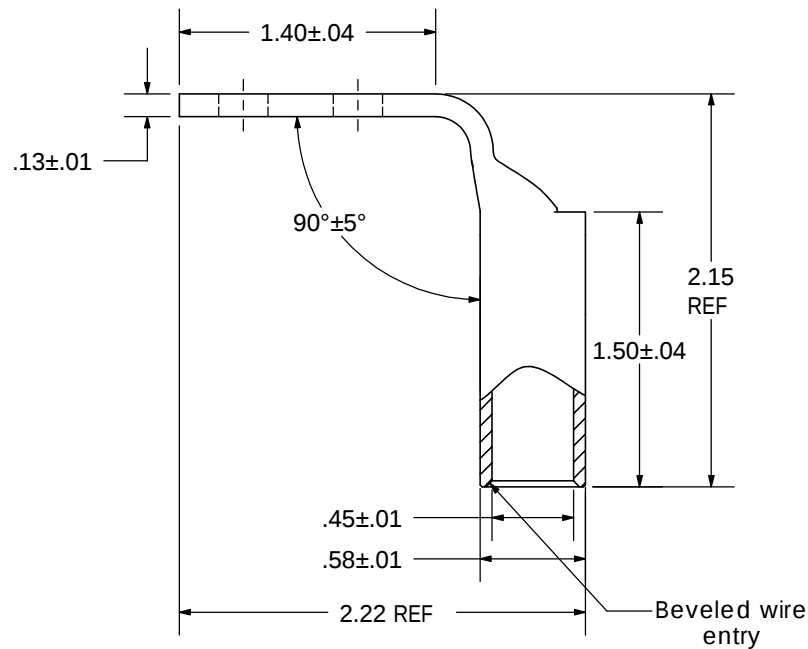

00	6/03	SAC	SAC	RELEASED	10850
REV	DATE	BY	CHK	DESCRIPTION	ECN

SCALE	N/A
-------	-----

DRAWING NO / CAD FILE

LCCX1 0-14AF-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCX1/0-14AF-X](#)