


DO NOT SCALE
DIMENSIONS IN mm


METRIC

THIRD ANGLE
PROJECTION



NOTES:

- 1 FOR MINI-APPLICATOR-CRIMPING.
- 2 UNDERCOATING: 1,25µm Ni, SELECTIVE: 0,8µm Au, ZONE 1: 0,5µm MIN. GOLDFLASH.
- 3 UNDERCOATING: 1,25µm Ni, SELECTIVE: 0,8µm Au, REMAINDER: GOLDFLASH.
- 4 UNDERCOATING: 1,25µm Ni, SELECTIVE: 0,4µm Au, NO GOLDFLASH.
- 5 ~~ZONE 1: BRIGHT TIN/LEAD PLATED.~~
- 6 MATERIAL: PHOSPHORBRONZE
- 7 FOR STANDARD-APPLICATOR-CRIMPING.
- 8 FOR REELFEED-HANDTOOL-CRIMPING, 500 CONTACTS ON A SMALL REEL.
- 9 24-20 AWG (0,20-0,56 mm²) WITH .055 CRIMPER.
26 AWG (0,12-0,14 mm²) WITH .042 CRIMPER.

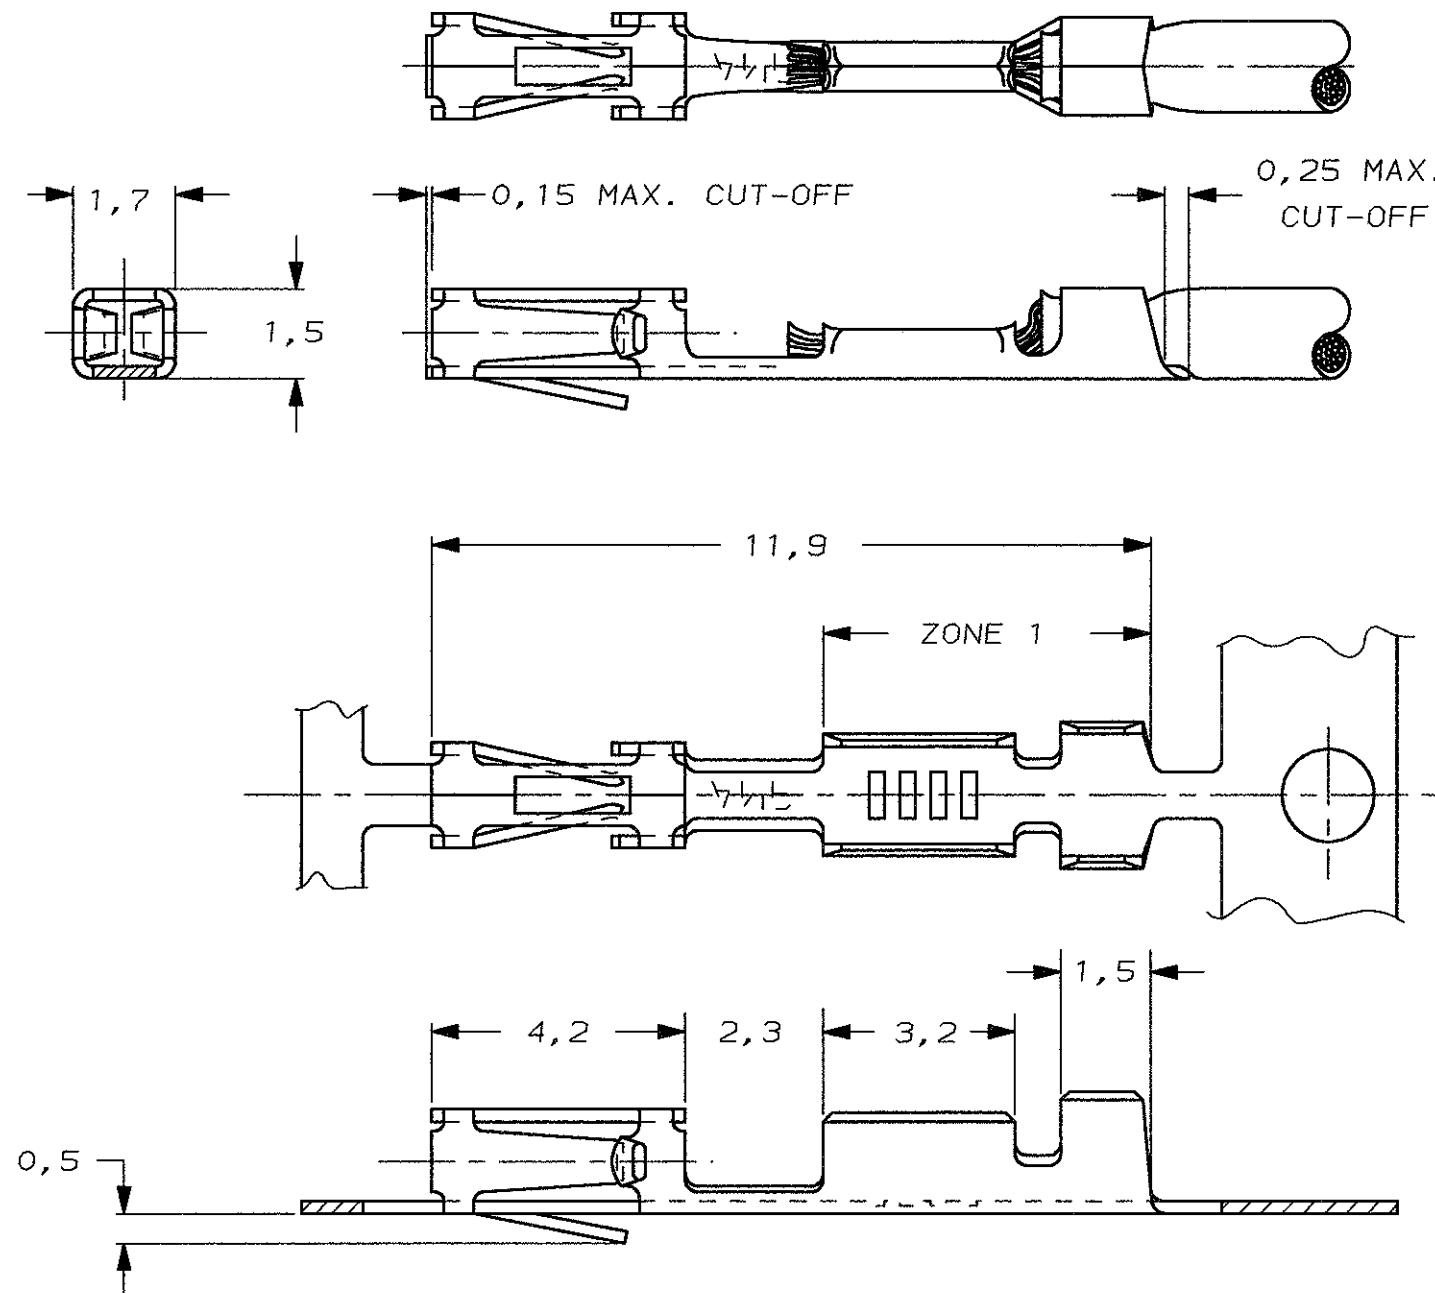

GOLD	2	141603-4	5-167300-8	8
GOLD	4	≠	1-167300-6	1
			1-167300-5	2
GOLD	2	141603-4	167300-8	1
			167300-7	2
GOLD	3	141603-3	167300-6	1
			167300-5	2

					FINISH	LOOSE PIECE	PARTNUMBER
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—
F EH-2039-98					JvL	JvL	03-12-98
LTR.	REVISION RECORD			DR.	CHK.	DATE	
DR.:	J.v.LIEMPT	CHK.:	J.v.LIEMPT	APP.:	E.LEIJTENS	DWG.No.	C-167300
DATE:	03 DEC 98	DATE:	—	DATE:	—	REV.LTR.	F
						SHEET	1 OF 1
						A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[167300-6](#)