


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	54		D	ECO-07-012863	13JUN07	KW	DB
			D1	REVISED PER ECO-09-023313	09OCT09	KK	AEG

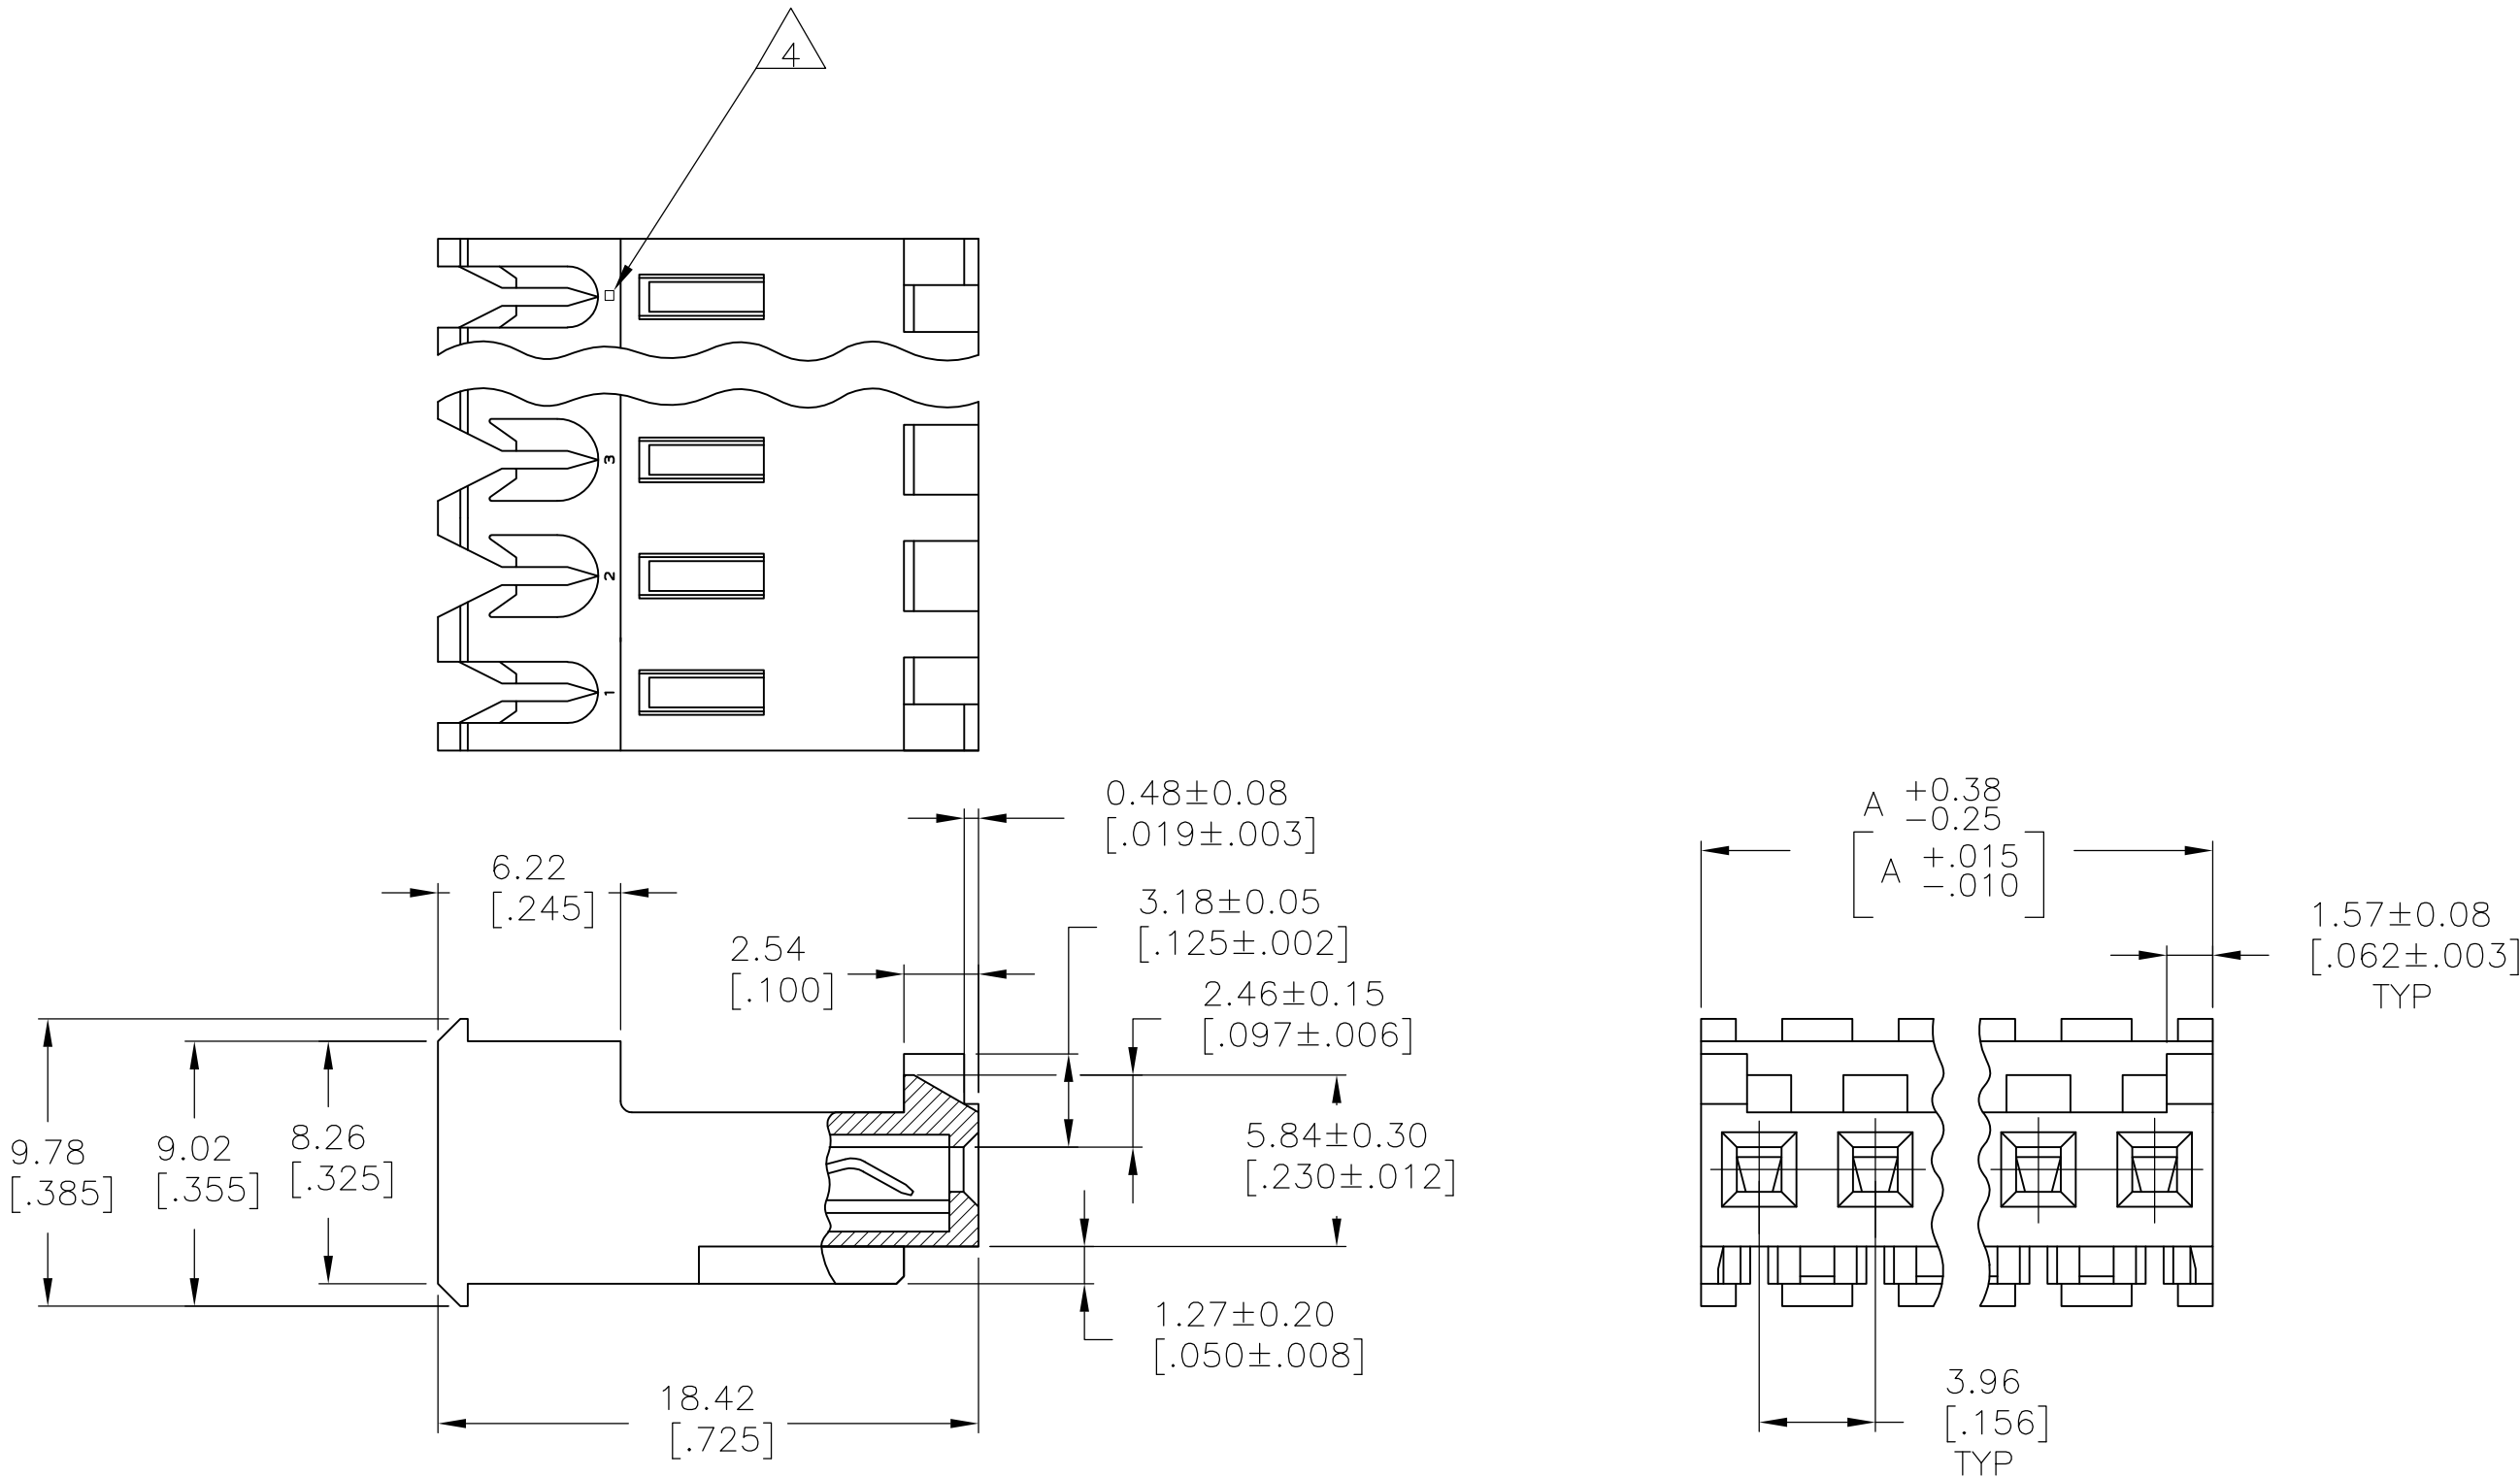

1 MATERIAL: CONNECTOR — NYLON UL94V-2 (WHITE).
CONTACTS — 0.30[.012] THICK COPPER ALLOY
BRIGHT TIN-LEAD 0.00203[.000080] MIN THICK
FOR CONTACTS 644468-2 THRU 1-644468-4
MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN
THICKNESS OVER NICKEL UNDERPLATE FOR
3-644468-2 THRU 4-644468-4

2. CONTACTS ACCEPT 24 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
3. CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.


4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6. HOUSING FEATURES ARE: FEED-THRU WITH LOCKING RAMP AND POLARIZING TAB.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7	SUPERSEDED	55.47	[2.184]	14	4-644468-4
7	SUPERSEDED	51.51	[2.028]	13	4-644468-3
7	SUPERSEDED	47.55	[1.872]	12	4-644468-2
7	SUPERSEDED	43.59	[1.716]	11	4-644468-1
7	SUPERSEDED	39.62	[1.560]	10	4-644468-0
7	SUPERSEDED	35.66	[1.404]	9	3-644468-9
7	SUPERSEDED	31.70	[1.248]	8	3-644468-8
7	SUPERSEDED	27.74	[1.092]	7	3-644468-7
		23.77	[.936]	6	3-644468-6
		19.81	[.780]	5	3-644468-5
		15.85	[.624]	4	3-644468-4
		11.89	[.468]	3	3-644468-3
		7.92	[.312]	2	3-644468-2
7	SUPERSEDED	55.47	[2.184]	14	1-644468-4
7	SUPERSEDED	51.51	[2.028]	13	1-644468-3
7	SUPERSEDED	47.55	[1.872]	12	1-644468-2
7	SUPERSEDED	43.59	[1.716]	11	1-644468-1
7	SUPERSEDED	39.62	[1.560]	10	1-644468-0
7	SUPERSEDED	35.66	[1.404]	9	644468-9
7	SUPERSEDED	31.70	[1.248]	8	644468-8
7	SUPERSEDED	27.74	[1.092]	7	644468-7
		23.77	[.936]	6	644468-6
7	SUPERSEDED	19.81	[.780]	5	644468-5
		15.85	[.624]	4	644468-4
		11.89	[.468]	3	644468-3
		7.92	[.312]	2	644468-2
		DIM A		NO. OF CIRCUITS	PART NO

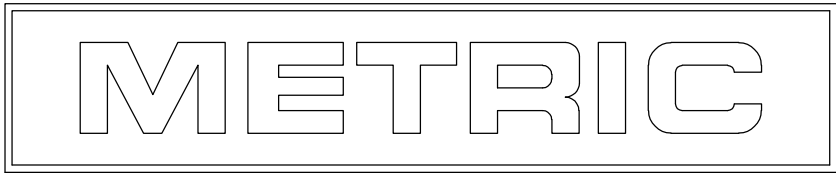

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 12 FEB 91	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK R. SWING 12 FEB 91	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH 1		APVD D. CLARK 20 FEB 91	MTA-156 CONNECTOR ASSEMBLY, 24 AWG, STANDARD	
MATERIAL 1		PRODUCT SPEC 108-1051	SIZE A2	CAGE CODE 00779
		APPLICATION SPEC 114-1020	DRAWING NO C=644468	RESTRICTED TO -
		WEIGHT -	SCALE 4:1	SHEET 1 OF 1
		CUSTOMER DRAWING	REV D1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-644468-6](#)