

Sensor/actuator cable - SAC-3P- 5,0-500/A - 1438804

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Sensor/actuator cable, 3-position, PVC, gray RAL 7001, free cable end, on Valve connector A, cable length: 5 m

The figure shows a version with a black line



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 488846
GTIN	4046356488846

Technical data

Dimensions

Length of cable	5 m
Stripping length of the free conductor end	50 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)
Degree of protection	IP65
	IP67

General

Rated current at 40°C	6 A
Rated voltage	230 V
	24 V DC
Number of positions	3
Insulation resistance	≥ 100 MΩ
Standards/regulations	Valve connector EN 175301-803
Protective circuit/component	unwired
Overvoltage category	III

Sensor/actuator cable - SAC-3P- 5,0-500/A - 1438804

Technical data

General

Degree of pollution	3
---------------------	---

Material

Flammability rating according to UL 94	V0
Valve plug contact material	CuSn
Valve plug contact surface material	Sn
Valve plug contact insert material	PA 6.6
Material housing valve plug	TPU
Sealing material	TPU (Seal molded)

Standards and Regulations

Standard designation	Valve connector
Standards/regulations	EN 175301-803
Flammability rating according to UL 94	V0


Cable

Cable type	PVC gray
Cable type (abbreviation)	500
Cable abbreviation	LiYY
Conductor cross section	3x 0.5 mm ² (Signal line)
AWG signal line	20
Conductor structure signal line	16x 0.20 mm
Core diameter including insulation	1.5 mm ±0.05 mm (Signal line)
Wire colors	black 1, black 2, green/yellow
Overall twist	Wires twisted in layers
External sheath, color	gray RAL 7001
External cable diameter D	4.8 mm ±0.2 mm
Smallest bending radius, fixed installation	24 mm
Outer sheath, material	PVC
Material conductor insulation	PVC
Conductor material	Bare Cu litz wires
Insulation resistance	min. 20 MΩ*km
Conductor resistance	39 Ω/km (at 20 °C)
Nominal voltage, cable	300 V
Test voltage, cable	1200 V
Flame resistance	DIN EN 50265-2-1
Resistance to oil	largely oil-resistant
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (cable, flexible installation)

Drawings


Sensor/actuator cable - SAC-3P- 5,0-500/A - 1438804

Schematic diagram




Valve connector pin assignment, type A

Cable cross section




PVC gray [500]

Dimensional drawing




Valve connector, type A

Dimensional drawing



Valve connector, type A, side view

Circuit diagram

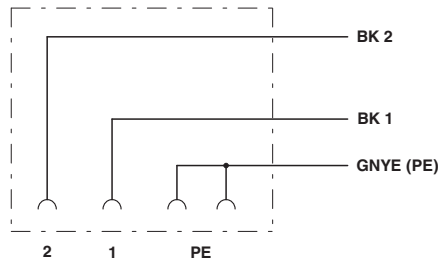

Contact assignment of the valve plug

Approvals

Approvals

Approvals


CSA / CSAus / EAC / cCSAus


Ex Approvals

Approval details


Sensor/actuator cable - SAC-3P- 5,0-500/A - 1438804

Approvals

CSA		http://www.csagroup.org/services-industries/product-listing/	13631
Nominal voltage UN		230 V	
Nominal current IN		6 A	

CSAus		http://www.csagroup.org/services-industries/product-listing/	13631
Nominal voltage UN		230 V	
Nominal current IN		6 A	

EAC			RU C- DE.AI30.B.00767
-----	--	--	--------------------------

cCSAus			
--------	---	--	--

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1438804](#)