


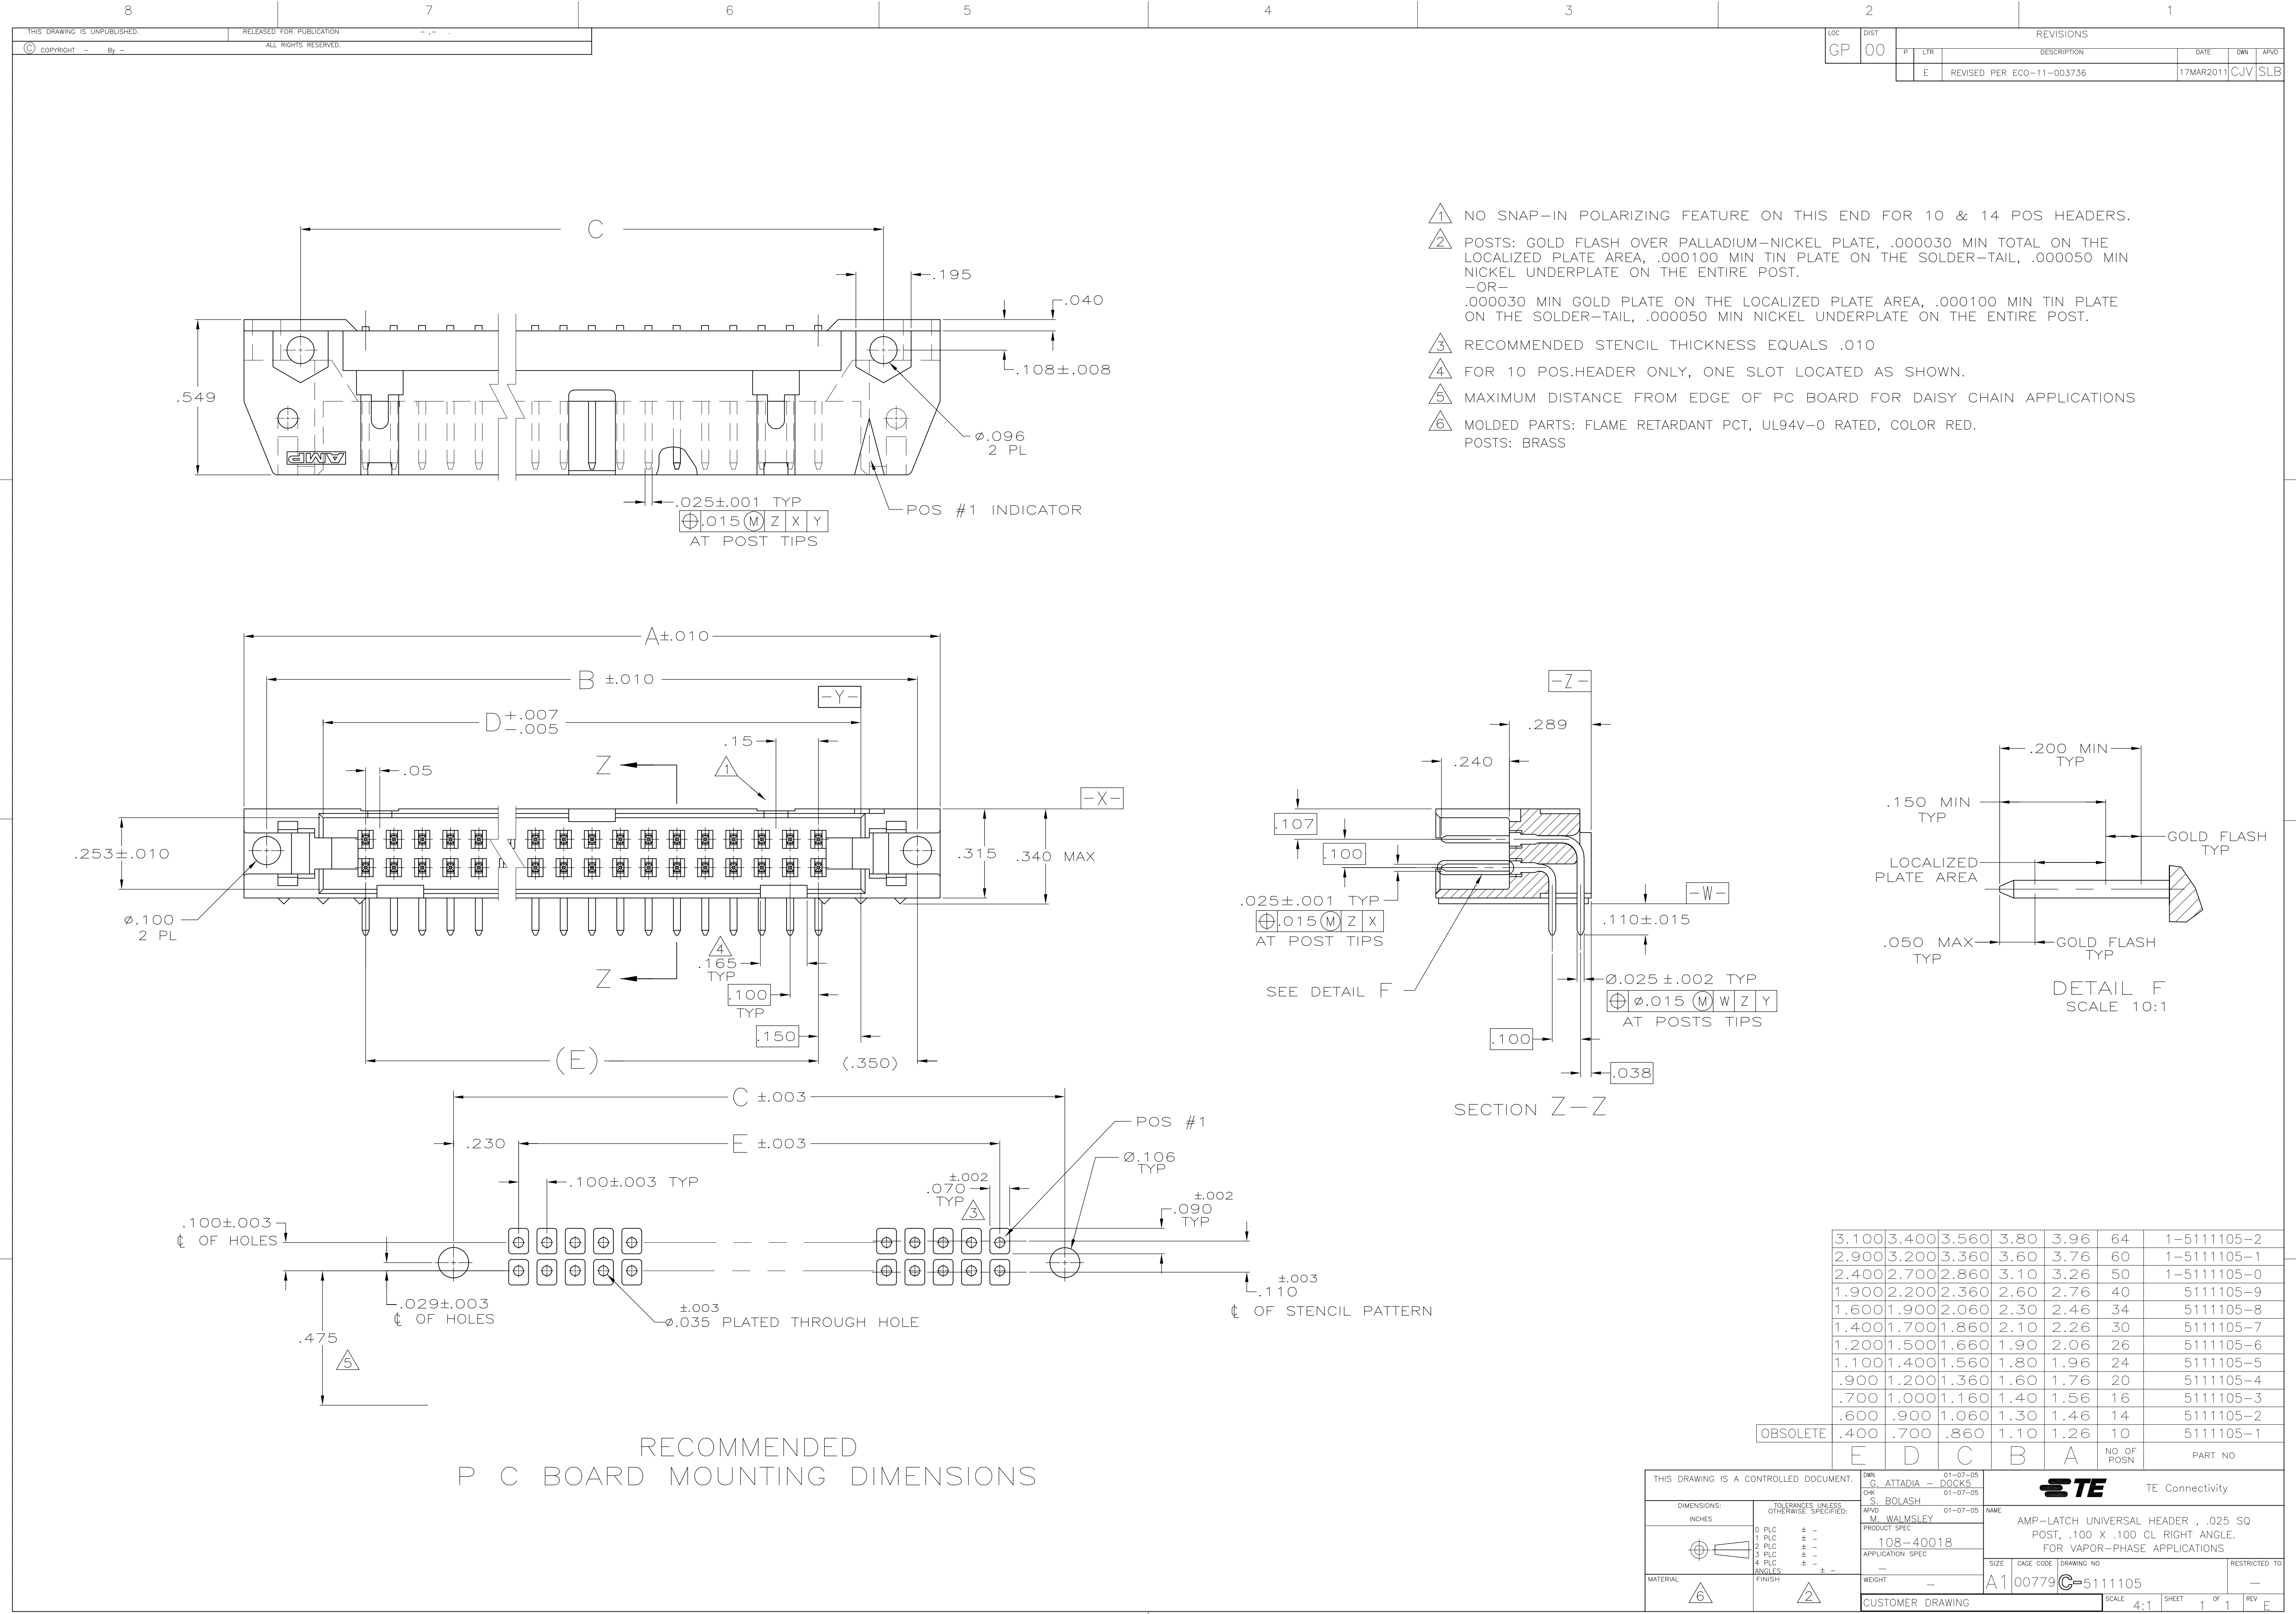

- 1 NO SNAP-IN POLARIZING FEATURE ON THIS END FOR 10 & 14 POS HEADERS.
- 2 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL ON THE LOCALIZED PLATE AREA, .000100 MIN TIN PLATE ON THE SOLDER-TAIL, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
.000030 MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, .000100 MIN TIN PLATE ON THE SOLDER-TAIL, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 3 RECOMMENDED STENCIL THICKNESS EQUALS .010
- 4 FOR 10 POS.HEADER ONLY, ONE SLOT LOCATED AS SHOWN.
- 5 MAXIMUM DISTANCE FROM EDGE OF PC BOARD FOR DAISY CHAIN APPLICATIONS
- 6 MOLDED PARTS: FLAME RETARDANT PCT, UL94V-0 RATED, COLOR RED.
POSTS: BRASS

LOC		DIST		REVISONS			
GP		00		DATE	DWN	APVD	
E				17MAR2011	CJV	SLB	

3.100	3.400	3.560	3.80	3.96	64	1-5111105-2
2.900	3.200	3.360	3.60	3.76	60	1-5111105-1
2.400	2.700	2.860	3.10	3.26	50	1-5111105-0
1.900	2.200	2.360	2.60	2.76	40	5111105-9
1.600	1.900	2.060	2.30	2.46	34	5111105-8
1.400	1.700	1.860	2.10	2.26	30	5111105-7
1.200	1.500	1.660	1.90	2.06	26	5111105-6
1.100	1.400	1.560	1.80	1.96	24	5111105-5
.900	1.200	1.360	1.60	1.76	20	5111105-4
.700	1.000	1.160	1.40	1.56	16	5111105-3
.600	.900	1.060	1.30	1.46	14	5111105-2
.400	.700	.860	1.10	1.26	10	5111105-1
E	D	C	B	A	NO. OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ATTADIA - 01-07-05		TE Connectivity	
DIMENSIONS: INCHES		CHK S. BOLASH 01-07-05		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY 01-07-05		PRODUCT SPEC	
0 PLC ± -		PRODUCT SPEC		AMP-LATCH UNIVERSAL HEADER .025 SQ	
1 PLC ± -		APPLICATION SPEC		POST, .100 X .100 CL RIGHT ANGLE.	
2 PLC ± -		SIZE		FOR VAPOR-PHASE APPLICATIONS	
3 PLC ± -		WEIGHT		RESTRICTED TO	
4 PLC ± -		A1 00779		5111105	
ANGLES ± -		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV E	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5111105-9](#)