


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT BY ALL RIGHTS RESERVED

LOC	DIST	REVISIONS			
		P	LIR	DESCRIPTION	DATE
FB	00		A2	REVISED PER	ECR-16-012124
					07DEC16
					T.Q
					W.H

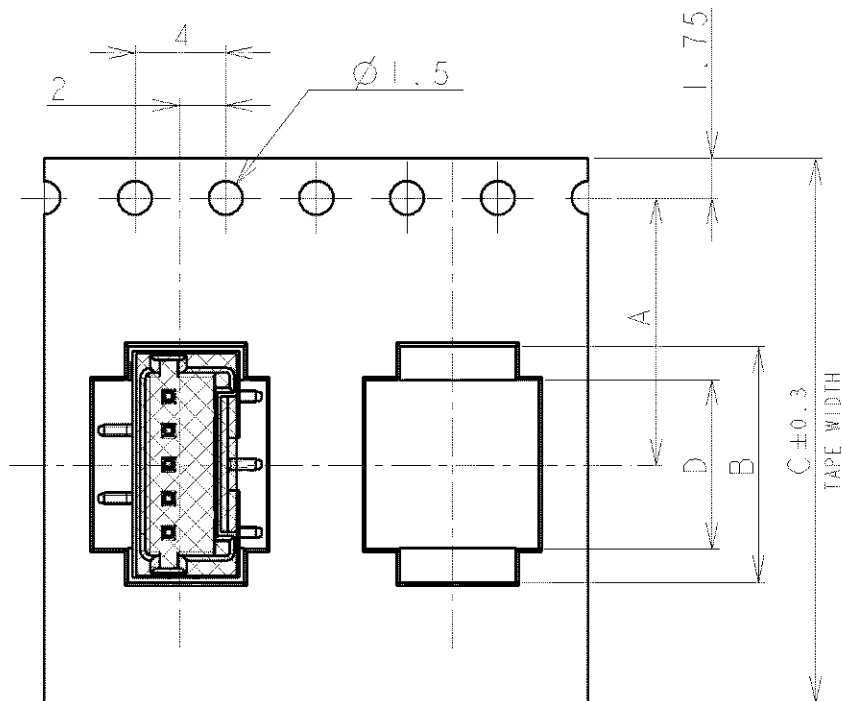

TYPE 1


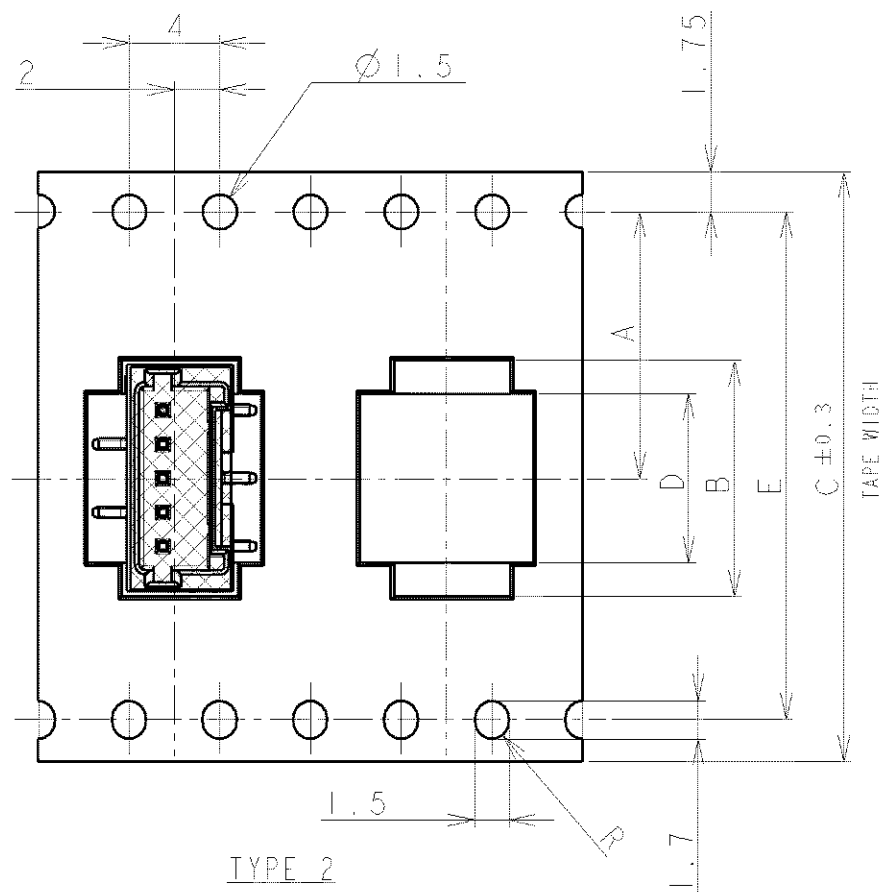



TYPE 2

TOLERANCES UNLESS OTHERWISE SPECIFIED:


10> : ±0.2
30> * >10 : ±0.25
100> * >30 : ±0.3
ANGLE : ±3°

NOTE:
1. PEELING STRENGTH: 0.20-0.69N (20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

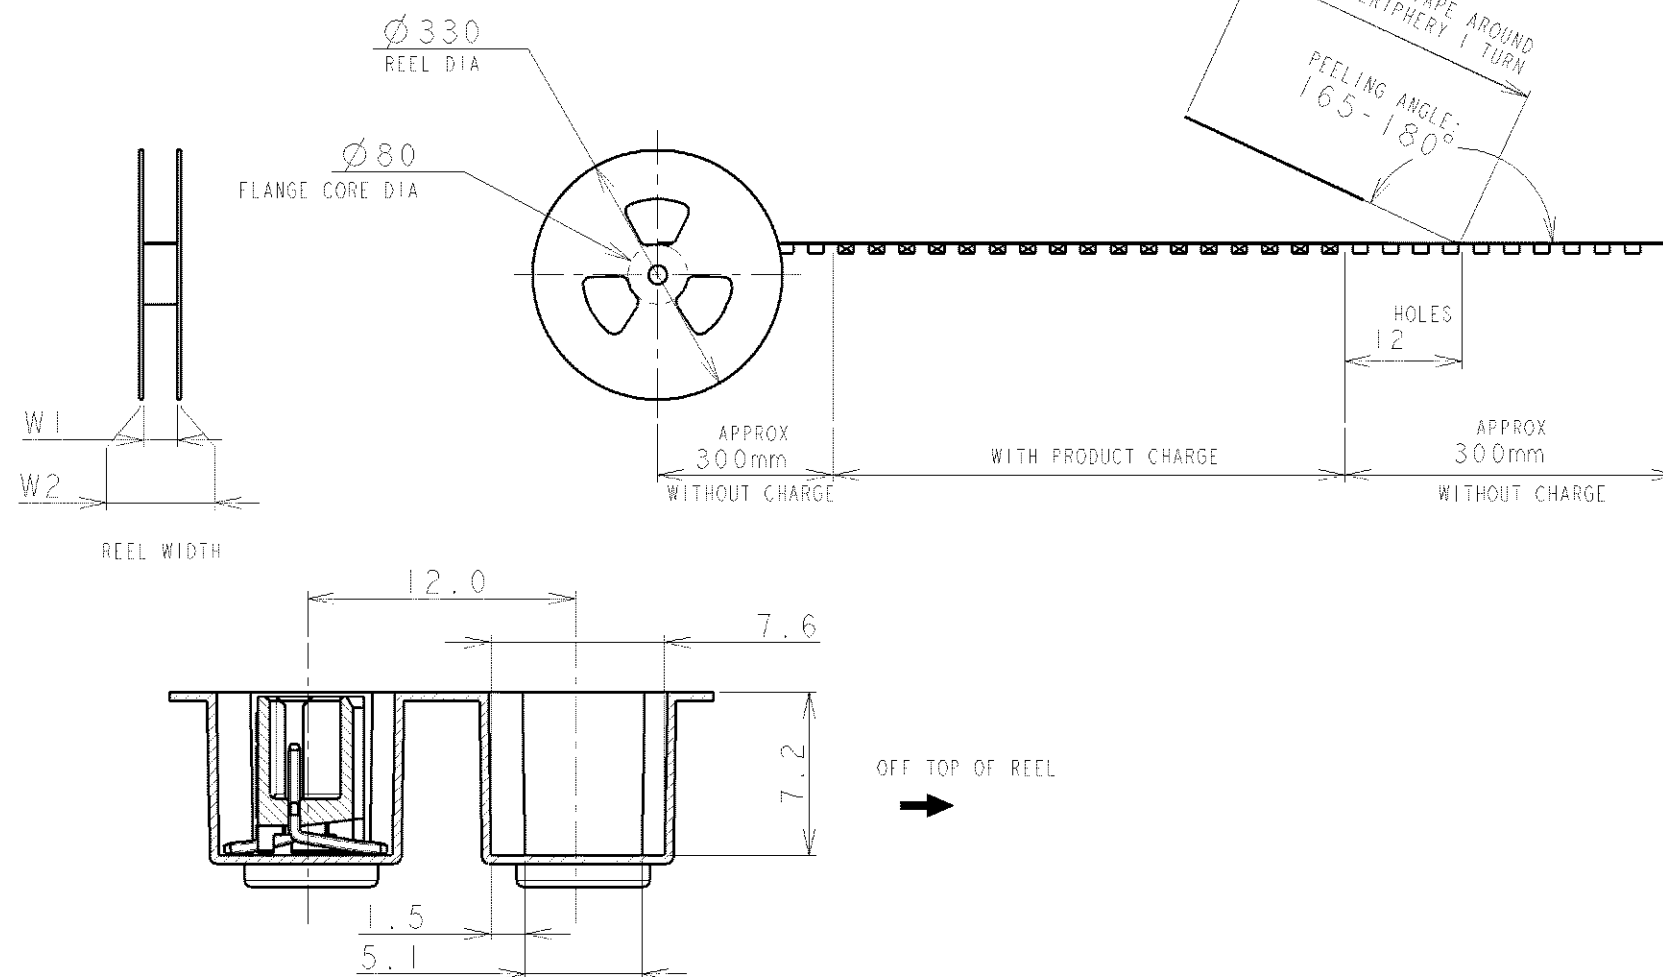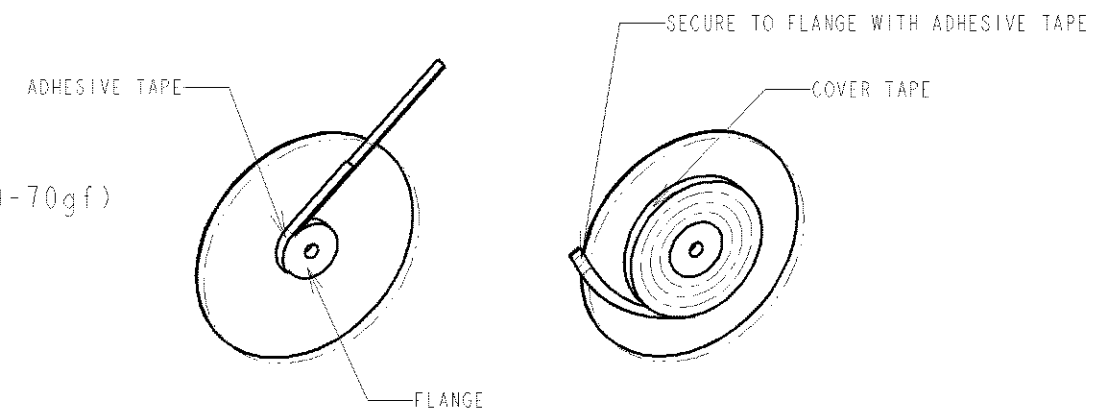

		DWN S.XU	31JAN03			TE Connectivity															
		CHK S.YAO	31JAN03	NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS, POLYIMIDE TAPE, EMBOSS TAPE PACKAGED																	
		APVD T.SASAKI	31JAN03																		
		PRODUCT SPEC 108-60018																			
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: <table><tr><td>0 PLG</td><td>±</td></tr><tr><td>1 PLG</td><td>±</td></tr><tr><td>2 PLG</td><td>±</td></tr><tr><td>3 PLG</td><td>±</td></tr><tr><td>4 PLG</td><td>±</td></tr><tr><td>ANGLES</td><td>±</td></tr></table>		0 PLG	±	1 PLG	±	2 PLG	±	3 PLG	±	4 PLG	±	ANGLES	±	APPLICATION SPEC 114-5223		SIZE A3	CAGE CODE 00779	DRAWING NO C-292232	RESTRICTED TO
				0 PLG	±																
1 PLG	±																				
2 PLG	±																				
3 PLG	±																				
4 PLG	±																				
ANGLES	±																				
MATERIAL -		FINISH -		WEIGHT -		-															
CUSTOMER DRAWING						SCALE NON	SHEET 1	OF 4	REV A2												

LOC	DIST	REVISIONS							
FB	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
				SEE SHEET 1					

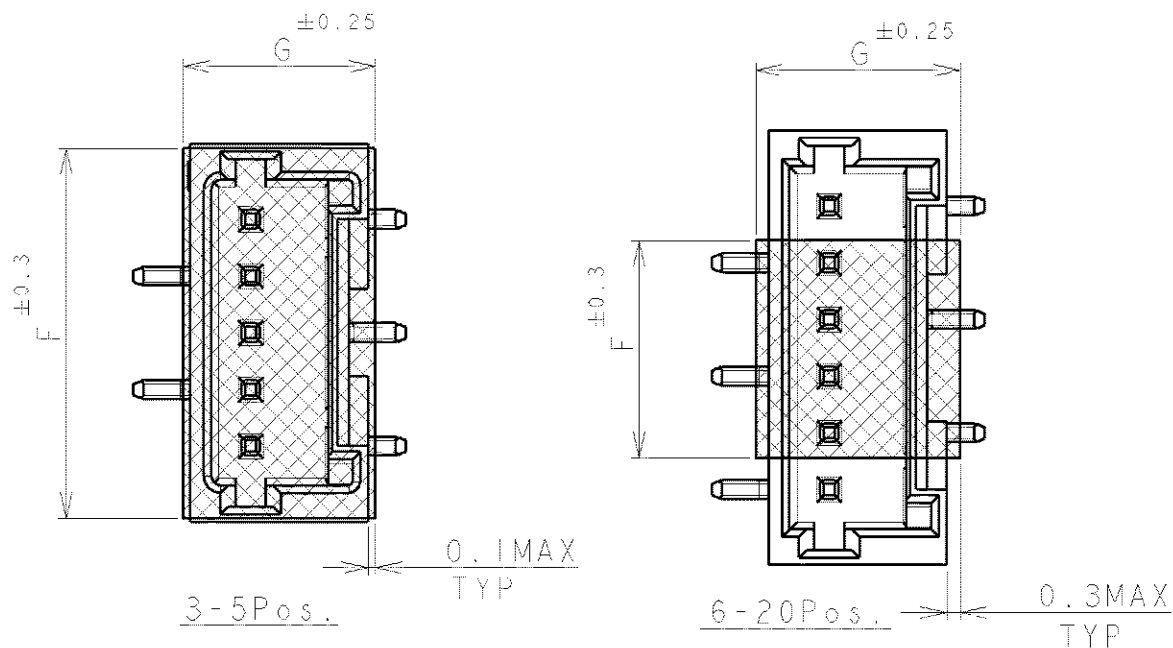

TYPE 2	49.5	45.5	5.0	9.5	40.4	29.9	44	32.9	20.2±0.15	500	20	BEIGE	2-292232-0
	49.5	45.5	5.0	9.5	40.4	28.4	44	31.4		500	19		1-292232-9
	49.5	45.5	5.0	9.5	40.4	26.9	44	29.9		500	18		1-292232-8
	49.5	45.5	5.0	9.5	40.4	25.4	44	28.4		500	17		1-292232-7
	49.5	45.5	5.0	9.5	40.4	23.9	44	26.9		500	16		1-292232-6
	49.5	45.5	5.0	9.5	40.4	22.4	44	25.4		500	15		1-292232-5
	49.5	45.5	5.0	9.5	40.4	20.9	44	23.9		500	14		1-292232-4
	49.5	45.5	5.0	9.5	40.4	19.4	44	22.4		500	13		1-292232-3
	37.5	33.5	5.0	9.5	28.4	17.9	32	20.9	14.2	500	12		1-292232-2
	37.5	33.5	5.0	9.5	28.4	16.4	32	19.4	14.2	500	11		1-292232-1
37.5	33.5	5.0	9.5	28.4	14.9	32	17.9	14.2	500	10	1-292232-0		
37.5	33.5	5.0	6.5	28.4	13.4	32	16.4	14.2	500	9	292232-9		
TYPE 1	29.5	25.5	5.0	6.5	-	11.9	24	14.9	11.5	500	8	292232-8	
	29.5	25.5	5.0	6.5	-	10.4	24	13.4	11.5	500	7	292232-7	
	29.5	25.5	5.0	6.5	-	8.9	24	11.9	11.5	500	6	292232-6	
	29.5	25.5	5.0	9.5	-	7.4	24	10.4	11.5	500	5	292232-5	
	21.5	17.5	5.0	8.0	-	5.9	16	8.9	7.5	500	4	292232-4	
	21.5	17.5	5.0	6.5	-	4.4	16	7.4	7.5	500	3	292232-3	
TAPE TYPE	W2	W1	G	F	E	D	C	B	A	QTY/REEL	POS	COLOR	ON TAPE P/N
DIMENSIONS													

DIMENSIONS: mm	DWN	MATERIAL	FINISH
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	TE TE Connectivity	
0 PLC ±	APVD	NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH	
1 PLC ±	PRODUCT SPEC	SINGLE ROW POST HDR ASS'Y (V) SMT TYPE	
2 PLC ±	SEE SHEET 1	WITH POLYIMIDE TAPE, WITH BOSS, EMOSS TAPE PACKAGED	
3 PLC ±	APPLICATION SPEC	SIZE	RESTRICTED TO
4 PLC ±	SEE SHEET 1	CAGE CODE	
ANGLES ±	WEIGHT	DRAWING NO	
		A4 00779	G-292232
	CUSTOMER DRAWING	SCALE	REV
		NON	A2
		SHEET 2	OF 4

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY

© COPYRIGHT

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FB	00			SEE SHEET 1	-	-	-

0.98	31.5	32.5	30.6	28.5	20	2-292232-0
0.93	30.0	31.0	29.1	27.0	19	1-292232-9
0.89	28.5	29.5	27.6	25.5	18	1-292232-8
0.84	27.0	28.0	26.1	24.0	17	1-292232-7
0.80	25.5	26.5	24.6	22.5	16	1-292232-6
0.75	24.0	25.0	23.1	21.0	15	1-292232-5
0.71	22.5	23.5	21.6	19.5	14	1-292232-4
0.66	21.0	22.0	20.1	18.0	13	1-292232-3
0.62	19.5	20.5	18.6	16.5	12	1-292232-2
0.57	18.0	19.0	17.1	15.0	11	1-292232-1
0.52	16.5	17.5	15.6	13.5	10	1-292232-0
0.48	15.0	16.0	14.1	12.0	9	292232-9
0.43	13.5	14.5	12.6	10.5	8	292232-8
0.39	12.0	13.0	11.1	9.0	7	292232-7
0.34	10.5	11.5	9.6	7.5	6	292232-6
0.30	9.0	10.0	8.1	6.0	5	292232-5
0.25	7.5	8.5	6.6	4.5	4	292232-4
0.20	6.0	7.0	5.1	3.0	3	292232-3
WEIGHT (g)	D	C	B	A	Pos.	BEIGE (NAT)
	DIMENSIONS					P/N

DIMENSIONS: mm		DWN	MATERIAL SEE SHEET 1	FINISH SEE SHEET 1	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	 TE Connectivity		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APVD			
		PRODUCT SPEC	NAME AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5 mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS		
		APPLICATION SPEC	SIZE A4	CAGE CODE 00779	DRAWING NO G-292232
		WEIGHT	RESTRICTED TO		
CUSTOMER DRAWING			SCALE NON	SHEET 4	OF 4
			REV A2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-292232-1](#)