

# Termination resistor - SAC-5P-M12MS CAN TR - 1507816


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Terminating resistor CANopen®/DeviceNet™ M12

RoHS

## Key Commercial Data

Packing unit	5 pc
GTIN	 4 017918 900410
GTIN	4017918900410

## Technical data

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C (Plug)
Degree of protection	IP65
	IP67

### General

Rated current at 40°C	4 A
	45 mA ( $I_{eff}$ )
Rated voltage	48 V AC
	60 V DC
	5 V <sub>rms</sub>
Termination resistor	120 Ω ±1 %
Power consumption	≤ 0.25 W
Number of positions	5
Coding	A - standard
Status display	No
Overvoltage category	II
Degree of pollution	3
Insertion/withdrawal cycles	≥ 100

# Termination resistor - SAC-5P-M12MS CAN TR - 1507816

## Technical data

### Material

Flammability rating according to UL 94	HB
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated

### Standards and Regulations


Flammability rating according to UL 94	HB
--	----

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


## Drawings

Schematic diagram




Pin assignment M12 male connector, 5-pos., A-coded, male side

Dimensional drawing

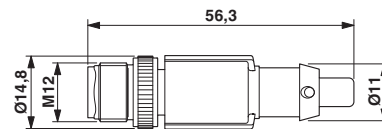


Plug, M12 x 1, straight, shielded

Circuit diagram



Circuit diagram



Contact assignment of the termination resistor; for resistance values, see Internal wiring of connections technical data

## Approvals

Approvals

# Termination resistor - SAC-5P-M12MS CAN TR - 1507816

## Approvals

---

Approvals

EAC / EAC


---

Ex Approvals

---

## Approval details

EAC		RU C- DE.AI30.B.01102
-----	---	--------------------------

EAC		EAC-Zulassung
-----	---	---------------

---

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>