





Complete Insulated Program





Arc Flash Protection:

Wiha Insulated tools can be a vital component in your Arc Flash protection strategy. What is Arc Flash?

ARC FLASH

An Arc Flash is an electrical explosion due to a fault condition or short circuit when either a phase to ground or phase to phase conductor is connected. Arc flashes cause electrical equipment to explode, resulting in an arc-plasma fireball. Temperatures may exceed 35,000° F (the surface of the sun is 9000° F). These high temperatures cause rapid heating of surrounding air and extreme pressures, resulting in an arc blast. The arc blast will likely vaporize all solid copper conductors which will expand up to 67,000 times its original volume when it is vaporized. The result of this violent event is usually destruction of the equipment involved, fire, and severe injury or death to any nearby people.

WHY ARC FLASHES HAPPEN

There are a variety of reasons why an Arc Flash can occur, but most of them are preventable. Most arc flashes occur when maintenance workers are manipulating live equipment for testing or repair and accidentally cause a fault. Improper tools, improper electrical equipment, corrosion of equipment, improper work techniques and lack of training are just some of the events that can lead to a devastating arc flash or arc blast.

ARC FLASH COMPLIANCE

There are 4 main regulations that govern electrical safety & arc flash:

- OSHA Standards 29CFR, Part 1910. Occupational Safety and Health Standards. 1910 sub part S (electrical) Standard number 1910.333 specifically addresses Standards for Work Practices and references NFPA 70E. OSHA 29CFR 1910.335 (a) (1)(i) requires the use of protective equipment when working where a potential electrical hazard exists and 29CFR 1910.132(d)(1) which requires the employer assess the workplace for hazards and the need for personal protective equipment. OSHA compliance is required by any plant building or facility.
- 2. The National Fire Protection Association (NFPA) Standard 70 -2002 "The National Electrical Code" (NEC) contains requirements for warning labels.
- 3. NFPA 70E provides guidance on implementing appropriate work practices that are required to safeguard workers from injury while working on or near exposed electrical conductors or circuit parts that could become energized. Part II 2-1.3.3 regarding Arc Flash Analysis states that a "Flash Hazard Analysis shall be done before a person approaches any exposed electrical conductor or circuit part that has not been placed in an electrical safe work condition". This Arc Flash Hazard Analysis must be done to determine the level of Personal Protection Equipment PPE that a worker must use, and the Arc Flash Boundary in inches along with the incident energy found at each location. Each panel must be marked with an ANSI z535 approved Arc Flash Warning Label.
- 4. The Institute of Electronics and Electrical Engineers (IEEE) 1584 -2002 Guide to Performing Arc-Flash Hazard Calculations

copyright @ information by: American Trainco, Inc. http://www.martinarcflash.com

OSHA

Wiha tools assists with compliance of OSHA 29CFR 1910 (Sub Parts electrical standard)

Wiha Insulated Wrenches					
	Description	Page			
—	Insulated Open End Spanners	4-5			
	Insulated Ratchet Wrenches	5			
I	Ins. Offset Ring Wrenches	6			

Wiha Insulated Adjustable Wrenches **Description Page**

Insulated Adjustable Wrenches 7 8.0. 10.0. 12.0. 15.0"

Wiha Insulated Electrician's Knives

Description Page Insulated Knives

Wiha Insulated L-keys

Description

Insulated L-keys 8

Page

Page

Wiha Insulated 3/8" Hex Drive Bit Sockets **Description**

Ins. Hex Drive Bit Sockets 9

Wiha Insulated Socket Accessories

	Description	Page
- Allerton	Insulated Sockets 1/4, 3/8, 1/2"	9-12
-	Insulated Ratchets	10-13
	Insulated T-handle	10-13
	Insulated Extension Bars	10-13

Wiha Insulated Cable Cutters & Pliers

	Description	Page
	Insulated Cable Cutters	13
095	Insulated WaterPump Pliers	13



W	iha Insulated Hacksaw	
	Description	Page
	Insulated Hacksaw	13
Wiha Insula	ted Pop-Up SlimLine Blad	e Sets
	Description	Page
w/ha C	Insulated Pop-Up Sets	17
Wiha Insu	lated Pico Finish Screwdri	vers
	Description	Page
	Insulated Slotted Drivers	20
	Insulated Phillips Drivers	20
	Insulated PicoFinish Sets	20
Wiha	Insulated SlimLine Tools	
	Description	Page
	Insulated SlimLine Handles	18
	Insulated SlimLine Blade Sets	17-18
For Revision and Control	Insulated SlimLine Blades	19
	Insulated SlimLine Drivers	20
	Insulated SlimLine Driver Sets	21
Wiha Ins	sulated TorqueControl Toc	ols
	Description	Page
	Insulated Torque Ratchet	16
Wiha Ins	ulated Pop-Up Insert Bit S	ets
	Description	Page
- I word -	Insulated Pop-Up Sets	27-28
Wiha I	Insulated Multi-Bit Holders	
	Description	Page
— <u>————————————————————————————————————</u>	Insulated Multi-Bit Drivers	27
Wiha Ins	sulated Belt Pack Pouch S	ets

Description

Pliers & Cutters

Insulated Belt Pack Pouches

Pliers/Cutters & Screwdrivers Pliers/Cutters & Multi Bit Set

Page

28

W	iha Insulated Tools	
	Description	Page
wiha	Xeno Terminal Block Combination Screwdrivers	25
wit Milanut (II)	Insulated TorqueControl Handle & Blade Holder	17
wiha	Voltage Detectors	25
	Insulated Hex Inch/Metric T-handles	15
wiha 🕽	Insulated Slotted Drivers	22-23
who o	Insulated Phillips Drivers	22-23
wiha 🔘	Insulated Torx® Drivers	24
wiha O	Insulated Nut Drivers	26
wiha	Insulated Pozidriv®	25
wiha	Insulated Square Tip	24
	Insulated Tweezers	14

Wiha Insulated 1000Volt Pliers/Cutters					
	Description	Page			
	Insulated Combination Pliers	36			
48	Insulated Heavy Duty Diagonal Cutters	37			
	Insulated Pliers	38			
CDX	Insulated Stripping Pliers	37			
4-1	Insulated Pliers Sets	28-35			

Wiha Insulated Inomic Pliers				
90.	Description	Page		
D	Insulated Inomic Pliers Inomic Combo Pliers	39		
	Inomic Long Nose Pliers			
	Inomic Diagonal Cutters			

Wiha Insulated Industrial Pliers/Cutters				
	Description	Page		
	Insulated Industrial Pliers/Cutters	40-44		



Wiha Insulated Open-End Wrenches **Insulation Test Standards:** Insulation according to ASTM F-1505, EN/IEC 60900, VDE 0680, DIN 7446 and CSA Insulation High visibility, grip is double coated Steel **☆1000V** Forged from chrome vanadium, meets -Each tool individually tested to 10,000 Volts & certified to **DIN 3110** Angled 15° 1000 Volt ac or 1500 Volt dc



\pm 1000Volt

20190 14 Piece Insulated Inch Open

End Wrench Set

Life Wichell Oct						
Item	0	OAL	0	OAL	€	
No.	Inch	Inch	Inch	Inch	lbs.	
20190	5/16	3.9	3/4	7.0	5.70	
	3/8	4.1	13/16	7.5		
	7/16	4.6	7/8	7.6		
	1/2	5.5	15/16	7.9		
	9/16	5.7	1	8.4		
	5/8	6.2	1-1/16	9.2		
	11/16	6.5	1-1/8	9.1		



eq1000Volt

20091 15 Piece Insulated Metric Open **End Wrench Set**

Ena Wichen Oct						
Item	○ MM	OAL	O MM	OAL		
No.	mm	mm	mm	mm	lbs.	
20091	6.0	97	14	150	3.0	
	7.0	98	15	151		
	8.0	104	16	164		
	9.0	108	17	162		
	10.0	107	19	178		
	11.0	118	22	196		
	12.0	129	24	211		
	13.0	137				
	9.0 10.0 11.0 12.0	108 107 118 129	17 19 22	162 178 196		



\pm 1000Volt

20192 8 Piece Insulated Inch Open End

Wrench Set					
Item	0	OAL	0	OAL	<u></u>
No.	Inch	Inch	Inch	Inch	lbs.
20192	5/16	3.9	9/16	5.7	1.59
	3/8	4.1	5/8	6.2	
	7/16	4.6	11/16	6.5	
	1/2	5.5	3/4	7.0	



\pm 1000Volt

20093 8 Piece Insulated Metric Open **End Wrench Set**

Item	○ MM	OAL	O MM	OAL	-
No.	mm	mm	mm	mm	lbs.
20093	6.0	97	13.0	137	1.4
	7.0	98	14.0	150	
	8.0	104	17.0	162	
	10.0	107	19.0	178	



\pm 1000Volt

201 Inch Open-End Wrenches, With Insulated Handle Insulation According to VDE Specification 0680 and EN/IEC 60900, DIN 7446 and CSA, up to 1000 Volt. Individually Tested. Chrome-vanadium steel, hardened. Angled 15°.

Item	O	OAL	OAL	↓	
No.	Inch	Inch	mm	lbs.	pkg.
20131	1/4	3.4	87.5	.04	1
20133	5/16	3.9	100	.05	1
20135	3/8	4.1	105	.09	1
20136	7/16	4.6	117	.09	1
20137	1/2	5.5	140	.15	1
20138	9/16	5.7	146	.15	1
20140	5/8	6.2	158	.20	1
20141	11/16	6.5	165	.23	1
20142	3/4	7.0	178	.33	1
20144	13/16	7.5	191	.42	1
20145	7/8	7.6	192	.44	1
20146	15/16	7.9	201	.51	1
20147	1	8.4	213	.61	1
20148	1-1/16	9.2	233	.79	1
20149	1-1/8	9.2	233	.77	1
20151	1-1/4"	7.5	1		1
20154	1-1/2"	7.5			1

^{*} Lengths are +/- 5% due to coating process



200 Metric Open-End Wrenches,						
With Ins	sulated Ha	andle				
Item	○ MM	OAL	OAL	←		
No.	mm	mm	Inch	lbs.	pkg.	
20006	6.0	97	3.8	.04	1	
20007	7.0	98	3.9	.05	1	
20008	8.0	104	4.1	.07	1	
20009	9.0	108	4.3	.07	1	
20010	10.0	107	4.2	.08	1	
20011	11.0	118	4.6	.11	1	
20012	12.0	129	5.1	.11	1	
20013	13.0	137	5.4	.19	1	
20014	14.0	150	5.9	.19	1	
20015	15.0	151	5.9	.17	1	
20016	16.0	164	6.5	.22	1	
20017	17.0	168	6.4	.24	1	
20018	18.0	173	6.8	.41	1	
20019	19.0	178	7.0	.32	1	
20020	20.0	190	6.9	.36	1	
20022	22.0	196	7.7	.39	1	
20024	24.0	211	8.3	.58	1	
20027	27.0	218	8.6	.68	1	
20030	30.0	235	9.3	.97	1	

32.0

20032

237

9.3

1.01



Wiha Insulated Open-End Wrenches



20194 13 Piece Insulated Inch Open

End wrench Set in 1001 box 11ay						
Item	0	OAL	0	OAL		
No.	Inch	Inch	Inch	Inch	lbs.	
20194	1/4	3.4	11/16	6.5	4.90	
	5/16	3.9	3/4	7.0		
	3/8	4.1	13/16	7.5		
	7/16	4.6	7/8	7.6		
	1/2	5.5	15/16	7.9		
	9/16	5.7	1	8.4		
	5/8	6.2				



20196 13 Pc. Insulated Metric Open

End Wrench Set In Tool Box Tray							
Item	0	OAL	0	OAL			
No.	mm	mm	mm	mm	lbs.		
20196	8.0	104	16.0	164	4.90		
	10.0	107	17.0	168			
	11.0	118	18.0	173			
	12.0	129	19.0	178			
	13.0	137	22.0	196			
	14.0	150	24.0	211			
	15.0	151					

Wiha Insulated Ratchet Wrenches





☆1000Volt

213 Inch Insulated Ratchet Wrenches, With Insulated Handle Insulation According to EN/IEC 60900, ISO 3110 Specification, Up To 1000 Volt. Individually Tested.

Blade chrome-vanadium steel, hardened.

Item	0	OAL	OAL	-		
No.	Inch	mm	Inch	lbs.	pkg.	
21325	3/8	140	5.5	.14	1	
21327	7/16	143	5.6	.15	1	
21329	1/2	154	6.1	.18	1	
21331	9/16	162	6.4	.22	1	
21333	5/8	177	7.0	.30	1	
21335	3/4	209	8.2	.46	1	



☆1000Volt

212 Metric Insulated Ratchet Wrenches, With Insulated Handle Insulation According to EN/IEC 60900, ISO 3110 Specification, Up To 1000 Volt. Individually Tested.

Blade chrome-vanadium steel, hardened.

Item	MM	OAL	OAL	₽	
No.	mm	mm	Inch	lbs.	pkg.
21208	8.0	125	4.9	.08	1
21210	10.0	140	5.5	.12	1
21212	12.0	150	5.9	.18	1
21213	13.0	152	6.0	.18	1
21214	14.0	163	6.4	.22	1
21217	17.0	193	7.6	.38	1
21219	19.0	210	8.3	.45	1



21391 6 Piece Inch Insulated Ratchet Wrenches Set

Item	0	OAL	0	OAL Inch	₽
No.	Inch	Inch	Inch	Inch	lbs.
21391	3/8	5.5	9/16	6.4	1.95
	7/16	5.6	5/8	7.0	
	1/2	6.1	3/4	8.2	



21290 7 Piece Metric Insulated Ratchet Wrenches Set

Item	⊘ MM	OAL	Омм	OAL	
No.	mm	mm	mm	mm	lbs.
21290	8.0	4.9	14.0	6.4	2.10
	10.0	5.5	17.0	7.6	
	12.0	5.9	19.0	8.3	
	13.0	6.0			



Wiha Insulated Deep Offset Ring Wrenches



\pm 1000Volt



21096 8 Piece Inch Insulated Offset

Ring Wrenches Set

Item No.	Inch:	₩.
21096	5/16, 3/8, 7/16, 1/2, 9/16,	lbs.
	5/8, 11/16, 3/4"	3.20



\pm 1000Volt

21094	16 Piece Inch Insulated Offset			
Ring Wrenches Set				
Item No.	Inch:	<u></u>		
21094	1/4, 5/16, 3/8, 7/16, 1/2,	lbs.		
	9/16, 5/8, 11/16, 3/4,	8.70		
	25/32, 13/16, 7/8, 15/16,			
	1, 1-1/16, 1-1/4"			

≙1000Volt

210 Insulated Inch Offset Ring

Wrenches	Blade CV	steel, l	nardened.	
Item	0	↓		
No.	Inch	lbs.	pkg.	
21040	1/4	.16	1	
21042	5/16	.18	1	
21044	3/8	.20	1	
21046	7/16	.22	1	
21048	1/2	.30	1	
21050	9/16	.30	1	
21052	5/8	.34	1	
21054	11/16	.34	1	
21056	3/4	.44	1	
21057	25/32	.58	1	
21058	13/16	.52	1	
21060	7/8	.64	1	
21062	15/16	.90	1	
21064	1.0	.96	1	
21066	1-1/16	1.28	1	
21068	1-1/4	1.38	1	

\pm 1000Volt



21095 8 Piece Metric Insulated Offset

Ring Wrenches Set				
Item No.	Metric:	- →		
21095	10.0, 11.0, 12.0, 13.0,	lbs,		
	14.0, 15.0, 17.0, 19.0mm			



☆1000Volt

21093 16 Piece Metric Insulated Offset
Ring Wrenches Set
Item No. Metric:
21093 8.0, 9.0, 10.0, 11.0, 12.0, 13.0,
14.0, 15.0, 17.0, 19.0, 20.0, 22.0,
Ibs. 8.70 24.0, 27.0, 30.0, 32.0mm



210 Insulated Metric Offset Ring
Wrenches, Insulation According to EN/IEC
60900, ISO 3110 Specification, Up To 1000
Volt. Individually Tested. Blade Chrome-

vanadium s	teei, na	raenea			
Item	○ MM	OAL	OAL	←	
No.	mm	mm	Inch	lbs.	pkg.
21008	8.0	159	6.3	.16	1
21009	9.0	159	6.3	.18	1
21010	10.0	171	6.8	.20	1
21011	11.0	178	7.0	.22	1
21012	12.0	191	7.5	.30	1
21013	13.0	194	7.6	.30	1
21014	14.0	203	8.0	.34	1
21015	15.0	203	8.0	.34	1
21017	17.0	219	8.6	.44	1
21019	19.0	241	9.5	.52	1
21020	20.0	250	9.8	.58	1
21022	22.0	257	10.1	.64	1
21024	24.0	279	11.0	.90	1
21027	27.0	286	11.3	.96	1
21030	30.0	311	12.3	1.28	1

318

12.5 1.38

21032

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation, always wear approved eye protection, Inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to $+70^{\circ}$ C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.







Insulated 8" Adjustable Wrench
Insulation According to ASTM, EN/IEC,
NFPA, CSA and ISO Specification, up to
1000 Volt. Individually Tested. Etched on
scale for pre-setting size. Slip guard handle for
added protection.

Item	OAL	OAL	Capacity	<u></u>		
No.	Inch	mm	Opening	lbs.	pkg.	
76208	8.0	200	1"	.7	1	

☆1000Volt

76210 Insulated 10" Adjustable Wrench

Etched on scale for pre-setting size.

Slip guard handle for added protection.

Item	OAL	OAL	Capacity	•••	
No.	Inch	mm	Opening	lbs.	pkg.
76210	10.0	250	1-1/4"	1.4	1

☆1000Volt

76212 Insulated 12" Adjustable Wrench

Etched on scale for pre-setting size.

Slip guard handle for added protection.

Item	OAL	OAL	Capacity	•	
No.	Inch	mm	Opening	lbs.	pkg.
76212	12.0	300	1-1/2"	1.9	1

\pm 1000Volt

76215 Insulated 15" Adjustable Wrench

Etched on scale for pre-setting size.

Slip guard handle for added protection.

Item	OAL	OAL	Capacity	-	
No.	Inch	mm	Opening	lbs.	pkg.
76215	15.0	380	1-11/16"	2.8	1



76290 3 Pc. Insulated Adjustable

Wrenches Etched on scale for pre-setting size. Slip guard handle for added protection.

Item No. Set includes the following: 76290 8.0", 10.0", 12.0" Adjustable Pliers

Wiha Insulated Electrician's Knives



Each tool individually tested to 10,000 volts & rated to 1000Volt ac or 1500Volt dc



15000 Insulated Electrician's Cable
Stripping Knife, With Insulated Handle,
Insulation According To VDE Specification,
Up To 1000 Volt. Individually Tested.

Blade tool steel, hardened, molded directly on. Cover included.

Item	Blade	OAL	OAL	↓		
No.	mm	mm	Inch	lbs.	pkg.	
15000	50	216	8.5	.30	1	



15050 Insulated Stripping Knife,
With Insulated Handle
Insulation According To VDE
Specification, Up To 1000 Volt.
Individually Tested. Blade tool steel,
hardened. Insulation molded directly on.
Hooked cutting edge, half-round ground.
Cover included.

Item	Blade	OAL	OAL	•••		
No.	mm	mm	Inch	lbs.	pkg.	
15050	35	222	8.75	.22	1	



Insulated Electrician's Cable
Stripping Knife, With Insulated Handle,
Insulation According To VDE Specification,
Up To 1000 Volt. Individually Tested.

Straight, partly insulated, strong blade.
Insulation molded directly on. Cover included.

Item	Blade	OAL	OAL	₽	
No.	mm	mm	Inch	lbs.	pkg.
15003	50	230	9.0	.23	1

WARNING!

Insulated Tools are intended to provide protection against accidental contact with charged energized circuits. For maximum safety we recommend de-energizing all circuits whenever possible before starting work on electrical apparatus or conductors. Always visually inspect insulation on tools before use, do not use tools if insulation shows signs of wear or damage to the insulated areas of the tool. Wear appropriate eye protection when using hand tools. Use NFPA70E certified insulated protective outer wear when appropriate.



Wiha Insulated Hex L-keys



136 Inch Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel, hardened

Stoci, Harc	acrica.				
Item	0	OAL	OAL	•••	
No.	Inch	mm	Inch	lbs.	pkg.
13670	1/16	79	3.1	.05	1
13671	5/64	84	3.3	.05	1
13672	3/32	89	3.5	.05	1
13673	7/64	94	3.7	.06	1
13663	1/8	104	4.1	.06	1
13665	5/32	104	4.1	.06	1
13666	3/16	134	5.3	.10	1
13667	7/32	134	5.3	.12	1
13668	1/4	134	5.3	.16	1
13669	5/16	144	5.7	.24	1
13662	3/8	234	9.2	.51	1
13664	1/2	234	9.2	.77	1











Metric Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium

steel, hardened.						
Item	○ MM	OAL	OAL	•		
No.	mm	mm	Inch	lbs.	pkg.	
13650	1.5	100	3.9	.09	1	
13651	2.0	105	4.1	.09	1	
13652	2.5	115	4.5	.09	1	
13653	3.0	130	5.1	.10	1	
13654	4.0	120	4.7	.10	1	
13655	5.0	140	5.5	.10	1	
13656	6.0	140	5.5	.13	1	
13658	8.0	150	5.9	.24	1	
13659	10.0	220	8.7	.51	1	
13657	12.0	260	10.2	.77	1	



7 Piece Insulated Metric Hex 13691 L-key Set OAL Item **O**MM OAL **O**MM **_** No. mm mm mm mm lbs. 13691 3.0 130 8.0 150 2.07 4.0 120 10.0 220 5.0 140 12.0 260 6.0 140





_								
13693	10 Piece Insulated Metric Hex							
L-key Set								
Item	O MM	OAL	Омм	OAL	₽			
No.	mm	mm	mm	mm	lbs.			
13693	1.5	100	5.0	140	2.26			
	2.0	105	6.0	140				
	2.5	115	8.0	150				
	3.0	130	10.0	220				
	4.0	120	12.0	260				



Wiha Insulated **Hex Bit Sockets**

☆1000Volt

Insulated 3/8" Drive Sockets Chrome-vanadium steel, forged, oil-hardened.

		,	3 , -	
Item		OAL	•	
No.	Inch	Inch	lbs.	pkg.
31805	3/16	3.1"	.13	1
31807	7/32	3.1"	.14	1
31809	1/4	3.1"	.14	1
31811	5/16	3.1"	.16	1
31813	3/8	3.1"	.18	1
31815	7/16	3.1"	.20	1
31817	1/2	3.1"	.22	1

^{*}Sockets must be used with insulated ratchets & extensions



7 Pc. Insulated 3/8" Drive Socket Set - Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31890	3/16, 7/32, 1/4, 5/16, 3/8,
lbs. 1.7	7/16, 1/2"

≙1000Volt



318	Insulated 1/2" Drive Sockets
Chrome-	vanadium steel forged oil-hardened

000		0.00., .0	. 90 -, 0		
Item		OAL	•		
No.	Inch	Inch	lbs.	pkg.	
31830	1/4	2.75	.22	1	
31832	5/16	2.75	.24	1	
31834	3/8	2.75	.25	1	
31836	7/16	3.63	.31	1	
31838	1/2	3.63	.34	1	
31840	9/16	3.63	.36	1	
31842	5/8	3.63	.42	1	
31844	3/4	3.63	.51	1	

^{*}Sockets must be used with insulated ratchets & extensions

Wiha Insulated Socket Adapters / Reducers

\pm 1000Volt







Insulated Socket Adapters / Reducers CV steel, forged, oil-hardened. Item No. Size pkg. 1/4 - 3/8 31350 1 3/8 - 1/2 31450 1 3/8 - 1/4 31460 1 31650 1/2 - 3/8

Wiha Insulated 1/4" Sockets, Accessories & Sets

Metric - \pm 1000Volt 6 Point

313 Insulated 1/4" Drive Sockets-6 Point, Insulation According To ASTM F-1505, DIN 7448 & CSA Specification, Up To 1000 Volt. Individually Tested. Chromevanadium steel, forged, oil-hardened.

Item		•		
No.	Inch	lbs.	pkg.	
31336	3/16	.03	1	
31337	7/32	.03	1	
31338	1/4	.03	1	
31339	9/32	.04	1	
31340	5/16	.04	1	
31341	11/32	.05	1	
31342	3/8	.05	1	
31343	7/16	.06	1	
31344	1/2	.07	1	
31345	9/16	.07	1	

*Sockets must be used with insulated ratchets & extensions

Metric -**☆1000Volt** 6 Point





313 Insulated 1/4" Drive Sockets-6 Point, Insulation According Chrome-vanadium steel, forged, oil-hardened.

Item			_	
No.	mm	lbs.	pkg.	
31326	5.0	.03	1	
31327	6.0	.03	1	
31328	7.0	.03	1	
31329	8.0	.04	1	
31330	9.0	.04	1	
31331	10.0	.05	1	
31332	11.0	.05	1	
31333	12.0	.06	1	
31334	13.0	.06	1	
31335	14.0	.07	1	

*Sockets must be used with insulated ratchets & extensions



31390 13 Pc Insulated 1/4" Drive Socket

Set - Inch CV steel, forged, oil-hardened sockets. Insulated after FN/IFC 60900

SUCKEIS.	insulated after LIVILO 00300.
Item No.	Set includes the following:
31390	3/16, 7/32, 1/4, 9/32, 5/16, 11/32,
₹	3/8, 7/16, 1/2, 9/16"
lbs. 1.39	1/4" x 50mm Extension Bar
	1/4" x 100mm Extension Bar
	1/4" Ratchet - 140mm



31391 13 Pc. Insulated 1/4" Drive Socket Set - Metric CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900. Item No. Set includes the following: 31391 5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm ---1/4" x 50mm Extension Bar 1/4" x 100mm Extension Bar lbs. 1.41 1/4" Ratchet - 140mm

Wiha Insulated 1/4" Sets & Accessories



31394 11 Pc. Insulated 1/4" T-handle & Socket Set-Inch CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900.

Item No.	Set includes the following:
31394	3/16, 7/32, 1/4, 9/32, 5/16, 11/32,
←	3/8, 7/16, 1/2, 9/16"
lbs. 1.40	Insulated 1/4" T-handle

Each tool individually tested to 10,000 volts & certified to 1000Volt ac or 1500Volt dc



31395 11 Piece Insulated 1/4" T-handle & Socket Set - Metric CV steel, forged,

oil-hardened sockets. Insulated after EN/IEC 60900.

LIVILO 003	00.
Item No.	Set includes the following:
31395	5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
lbs. 1.40	Insulated 1/4" T-handle



12851 Insulated 1/4" Drive Ratchet, EN/IEC 60900 & CSA Chrome-Vanadium steel. Thumb lever for rapid reverse.

Item		OAL	OAL	<u></u>	_
No.	Inch	mm	Inch	lbs.	pkg.
12851	1/4"	140	5.5	.28	1



29006 Insulated 1/4" Drive T-handle, With Insulated Handle. Insulation according to EN/IEC 60900 & CSA specification, up to 1000 Volt. Individually Tested. Blade CV steel, hardened.

Item	○ MM	OAL	OAL	↓	
No.	Inch	mm	Inch	lbs.	pkg.
29006	1/4	160	6.2"	.57	1



Insulated 1/4" Extension Bars, ASTM F-1505, EN/IEC 60900 & CSA

Chrome-Vanadium steel.

Item		OAL	OAL	<u></u>	
No.	Inch	mm	Inch	lbs.	pkg.
12854	1/4"	50	2.0	.08	1
12855	1/4"	100	3.9	.12	1

Wiha Insulated 3/8" Sockets



\pm 1000Volt

Insulated 3/8" Drive Sockets Insulation according to EN/IEC 60900, DIN
7448 & CSA specification, up to 1000 Volt.
Individually Tested.

CV steel, forged, oil-hardened.					
Item		•••	_		
No.	Inch	lbs.	pkg.		
31425	1/4	.07	1		
31428	9/32	.07	1		
31429	5/16	.07	1		
31430	11/32	.07	1		
31431	3/8	.08	1		
31432	7/16	.08	1		
31433	1/2	.10	1		
31434	9/16	.10	1		
31435	5/8	.10	1		
31436	11/16	.13	1		
31437	3/4	.14	1		
31438	13/16	.17	1		
31439	7/8	.18	1		

*Sockets must be used with insulated ratchets & extensions



☆1000Volt

Insulated 3/8" Drive SocketsMetric Insulation according to VDE, EN/IEC
60900, DIN 7448 & CSA specification, up
to 1000 Volt. Individually Tested. Chrome-

vanadium steel, forged, oil-hardened. Item No. mm lbs. pkg. 31506 6.0 .07 31507 7.0 .07 31508 8.0 .07 31509 9.0 .07 1 31510 10.0 .07 31511 11.0 .08 31512 12.0 .10 31513 13.0 .10 31514 14.0 .10 31515 15.0 .10 31516 16.0 .10 31517 17.0 1 .11 31518 18.0 .12 31519 19.0 .14 31520 20.0 .15 31521 21.0 .17 1 31522 22.0 .18 31524 24.0 .26

^{*}Sockets must be used with insulated ratchets & extensions



Wiha Insulated 3/8" Sockets & Sets



31493 10 Pc. Insulated 3/8" Drive Socket

Set - Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31493	5/16, 3/8, 7/16, 1/2,
- →	9/16, 5/8, 11/16, 3/4"
lbs. 2.50	3/8" x 125mm Extension Bar
	3/8" Ratchet - 190mm



31590 10 Pc. Insulated 3/8" Drive Socket

Set - Metric CV steel, forged, oil-hardened sockets Insulated to EN/IEC 60900

sockets. Inst	liated to EN/IEC 60900.
Item No.	Set includes the following:
31590	8, 10, 11, 12, 13, 14, 17, 19mm
-	3/8" x 125mm Extension Bar
lbs. 2.50	3/8" Ratchet - 190mm



31491 16 Piece Insulated 3/8" Drive

Socket Set - Inch/Metric CV steel, forged, oil-

hardened sockets. Insulated to EN/IEC 60900.			
Item No.	Set includes the following:		
31491	5/16, 3/8, 7/16, 1/2,		
- →	9/16, 5/8, 11/16, 3/4"		
lbs. 2.01	8, 10, 11, 12, 13, 14, 17, 19mm		



24 Pc. Insulated 3/8" Drive Socket

Set - Inch CV steel, forged, oil-hardened

sockets. Insulated to EN/IEC 60900.			
Item No.	Set includes the following:		
31495	1/4, 9/32, 5/16, 11/32, 3/8, 7/16		
₹	1/2, 9/16, 5/8,11/16, 3/4" Sockets		
lbs.	3/8" x 125mm Extension Bar		
9.07	3/8" x 250mm Extension Bar		
	3/8" Ratchet - 190mm		
	Insulated Electrician's Knife - 50mm		
	Slotted: 3.5, 4.5, 6.5mm		
	Phillips: #1, 2, 3		
	6.3" Long Nose Pliers		
	8.0" Combo Pliers		
	6.3" Diagonal Cutters		

*Sockets must be used with insulated ratchets & extensions



31592 24 Pc. Insulated 3/8" Drive Socket

Set - Metric CV steel forged oil-hardened

Set - Metr	c Cv steel, forged, oil-nardened			
sockets. Insulated to EN/IEC 60900.				
Item No.	Set includes the following:			
31592	6, 7, 8, 9, 10, 11, 12,			
	13, 14, 17, 19mm Sockets			
lbs.	3/8" x 125mm Extension Bar			
9.08	3/8" x 250mm Extension Bar			
	3/8" Ratchet - 190mm			
	Insulated Electrician's Knife - 50mm			
	Slotted: 3.5, 4.5, 6.5mm			
	Phillips: #1, 2, 3			
	6.3" Long Nose Pliers			
	8.0" Combo Pliers			
	6.3" Diagonal Cutters			

^{*}Sockets must be used with insulated ratchets & extensions



Insulated 3/8" Drive Ratchet,

EN/IEC 60900 CV steel. Socket release button. Thumb lever for rapid reverse.

Item		OAL	OAL	<u></u>		
No.	Inch	mm	Inch	lbs.	pkg.	
12852	3/8"	190	7.5	.93	1	



 \pm 1000Volt

31496 10 Pc. Insulated 3/8" T-handle & Socket Set-Inch CV steel, forged, oil-hardened

sockets. Insulated after EN/IEC 60900.			
Item No.	Set includes the following:		
31496	5/16, 3/8, 7/16, 1/2, 9/16, 5/8,		
	11/16, 3/4"		
lbs. 2.47	3/8" x 125mm Extension Bar		
	Insulated 3/8" T-handle		

31595 10 Pc. Insulated 3/8" T-handle &

Socket Set - MM CV steel, forged, oil-hardened sockets, Insulated after EN/IEC 60900.

sockets. Insulated after ENVIEW 00000.			
Item No.	Set includes the following:		
31595	8, 10, 11, 12, 13, 14, 17, 19mm		
€	3/8" x 125mm Extension Bar		
lbs. 2.47	Ins. 3/8" T-handle		

Wiha Insulated 3/8" Socket Accessories



 \pm 1000Volt

Insulated 3/8" Extension Bars, EN/IEC 60900 Chrome-Vanadium steel.

Item		OAL	OAL	•••	
No.	Inch	mm	Inch	lbs.	pkg.
12856	3/8"	125	4.9	.41	1
12857	3/8"	250	9.8	.57	1



1000Volt Insulated 3/8" Drive T-handle Or Breaker Bar. Insulation according to EN/IEC 60900 specification, up to 1000Volt Rated. Individually Tested. Blade chromevanadium steel, hardened.

Item	O MM	OAL	OAL	•	
No.	Inch	mm	Inch	lbs.	pkg.
29009	3/8	200	7.9"	.55	1
12327	3/8	216	8.5"	.68	1



Wiha Insulated 1/2" Sockets & Sets



 \pm 1000Volt

317 Insulated 1/2" Drive Sockets -Insulation According to ASTM, DIN & CSA Specification, Up To 1000Volt. Individually Tested. CV steel, forged, oil-hardened.

. ootou.	O v olool, long	ou, o	
Item		←	
No.	Inch	lbs.	pkg.
31703	5/16	.16	1
31704	11/32	.16	1
31705	3/8	.16	1
31707	7/16	.16	1
31708	1/2	.16	1
31709	9/16	.17	1
31710	5/8	.19	1
31712	11/16	.19	1
31713	3/4	.21	1
31714	13/16	.23	1
31715	7/8	.27	1
31716	15/16	.35	1
31718	1	.33	1
31720	1-1/8	.44	1
31722	1-1/4	.58	1

*Sockets must be used with insulated ratchets & extensions





☆1000Volt

316 Insulated 1/2" Drive Sockets -

Metric	1000 Volt.		
Item		←	
No.	mm	lbs.	pkg.
31608	8.0	.15	1
31609	9.0	.15	1
31610	10.0	.16	1
31611	11.0	.16	1
31612	12.0	.16	1
31613	13.0	.17	1
31614	14.0	.17	1
31615	15.0	.17	1
31616	16.0	.19	1
31617	17.0	.19	1
31618	18.0	.20	1
31619	19.0	.21	1
31620	20.0	.25	1
31621	21.0	.25	1
31622	22.0	.28	1
31623	23.0	.29	1
31624	24.0	.30	1
31626	26.0	.37	1
31627	27.0	.41	1
31628	28.0	.44	1
31630	30.0	.51	1
31632	32.0	.55	1

*Sockets must be used with insulated ratchets & extensions



1000Volt

31790 24 Piece Insulated 1/2" Drive Socket Set - Inch CV steel, forged, oilhardened sockets. Insulated to EN/IEC 60900. Item No. Set includes the following: 31790 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1" Sockets 1/2" x 125mm Extension Bar lbs. 1/2" x 250mm Extension Bar 11.41 1/2" Ratchet - 260mm Ins. Electrician's Knife - 50mm Slotted: 3.5, 4.5, 6.5mm Phillips: #1, 2, 3 6.3" Long Nose Pliers 8.0" Combo Pliers



31792 14 Pc. Insulated 1/2" Drive Socket Set - Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900. Item No. Set includes the following: 31792 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, **-**3/4, 13/16, 7/8, 15/16, 1" lbs. 1/2" x 125mm Extension Bar 7.64 1/2" x 250mm Extension Bar 1/2" Ratchet - 190mm

Each tool individually tested to 10.000 volts & certified to 1000Volt ac or 1500Volt dc

6.3" Diagonal Cutters



\pm 1000Volt

31691 24 Piece Insulated 1/2" Drive Socket Set - Metric CV steel, forged, oilhardened sockets. Insulated to EN/IEC 60900. Item No. Set includes the following: 31691 8, 9, 10, 12, 13, 14, 15, 17, 19, 22, 24mm Sockets 1/2" x 125mm Extension Bar ___ 1/2" x 250mm Extension Bar lbs. 11.39 1/2" Ratchet - 260mm Ins. Electrician's Knife - 50mm Slotted: 3.5, 4.5, 6.5mm Phillips: #1, 2, 3 6.3" Long Nose Pliers 8.0" Combo Pliers 6.3" Diagonal Cutters



 \pm 1000Volt

31694 14 Pc. Insulated 1/2" Drive Socket Set - Metric CV steel, forged, oilhardened sockets. Insulated to EN/IEC 60900. Set includes the following: Item No. 8, 9, 10, 11, 12, 13, 14, 31694 17, 19, 22, 24mm lbs. 1/2" x 125mm Extension Bar 1/2" x 250mm Extension Bar 7.64 1/2" Ratchet - 190mm

> Each tool individually tested to 10.000 volts & certified to 1000Volt ac or 1500Volt dc

Tools that work for you

Wiha Insulated 1/2" Socket accessories



12853 Insulated 1/2" Drive Ratchet, IEC/EN 60900 & CSA

Chrome-Vanadium steel. Reversible.

Item OAL OAL づ 🖚 No. Inch lbs. pkg. Inch mm 12853



10.2 1.55 1

\pm 1000Volt

128 Insulated 1/2" Extension Bars,

EN/IEC 60900 & CSA

1/2" 260

Chrome-vanadium steel.

Item		OAL	OAL	•••		
No.	Inch	mm	Inch	lbs.	pkg.	
12858	1/2"	125	4.9	.45	1	
12859	1/2"	250	9.8	.91	1	



Insulated 1/2" Drive T-handle, 29012 With Insulated Handle. Insulation according to EN/IEC 60900 & CSA Specification, Up To 1000 Volt. Individually Tested Blade VC steel, hardened.

Item	○ MM	OAL	OAL	←	_
No.	Inch	mm	Inch	lbs.	pkg.
29012	1/2	200	7.9"	.68	1



Wiha Insulated Hacksaw



Uses standard 12" blade

457mm 18.0"

${f extstyle 2}$ 1000Volt

19767

19767 Hacksaw, With Insulated Handle Insulation According to EN/IEC 60900, DIN ISO, ASTM & CSA Specification, Up To 1000 Volt. Individually Tested. OAL OAL +--Item No. mm Inch lbs. pkg.

1.92

1

Insulated Cable Cutters



11950 Cable Cutter, With Insulated Handle. Insulation According to EN/IEC, ASTM & CSA Specification, Up To 1000 Volt. Individually Tested. Blade alloyed tool steel. Induction hardened.

Item	OAL	OAL	Capa	acity	•••	
No.	mm	Inch	mm	Inch	lbs.	pkg.
11950	500	19.6	12	1/2"	3.0	1

Insulated Waterpump Pliers




 \pm 1000Volt

29240 Waterpump Pliers, With Insulated Handle. Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification, Up To 1000 Volt. Individually Tested Box joint. Chromevanadium steel, drop forged, oil hardened.

Item	OAL	OAL	Capacity	₽	
No.	mm	Inch	mm	lbs.	pkg.
29240	240	9.5	7/8"	1.1	1

For cutting multi strand aluminum & copper cables



\pm 1000Volt

40800 Large Capacity Cable Cutter, With Insulated Handle Insulation According to EN/IEC 60900, ASTM F-1505 & CSA Specification, Up to 1000 Volt. Individually Tested. Easy cutting blades, dropped forged, oil hardened. Cuts cable diameters up to 50mm. Not to be used on steel rods.

Item	OAL	OAL	Cap	acity	•	
No.	mm	Inch	mm	Inch	lbs.	pkg.
40800	800	31.5	50	2"	8.0	1

For cutting solid aluminum, copper & medium hard wires



\pm 1000Volt

29250 End Cutters, With Insulated Handle. Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification. Individually Tested. Blade alloyed tool steel. Induction hardened.

Item	OAL	OAL	Capacity	•	
No.	mm	Inch	mm	lbs.	pkg.
29250	250	10	7/8"	1.1	1

Wiha Insulated Ratcheting Cable Cutters

Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc



119 High Voltage Double-Insulated

Ratcheting Cable Cutters High leverage ratchet cable cutter with shear type blades cuts stranded and flexible copper and aluminum cable. Not for use on steel. Features built in safety release in all cutting positions, and high-visibility comfort grip handles.

Item	OAL	OAL	up to	Inch		-
No.	mm	Inch	MCM	Dia.	Cap.	lbs.
11960	250	10.0"	500	1.25"	32ml	1.6
11975	280	11.0"	750	2.0"	52ml	2.0




☆1000Volt

11980 Insulated ACSR Ratcheting

Cable Cutter Replaceable tool steel cutting blades are securely mounted for accurate cutting. Handles lock in closed position for easier storage. High leverage ratchet mechanism for best cutting performance.

Item	OAL	OAL	up to	Inch		_
No.	mm	Inch	MCM	Dia.	Сар.	lbs.
11980	353	13.9	477	1.25"	32ml	3.42

Wiha Insulated Serrated Tweezers

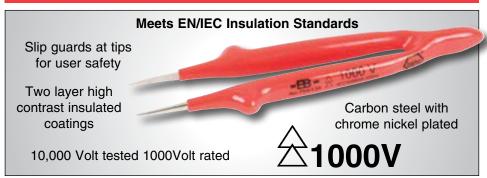



\pm 1000Volt

75205 Insulated Serrated Straight
Fine Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item	OAL	OAL	<u></u>	_
No.	mm	Inch	lbs.	pkg.
75205	130	5.0	.06	1



\pm 1000Volt

75220 Insulated Serrated Straight
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item	OAL	OAL	<u></u>	
No.	mm	Inch	lbs.	pkg.
75220	200	8.0	.18	1



\pm 1000Volt

75210 Insulated Serrated Straight
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item	OAL	OAL	←	
No.	mm	Inch	lbs.	pkg.
75210	130	5.0	.08	1



\pm 1000Volt

75302 Insulated Serrated Angled
Fine Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item	OAL	OAL	•••	
No.	mm	Inch	lbs.	pkg.
75302	145	6.0	.08	1



$ot \simeq$ 1000Volt

75215 Insulated Serrated Straight
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item	OAL	OAL	←	
No.	mm	Inch	lbs.	pkg.
75215	145	6.0	.10	1



75304 Insulated Serrated Angled
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item	OAL	OAL	←	_
No.	mm	Inch	lbs.	pkg.
75304	200	8.0	.16	1





☆1000Volt

Inch T-handle, With Wiha-Molded Handle. Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

	,				-,			
Item	•	—		=	•••			
No.	Inch	Inch	Inch	mm	lbs.	pkg.		
33481	5/32	5.9	6.9	176	.09	10		
33482	3/16	5.9	6.9	176	.15	10		
33483	7/32	5.9	6.9	176	.19	10		
33485	1/4	5.9	7.1	176	.20	10		
33486	5/16	5.9	7.1	176	.26	10		
33487	3/8	5.9	7.1	176	.44	10		

★ 21000Volt

Metric T-handle, With Wiha-Molded Handle. Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item			—	<u></u>	_	•••			
No.	mm	mm	Inch	mm	Inch	lbs.	pkg.		
33441	4.0	150	5.9	176	6.9	.09	10		
33443	5.0	150	5.9	182	7.1	.15	10		
33445	6.0	150	5.9	182	7.1	.18	10		
33447	8.0	150	5.9	182	7.1	.26	10		
33449	10.0	150	5.9	191	7.5	.46	10		
•									



★ 1000Volt						
33490	6 Piece Inch T-han	dle Hex Set				
Item	Inch:					
No.	5/32, 3/16, 7/32,	lbs.				
33490	1/4, 5/16, 3/8"	1.66				

33478 5 Piece Metric T-handle Hex Set Item Metric:

4.0, 5.0, 6.0,

8.0, 10.0mm


lbs.

1.20

No.

33478

Wiha Insulated T-handle Metric Nut Drivers



Metric T-handle Nut Drivers, With Wiha-Molded Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA,

up to 1000Volt. Individually Tested. Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item	0		_	_	·	↓	
No.	mm	mm				lbs.	
33632	8.0	200	7.9	232	9.1	.15	5
33634	10.0	230	9.0	262	10.3	.18	5
33637	13.0	230	9.0	262	10.3	.26	5
33641	17.0	230	9.0	268	10.6	.46	5

Wiha Insulated Torque **Ratchet Wrenches**





Insulated Torque Ratchet Wrenches, 1/4, 3/8, 1/2" Drives Insulated to EN/IEC 60900:2004, ASTM F1505, CSA Standards Visible reading scale for easy reading and adjustment. Locking endcap Torque adjuster for easy adjustment. Accuracy +/- 10%. Dual scale reading Ft. lbs. / Nm.

Item		OAL	OAL		<u></u>	
No.	Inch	mm	Inch	Nm	lbs.	pkg.
30114	1/4"	210	8.25	5-25	1.02	1
30138	3/8"	370	14.5	5-50	2.72	1
30152	1/2"	530	21.0	40-220	3.64	1

Wiha Insulated TorqueControl & SlimLine Tool Sets



28792 16 Piece Insulated

TorqueControl Set With SlimLine Blades Certified to EN ISO 6798. BS EN 26789. ASME B107.14M. Set includes Insulated multicomponent adjustable TorqueVario-S handle, 13 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.

SlimLine Slotted: 4.0, 5.5, 6.5mm 28792 SlimLine Phillips: #1, 2 SlimLine Terminal Xeno: #1, 2 **SlimLine TORX***: T8, T10, T15, T20 SlimLine Square: #1, 2 28727 - Handle Range 18-62 Inch/lbs. SlimLine Blade Holder ₩ lbs. 1.27

With Certificate of Calibration

Wiha Insulated Torque Ratchet Wrench Sets



30190 16 Pc. Insulated 3/8" Drive Ratcheting Torque Wrench & Socket Set -Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Inch 3/8" Drive Sockets:
30190	1/4, 9/32, 5/16, 11/32, 3/8, 7/16
←	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"
lbs.	3/8" x 125mm Extension Bar
8.80	3/8" x 250mm Extension Bar
	3/8" Drive Ratcheting Torque
	Wrench - 5-50 Nm

*Sockets must be used with insulated ratchets & extensions



pprox1000Volt

30192 16 Pc. Insulated 3/8" Drive Ratcheting Torque Wrench & Socket Set -Metric CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900. Item No. Metric 3/8" Drive Sockets: 30192 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20mm ___ lbs. 3/8" x 125mm Extension Bar 8.80 3/8" x 250mm Extension Bar 3/8" Drive Ratcheting Torque Wrench - 5-50 Nm

*Sockets must be used with insulated ratchets & extensions



Certified to EN ISO 6798, BS EN 26789, ASME B107.14M Specifications



28791 8 Piece Insulated TorqueControl Set With Slotted & Phillips SlimLine Blades

Set includes Insulated multi-component adjustable TorqueVario-S handle, 5 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No. Slotted: 3.0, 4.0, 5.5mm

Phillips: #1, 2 28791

28726-Handle Range 10-50 Inch/lbs.

● Ibs. .87

Wiha Insulated TorqueControl Tools



- Includes Certificate
- Includes SlimLine blade holder #28350
- Requires SlimLine Blades





Insulated TorqueVario-S, With EN/IEC, EN ISO, BS EN, ASME & CSA, +/- 6% Accuracy. Ergonomic multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained. In Plastic Tube Holder

ltem	Rang	je		=	←	
No.	Inch	lbs.	Increments	mm	lbs.	pkg.
28750	5 -	18	.5 In/lbs	126-131	.56	1
28751	10 -	50	2 In/lbs	133-138	.74	1
28752	18 -	62	2 In/lbs	137-142	.84	1

Insulated TorqueVario-S Handle - In Newton Meter Scale

			004.0		
Item	Range	=	•		
No.	Nm	mm	lbs.	pkg.	
28740	0.5 - 2.0	131	.64	1	
28741	1.0 - 5.0	138	.56	1	
28742	2.0 - 7.0	142	.84	1	

Each TorqueVario handle has unique serial number & certificate of calibration



Wiha Insulated TorqueControl Tools

Includes Certificate



☆1000Volt

*Requires SlimLine blade holder #28350

287 Insulated TorqueVario-S, With Window Scale Insulation $\stackrel{}{\sim}$ up to 1000Volt. EN/IEC 60900 EN ISO 6798, BS EN 26789, ASME B107.14M &CSA, +/- 6% Accuracy. Ergonomic multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained.

Item	Range		=	•••	
No.	Inch lbs.	Increments	mm	lbs.	pkg.
28724	5 - 18	.5 In/lbs	126-131	.43	1
28726	10 - 50	2 In/lbs	133-138	.40	1
28727	18 - 62	2 In/lbs	137-142	.69	1

Insulated TorqueVario-S Handle -

In Newton Meter Scale

Item	Range	=	•		
No.	Nm	mm	lbs.	pkg.	
28734	0.5 - 2.0	131	.45	1	
28736	1.0 - 5.0	138	.45	1	
28738	2.0 - 7.0	142	.72	1	

Each TorqueVario handle has unique serial number & certificate of calibration

∕∼1000Volt

28350 Insulated SlimLine Torque

Blade Holder Chrome-vanadium-molybdenum steel. Through hardened black finish. ClicFix quick release holder securely locks bits.

Item		OAL	OAL	~ →	
No.	mm	mm	Inch	lbs.	pkg.
28350	6.0	170	6.75	.06	1



≙1000Volt

283 Insulated Easy-TorqueControl

Adapters Ideal for torque sensitive terminations. For use with SlimLine blades.

Repeatab	le acc	uracy	to +/-	10%			
Item			OAL	OAL	•••		
No.	Nm	In/lbs	mm	Inch	lbs.	pkg.	
28366	8.0	7.0	60	2.38	.13	1	
28367	2.0	17.7	60	2.38	.13	1	
28368	2.5	23.1	60	2.38	.13	1	
28369	2.8	24.7	60	2.38	.13	1	
28371	4.0	35.4	60	2.38	.13	1	

Wiha Cushion Grip Stubby SlimLine Blade Holder & Set



 \cong 1000Volt

28302 SlimLine Stubby Blade Holder, With Wiha-SoftFinish® Handle. Insulation According to VDE, ASTM, EN/IEC, NFPA70E & CSA, A up to 1000 Volt. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item	0	==	==	•••		
No.	Size	mm	Inch	lbs.	pkg.	
28302	1/4"	57	2.2	.11	1	

\pm 1000Volt





20 Piece Insulated SlimLine Blade Set High quality CV steel, through hardened. Friction hold, stubby cushion grip handle. In zipper case.

Item No.

28396	Slotted: 3.0, 3.5, 4.0, 5.5mm
↓	Phillips: #1, #2
lbs.	Xeno SL/PH: #1, #2
.85	Xeno SL/PZ: #1, #2
	TORX*: T8, T10, T15, T20
	Square: #1, #2
	Hex Metric: 3.0, 4.0, 5.0mm
	SlimLine Stubby Blade Holder

Wiha Insulated Pop-Up SlimLine Sets



☆1000Volt Rated 10,000 Volt Tested

₩ lbs. .38

Certified to VDE, EN ISO, BS EN, ASME specifications



28393 Insulated Pop-Up "Apprentice" Blade Holder Set With SlimLine Blades

Insulated cushion grip multi-component handle. Friction hold bit holder holds SlimLine Blades securely. Convenient rotating cap.

28393 Set includes the following blades:

\$ Slotted: 3.0, 4.0, 5.5, 6.5mm **Phillips:** #1, #2



28394 Insulated Pop-Up "Residental" Blade Holder Set With SlimLine Blades

28394 Set includes the following blades:

\$ Slotted: 3.0, 4.0mm **Phillips:** #1, #2 O Square: #1, #2 **J** lbs. .38



Holder Set With SlimLine Blades

28395 Set includes the following blades:

\$ 10 Slotted: 3.0, 4.0mm **Phillips:** #1, #2

⊕ Terminal Xeno: #1, #2

- lbs. .38



Each SlimLine bit can be taken in and out of the holder easily and conveniently



Wiha Insulated SlimLine Blade Sets



21000Volt



 \pm 1000Volt

8 Piece Insulated SlimLine Blade

Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely. Up to 33% narrower insulation diameter then standard insulated tools.

In roll up pouch

Item No.	Slotted: 4.0, 6.5
28391	Phillips: #1, #2
 -	Xeno SL/PH: #2
lbs45	TORX®: T15, T20
	28301 - SlimLine Blade Holder

28392 12 Piece Insulated SlimLine

Blade Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. In roll up pouch

Item No.	Slotted: 3.0, 5.5mm
28392	Phillips: #2
	Xeno SL/PH: #1, #2
lbs.	Square: #1, #2
.52	TORX *: T8, T10, T15, T20
	28301 - SlimLine Blade Holder



30 Piece Insulated SlimLine Blade

Set High quality CV steel, through hardened. Friction hold blade holder, holds blades

 \pm 1000Volt

securely. In belt wallet storage pouch.								
Item No.	Slotted: 2.5, 3.0, 3.5, 4.0, 5.5, 6.5mm							
28399	Phillips: #1, #2							
↓	Pozidriv®: #1, #2							
lbs.	Xeno SL/PH: #1, #2							
1.20	Xeno SL/PZ: #1, #2							
	TORX *: T8, T9, T10, T15, T20, T25							
	Square: #1, #2							
Hex Metric: 1.5, 2.0, 2.5, 3.0,								
4.0, 5.0, 6.0mm								
	28301 - SlimLine Blade Holder							

15 Piece Insulated SlimLine

Blade Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely. Up to 33% narrower insulation diameter then standard insulated tools. In roll up pouch

Item No.	Slotted: 3.0, 4.0, 5.5, 6.5
28390	Phillips: #1, #2
₹	Xeno SL/PH: #1, #2
lbs.	TORX *: T8, T10, T15, T20
.56	Square: #1, #2
	28301 - SlimLine Blade Holder

Wiha Cushion Grip SlimLine Blade Holder



\triangle 1000Volt

28301 SlimLine Blade Holder, With Wiha-SoftFinish® Handle Insulation According to VDE, ASTM F-1505 and EN/ IEC 60900, NFPA70E & CSA, up to 1000 Volt. Chrome-vanadium steel, through-

hardened. Insulation molded directly onto blade. Friction hold blade holder, holds blades securely. Wiha-SoftFinish® handle,

multi-component, cushion grip.

Item	0	=	==	==	==	-
No.	Size	mm	Inch	mm	Inch	lbs.
28301	1/4"	50	2.0	160	6.3	.15

33% Narrower Insulation Diameter

Slim Diameter





riangle1000Volt

28304 SlimLine Blade Holder, With Wiha-SoftFinish® Handle. Insulation According to VDE, ASTM, EN/IEC, NFPA70E handle, multi-component, cushion grip.

Item	\circ	==	===	-	
No.	Size	mm	Inch	lbs.	pkg.
28304	1/4"	114	4.5	.21	1





28398 19 Piece Insulated SlimLine

Blade Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely. In zipper case


	,
Item No.	
28398	Slotted: 3.0, 4.0, 5.5mm
	Phillips: #1, #2
lbs.	Xeno SL/PH: #1, #2
.64	Xeno SL/PZ: #1, 2
	TORX*: T8, T10, T15, T20
	Square: #1, 2
	Hex Metric: 3.0, 4.0, 5.0mm
	28301 - SlimLine Blade Holder



☆1000Volt

28302 SlimLine Stubby Blade Holder, With Wiha-SoftFinish® Handle. Insulation According to VDE, ASTM, EN/IEC, NFPA70E & CSA, \Leftrightarrow up to 1000 Volt. Wiha-SoftFinish® handle, multi-component, cushion grip.

,			,		9
Item	0	==	==	↓	_
No.	Size	mm	Inch	lbs.	pkg.
28302	1/4"	57	2.2	.11	1

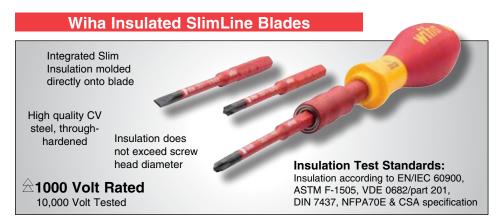

Wiha SlimTECHNOLOGY

Achieves blade diameters up to 33% narrower utilizing integrated insulation



0

283 Insulated Slotted SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item	0	0	Slim	Max	Inch/	·	
No.	mm	Inch	Dia.	Nm	lbs.	lbs.	Pkg.
28307	2.5	3/32	4.0	0.4	3.5	.02	1
28308	3.0	1/8	4.0	0.6	5.3	.02	1
28310	3.5	9/64	4.0	2.5	22.1	.02	1
28309	4.0	5/32	4.0	2.5	22.1	.02	1
28312	5.5	7/32	6.0	3.8	33.6	.02	1
28315	6.5	1/4	6.0	5.5	48.6	.02	1



283 Insulated Xeno Slotted/Pozidriv®

SlimLine Blades Up to 33% narrower insulation diameter then standard insulated tools.

Item	*	Slim	Max	Inch/	<u>-</u>	
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28320	1	4.0	3.8	33.6	.02	1
28321	2	6.0	5.5	48.7	.02	1



283 Insulated Square SlimLine Blades

Up to 33% narrower insulation diameter then standard insulated tools.

Item	0	Slim	Max	Inch/	
No.	Size	Dia.	Nm	lbs.	lbs. Pkg.
28346	1	4.0	3.8	33.6	.02 1
28347	2	6.0	5.5	48.7	.02 1

283 Insulated Phillips SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item	•	Slim	Max	Inch/		_
No.	Size	Dia.	Nm	lbs.	lbs. F	²kg.
28317	1	4.0	3.8	33.7	.02	1
28319	2	6.0	5.5	48.8	.02	1



Insulated Xeno Slotted/Phillips

SlimLine Blades Up to 33% narrower insulation diameter then standard insulated tools.

Item	\oplus	Slim	Max	Inch/	←	
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28327	1	4.0	3.8	33.6	.02	1
28329	2	6.0	5.5	48.7	.02	1



283 Insulated Hex Metric SlimLine

A Slim May Inch/

Blades Up to 33% narrower insulation diameter then standard insulated tools.

пеш		SIIIII	IVIAX	IIICII/	• •	
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28332	1.5	4.0	0.9	7.9	.02	1
28333	2.0	4.0	1.8	15.9	.02	1
28334	2.5	4.0	3.8	33.6	.02	1
28335	3.0	4.0	5.5	48.7	.02	1
28336	4.0	6.0	5.5	48.7	.02	1
28337	5.0	6.0	5.5	48.7	.02	1
28338	6.0	6.0	5.5	48.7	.02	1



283 Insulated Pozidriv® SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item	0	Slim	Max	Inch/	
No.	Size	Dia.	Nm	lbs.	lbs. Pkg.
28330	1	4.0	3.8	33.7	.02 1
28331	2	6.0	5.5	48.8	.02 1



283 Insulated TORX®SlimLine Blades

Up to 33% narrower insulation diameter then standard insulated tools.

Item	0	Slim	Max	Inch/	_	
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28339	T8	4.0	1.3	11.5	.02	1
28344	T9	4.0	1.3	11.5	.02	1
28340	T10	4.0	3.8	33.6	.02	1
28341	T15	6.0	5.5	48.7	.02	1
28342	T20	6.0	5.5	48.7	.02	1
28343	T25	6.0	5.5	48.7	.02	1



Insulated PicoFinish Precision Screwdrivers



Insulated Slotted PicoFinish
Screwdrivers. Individually Tested Protective
Insulation 1000Volt AC, VDE & GS Tested.

Item	0	0	==	==	-	
No.	mm	Inch	mm	mm	lbs.	pkg.
32000	1.5	.06	40	154	.05	1
32001	2.0	.08	40	154	.07	1
32002	2.5	.10	60	160	.07	1
32003	3.0	.12	60	160	.08	1
32004	3.5	.14	60	160	.08	1



321 Insulated Phillips PicoFinish
Screwdrivers. Individually Tested Protective
Insulation 1000Volt AC, VDE & GS Tested.

Item	•	•		•••	
No.	Size	mm	mm	lbs.	pkg.
32106	00	40	154	.05	1
32107	0	60	160	.07	1
32108	1	60	160	.08	1



32088 8 Piece Slotted & Phillips

PicoFinish Set High quality CV steel, through hardened, black finish ltem No. Slotted: 1.5, 2.0, 2.5, 3.0, 3.5 lbs. 32088 Phillips: #00, #0, #1

Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested



Rotating cap for precise turning and control with fingertip

32085 5 Piece Slotted & Phillips

PicoFinish Set High quality CV steel, through hardened, black finish

Item No.	Slotted: 1.5, 2.5, 3.5	₩ Ibs.
32085	Phillips: #0, #1	.26

Wiha Insulated SlimLine Screwdrivers





Wiha SlimTECHNOLOGY

Achieves blade diameters up to 33% narrower utilizing integrated insulation



320 Insulated Slotted SlimLine

Screwdrivers Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, aup to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item	0	0	Slim		==	•	
No.	mm	Inch	Dia.	mm	mm	lbs.	Pkg.
32046	3.5	9/64	3.5	100	204	.07	1
32049	4.0	5/32	4.0	100	211	.12	1
32052	4.5	3/16	4.5	125	211	.14	1
32055	5.5	7/32	5.5	125	243	.21	1
32058	6.5	1/4	6.5	150	268	.25	1



Insulated Xeno SlimLine Drivers
For Terminal Screws Insulation According
to ASTM F-1505, New VDE Specification
0682/part 201 and EN/IEC 60900, NFPA70E
& CSA, Aup to 1000 Volt. Individually
Tested to 10,000Volts.

Item	\oplus	Slim		===	•••	
No.	Size	Dia.	mm	mm	lbs.	Pkg.
30746	1	4.5	80	191	.12	1
30747	2	6.0	100	218	.21	1



Insulated Square SlimLine Drivers
Insulation According to ASTM F-1505, New
VDE Specification 0682/part 201 and EN/
IEC 60900, NFPA70E & CSA, Aup to 1000
Volt. Individually Tested to 10,000Volts.

Item	U	Slim		==	-	
No.	Size	Dia.	mm	mm	lbs.	Pkg.
35844	1	4.0	100	218	.12	1
35845	2	4.5	125	243	.19	1



321 Insulated Phillips SlimLine Screwdrivers Insulation According to

ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, $\stackrel{\frown}{\sim}$ up to 1000 Volt. Individually Tested to 10,000Volts.


Item 0 Slim Size lbs. Pkg. No. Dia. mm mm 32145 1 4.5 80 204 .12 32146 100 211 .21



Insulated Security **TORX*** SlimLine
Drivers Insulation According to ASTM, New
VDE Specification 0682/part 201 and EN/
IEC 60900, NFPA70E & CSA, $\stackrel{\frown}{\sim}$ up to 1000
Volt. Individually Tested to 10,000Volts.


item	$\boldsymbol{\psi}$	==		+ +		
No.	Size	mm	mm	lbs.	Pkg.	
32512	T10s	100	204	.08	1	
32513	T15s	100	211	.12	1	
32514	T20s	100	211	.12	1	
32515	T25s	125	243	.18	1	
32517	T27s	125	243	.21	1	
32518	T30s	125	243	.21	1	
32519	T40s	150	268	.26	1	



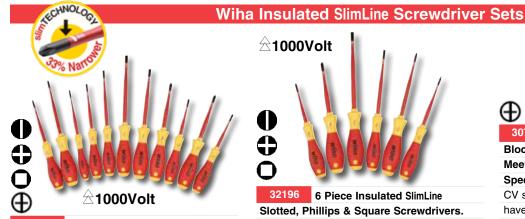

11 Piece Insulated SlimLine Slotted, Phillips, Xeno & Square Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, \Leftrightarrow up to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Wiha-SoftFinish® handle, multi-component, cushion grip.

Slotted: 3.5, 4.0, 4.5, 5.5, 6.5mm Item No. 32198 Phillips: #1, 2 Square: #1, 2 <u>__</u> Xeno: #1, 2 lbs. 1.75



32197 8 Piece Insulated SlimLine Slotted, Phillips & Square Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/ Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Wiha-SoftFinish® handle, multicomponent, cushion grip.

Item No. Slotted: 3.5, 4.0, 4.5, 5.5mm 32197 Phillips: #1, 2 Square: #1, 2 ₩ lbs. 1.18



32196 6 Piece Insulated SlimLine Slotted, Phillips & Square Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, \Leftrightarrow up to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Wiha-SoftFinish® handle, multicomponent, cushion grip.

Item	\$ Slotted: 4.5, 6.5mm	₽
No.	Phillips: #1, #2	lbs.
32196	O Square: #1, #2	1.15




6 Pc. Insulated SlimLine 32596


Security TORX® Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, ← up to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item No. Security TORX*: T10s, T15s, 32596 T20s, T25s, T27s, T30s

Wiha Slim TECHNOLOGY

Achieves blade diameters up to 33% narrower utilizing Wiha integrated insulation





30770 2 Pc. Insulated SlimLine Terminal Block Xeno Slotted/Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

 ★ Xeno: #1x80mm Item No. 30770 ★ Xeno: #2x100mm ₩ lbs. .34



32189 2 Pc. Insulated SlimLine Slotted & Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Individually Tested to 10,000Volts. High quality CV steel, through hardened, SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item No. \$\pm\$ Slotted: 4.5x125mm 32189 **Phillips:** #2x100mm **↓** lbs. .37




30 Pc. Insulated SlimLine Slotted & Phillips Screwdriver Display. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Tested to 10,000Volts. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. High quality CV steel, through hardened.

Item 6 of each: No. **Slotted:** 3.5, 4.5, 5.5mm 32079 **Phillips:** #1, #2



Wiha Insulated Screwdrivers with SoftFinish® Cushion Grip Handle



Responds to OSHA's use specification 29 CFR1910 Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc

SoftFinish® handle Solid molded core

with soft outer cushion grip. 40% more torque than

conventional handles

Insulation

Molded directly onto the blade for permanent bonding

₹1000V



 \pm 1000Volt




CVM tool steel, hardened


to average 58/60RC

Slotted Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, A up to 1000 Volt. Individually Tested.

Blade

	A up to 1000 voit. Individually rested.										
Item	‡(1)	‡ ()	10	==		==	==	•••			
No.	mm	Inch	Inch	mm	Inch	mm	Inch	lbs.	pkg.		
32005	2.0	.078	5/64	60	3.0	164	6.5	.05	10		
32010	2.5	.098	3/32	75	3.0	179	7.1	.06	10		
32012	3.0	.118	1/8	100	4.0	204	8.0	.07	10		
32015	3.5	.139	9/64	100	4.0	204	8.0	.07	10		
32017	4.0	.157	5/32	100	4.0	211	8.3	.12	10		
32023	4.5	.177	3/16	100	4.0	211	8.3	.12	10		
32024	4.5	.177	3/16	125	5.0	236	9.3	.12	10		
32027	4.5	.177	3/16	150	6.0	261	10.2	.14	10		
32025	4.5	.177	3/16	175	7.0	286	11.2	.13	10		
32028	4.5	.177	3/16	200	8.0	311	12.3	.15	10		
32031	5.5	.216	7/32	125	5.0	243	9.5	.15	10		
32026	5.5	.216	7/32	175	7.0	293	11.5	.21	10		
32034	6.0	.236	15/64	150	6.0	268	10.6	.21	10		
32039	6.5	.255	1/4	150	6.0	268	10.6	.21	10		
32042	8.0	.315	5/16	175	7.0	299	11.8	.34	10		
32045	10.0	.393	3/8	200	8.0	318	12.5	.39	10		








Phillips Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, earrow up to 1000 Volt. Individually Tested.


Item	•	==	==	==	===	←	
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.
32100	0	60	2.4	164	6.5	.06	10
32101	1	80	3.0	191	7.5	.12	10
32102	2	100	4.0	218	8.6	.20	10
32103	3	150	6.0	268	10.6	.34	10
32104	4	200	8.0	318	12.5	.39	10





Wiha Insulated Screwdriver Sets











 \pm 1000Volt



 \pm 1000Volt



Phillips: #0, 1

J lbs. .92

Tool box set in blow molded tray lpha 1000Volt

19 Piece Slotted, Phillips, Square, Xeno Screwdriver Set Insulated Screwdriver set in a light weight tool box tray. Item No. Slotted: 2.5, 3.0, 3.5, 4.0, 4.5, 32095 5.5, 6.0, 6.5, 8.0, 10.0mm **Phillips:** #0, #1, #2, #3 ___ Square: #1, #2 lbs. Xeno Terminal: #1, #2 4.92 Cat. III Voltage Detector -(Battery Operated)

Wiha Insulated Hex Metric Screwdrivers



Hex Metric Screwdriver, With Wiha-SoftFinish® Handle

Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, $\stackrel{.}{\bigtriangleup}$ up to 1000 Volt. Individually Tested Blade high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item		==	-		==			
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.	
32302	2.5	75	3.0	179	7.0	.06	10	
32303	3.0	75	3.0	179	7.0	.08	10	
32304	4.0	75	3.0	186	7.3	.12	10	
32305	5.0	75	3.0	186	7.3	.15	10	
32306	6.0	100	3.9	218	8.6	.24	10	
32308	8.0	100	3.9	218	8.6	.34	10	

1000Volt 32366 6 Piece Insulated Hex Metric Screwdriver Set Item No. 32366 **Hex Metric:** 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm

Wiha Insulated TORX® Screwdrivers




∻1000Volt

TORX® Screwdriver, With Wiha-SoftFinish® Handle

Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC steel, hardened, black finish. Insulation molded directly onto blade.

Item	0			==	==	•••	
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.
32505	T5	60	2.4	164	6.5	.06	10
32511	T6	60	2.4	164	6.5	.06	10
32516	T7	60	2.4	164	6.5	.06	10
32521	T8	60	2.4	164	6.5	.06	10
32526	T9	60	2.4	164	6.5	.06	10
32531	T10	60	2.4	164	6.5	.06	10
32536	T15	80	3.0	191	7.5	.12	10
32541	T20	80	3.0	191	7.5	.12	10
32546	T25	80	3.0	198	7.8	.17	10
32551	T27	100	4.0	218	8.6	.20	10
32556	T30	100	4.0	218	8.6	.20	10
32561	T40	150	6.0	274	10.8	.30	10
32566	T45	150	6.0	274	10.8	.35	10

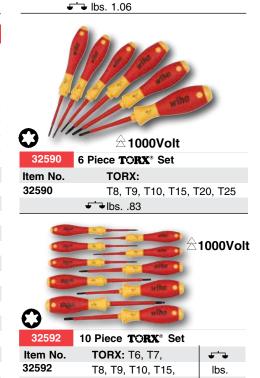


Wiha Insulated Square Tip Screwdrivers



black finis	sh.						
Item	0			==	==	•	
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.
35811	1	100	4.0	210	8.2	.12	10
35812	2	150	6.0	268	10.5	.19	10

Tested. Blade high alloy CVM steel, hardened,





T20, T25, T27, T30

1.2



Wiha Insulated Pozidriv® Screwdrivers

 \pm 1000Volt



Pozidriv® Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested.

Item		=	==	==	←	_
No.	Size	mm	mm	Inch	lbs.	pkg.
32400	0	60	164	6.5	.11	10
32401	1	80	191	7.5	.13	10
32402	2	100	218	8.6	.23	10
32403	3	150	267	10.5	.30	5

Insulated Terminal Block Xeno Screwdrivers



Combination Slotted/Phillips Terminal Block Drivers

Slotted/Phillips or Slotted/Pozidriv®

☆1000Volt



wiha (+) Slotted/Phillips

307 Combination Terminal Block Xeno Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested.

Blade CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip. For combination Slotted/Phillips head terminal screws.

Item	\oplus	==	==	==	┌┐
No.	Size	mm	mm	Inch	lbs. pkg.
30700	1	80	191	7.5	.13 10
30701	2	100	218	8.6	.23 10

Slotted/Pozidriv®

307 Combination Terminal Block Xeno Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested.

Blade CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip. For combination Slotted/Pozidriv® head terminal screws.

Item	₩	=		===	
No.	Size	mm	mm	Inch	lbs. pkg.
30711	1	80	191	7.5	.12 10
30712	2	100	218	8.6	.21 10

Cat. III Voltage Detector **Battery Operated**



☆1000Volt

25500 Battery Operated Voltage Detector Tests 90-1000 Volts. Category III, CE IEC 61010-1 With audible sound and light warnings. Requires 2 AAA batteries.

3 -					
Item	==	==	•		
No.	mm	Inch	lbs.	pkg.	
25500	150	6.0	.13	1	

Insulated Single-Pole Voltage Detector




Insulated Single-Pole Voltage Detector. 110-250Volts. Insulation According To DIN 57860/6 And DIN VDE 0680-6, GS

Tested. Blade CVM steel, hardened, nickelplated. Insulation molded directly onto blade. Amber LED light. 10,000Volt tested.

Item	‡(1)		==	==	
No.	mm	mm	mm	Inch	lbs. pkg.
25511	3.0	65	145	5.7	.04 1

Wiha Insulated Screwdrivers



32199 30 Pc. Workstation Insulated

Screwdriver Set **Slotted:** 3.5, 4.0, 4.5, 5.5, 6.5mm Item No. 32199 Phillips: #1, #2, #3 **₽** Pozidriv®: #1, #2 Square: #1, #2 lbs. 8.50 Xeno Terminal Slt/Ph: #1, #2 Hex Metric: 2.5, 3.0, 4.0, 5.0, 6.0mm TORX®: T8, T10, T15, T20, T25, T30 PicoFinish Slotted: 1.5, 2.0, 2.5mm PicoFinish Phillips: #00, #0

Insulated Drivers & Voltage Detector Sets




Voltage Detector Set In Molded Carry Case

Item **Slotted: 3.5,** 4.0, 4.5, 5.5mm No. Phillips: #1, #2 Xeno Slt/Ph: #2

Ins. Single Pole Voltage Detector

₩ lbs. 1.81

32089



7 Pc. Slotted, Phillips, Square &

Voltag	e De	tector Set
Item		Slotted: 4.0, 5.5, 6.5mm
No.		Phillips: #1, #2
32087		Square: #2
		Ins. Single Pole Voltage Detector
	<u></u>	lbs. 1.36

Toll Free: (800) 494-6104


Wiha Insulated Metric & Inch Nut Drivers

1000Volt wiha 1000Volt

Metric Nut Drivers, With Wiha-SoftFinish® Handle Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, \triangle up to 1000 Volt. Individually Tested. Blade CVM steel, hardened. Insulation molded directly onto blade. Deep drawn 1" socket. Wiha-SoftFinish® handle, multi-component.


Item	0		==		←		
No.	mm	mm	mm	Inch	lbs.	pkg.	
32206	4.0	125	236	9.3	.15	10	
32209	5.0	125	236	9.3	.16	10	
32212	5.5	125	236	9.3	.16	10	
32215	6.0	125	236	9.3	.16	10	
32218	7.0	125	243	9.6	.25	10	
32221	8.0	125	243	9.6	.25	10	
32224	9.0	125	243	9.6	.25	10	
32227	10.0	125	243	9.6	.27	10	
32230	11.0	125	243	9.6	.37	10	
32233	12.0	125	243	9.6	.38	10	
32236	13.0	125	243	9.6	.39	10	
32238	14.0	125	243	9.6	.39	10	
32239	15.0	125	243	9.6	.40	10	
32240	16.0	125	243	9.6	.42	10	
32241	17.0	125	243	9.6	.44	10	


322	Inch Nut Driv	ers, Wi	th Wiha-So	oftFinish	ո® Handl	е	
Item	0	==	==	==	← →		
No.	Inch	Inch	mm	Inch	lbs.	pkg.	
32255	5/32	5.0	236	9.3	.15	10	
32258	3/16	5.0	236	9.3	.15	10	
32261	7/32	5.0	236	9.3	.16	10	
32264	1/4	5.0	243	9.6	.24	10	
32267	5/16	5.0	243	9.6	.25	10	
32268	11/32	5.0	242	9.6	.26	10	
32270	3/8	5.0	243	9.6	.26	10	
32273	7/16	5.0	243	9.6	.36	10	
32276	1/2	5.0	243	9.6	.39	10	
32278	9/16	5.0	243	9.6	.39	10	
32280	5/8	5.0	243	9.6	.41	10	

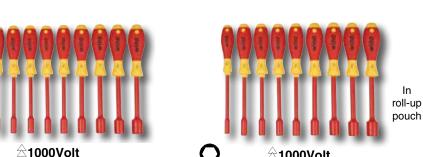



32296 11 Pc. Nut Driver Set - Inch Sizes Item Inch: 5/32, 3/16, 7/32, 1/4, No. 5/16, 11/32, 3/8, 7/16, Ibs. 32296 1/2, 9/16, 5/8" 3.00

O	☆1000Volt	
32288	9 Pc. Nut Driver Set - Inch	Sizes
Item	Inch: 3/16, 1/4,	- →
No.	5/16, 11/32, 3/8,	lbs.
32288	7/16, 1/2, 9/16, 5/8"	3.16









Multi-Bit Screwdrivers "Six Tools In One"

Tested to 10,000 Volts



Insulation meets EN/IEC 60900

Multi-Bit Screwdriver Sets

with Wiha Powerhandle, cellulose-acetate, impact resistant. Snap-lock rotatable cap. Chambered bit holder equipped with transparent selector & 6 bits. 1/4" Bit holder, stainless steel. Shaft CVM steel, hardened, chrome-plated. Packaged in clear blister package. Blade Length = 120mm (4.7") Overall Length = 230mm (9")

38006 Insulated Slotted/Phillips Multi-

Bit Screwdriver

Set includes the following 1/4" bits:

\$ **Slotted:** 5.5, 6.0mm **Phillips:** #0, 1, 2, 3

↓ lbs. .39



38007 Insulated Slotted/Phillips/Square **Multi-Bit Screwdriver**

Set includes the following 1/4" bits:

\$ 4 Slotted: 6.5, 8.0mm

Phillips: #1, 2 O Square: #1, 2

lbs. .41 🚅 🕽

Tested to 10,000 Volts



38025 Magnetic Bit Holder, 1/4" Wiha Powerhandle & insulated shaft. Holds up to 6 bits. (Holder only)

- lbs. .26

Wiha Insulated Pop-Up Insert Bit Sets



10,000 Volt Tested



38050 Insulated Pop-Up Bit Holder Set With 1/4" Insert Bits

Insulated cushion grip multi-component handle. Bit holder holds 1/4" Insert bits. Convenient rotating can

rotating	oup.
Item	Set includes the following bits:
No.	\$ Slotted: 4.5, 5.5, 6.0mm
38050	Phillips: #0, 1, 2, 3
	O Square: #1, 2, 3
	Pozidriv [®] : #1, 2, 3
	₩ lbs46



38051 Insulated Pop-Up Bit Holder Set

With 1/4" Insert Bits

Insulated cushion grip multi-component handle. Bit holder holds 1/4" Insert bits. Convenient rotating cap.

Item	Set includes the following bits:
No.	\$ Slotted: 4.5, 5.5, 6.0mm
38051	Phillips: #0, 1, 2, 3
	O Square: #1, 2, 3
	TORX*: T15, T20, T25
	↓ lbs46

WARNING!

Insulated Tools are intended to provide protection against accidental contact with charged energized circuits. For maximum safety we recommend de-energizing all circuits whenever possible before starting work on electrical apparatus or conductors. Always visually inspect insulation on tools before use, do not use tools if insulation shows signs of wear or damage to the insulated areas of the tool. Wear appropriate eye protection when using hand tools. Use NFPA70E certified insulated protective outer wear when appropriate.

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation, always wear approved eye protection, Inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to +70° C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.

Toll Free: (800) 494-6104



32990 17 Pc. Insulated Pop-Up Bit Holder & Industrial Pliers/

Cutters Set High quality CV steel, through hardened. Cushion grip handle with magnetic holder to securely hold bits. Pliers & Cutters drop-forged from special tool steel. Industrial Soft grip ergonomically designed handle body. In belt pack pouch

Item No.	Set Includes 1/4" Insert Bits:
32990	Slotted: 4.5, 5.5, 6.0mm • Phillips: #0, 1, 2, 3
	Square: #1, 2, 3 • TORX*: T15, T20, T25
lbs.	8.0"/200mm Long Nose Pliers
3.60	8.0"/200mm High Leverage Cutters
	9.5"/245mm Lineman's Pliers



32886 17 Pc. Insulated Pop-Up Bit Holder & Pliers/Cutters Set

High quality CV steel, through hardened. Cushion grip handle with magnetic holder to securely hold bits. Pliers & Cutters additionally induction hardened. Hard chrome finish for long lasting corrosion protection. Two component Insulated soft grip handle. In belt pack pouch

Item No.	Set Includes 1/4" Insert Bits:		
32886	Slotted: 4.5, 5.5, 6.0mm • Phillips: #0, 1, 2, 3		
↓	Square: #1, 2, 3 • TORX *: T15, T20, T25		
lbs.	8.0"/200mm Long Nose Pliers		
3.72	8.0"/200mm High Leverage Cutters		
	9.5"/245mm Lineman's Pliers		





oxtime1000Volt

32873 3 Piece Insulated Pliers/Cutters

In Belt Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard.

•	
Item No.	Insulated Pliers & Cutters
32873	6.3" / 160mm Diagonal Cutters
	8.0" / 200mm Long Nose Pliers
	8.0" / 200mm Combination Pliers
	lbs. 2.12

Wiha Insulated Belt Pack Pouch Sets



32871 3 Piece Insulated Pliers/Cutters & Multi-Bit Set In Belt

Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard. Insulated multi-bit screwdriver includes Slotted, Phillips & Square bits.

	· · · · · · · · · · · · · · · · · · ·
Item No.	Pliers/Cutters & Multi-Bit Set
32871	6.3" / 160mm Diagonal Cutters
	8.0" / 200mm Long Nose Pliers
	Set Includes Bit Holder & The Following Bits:
	Slotted: 4.5, 6.5mm • Phillips: 1, 2 • Square: 1, 2
	lbs. 1.67



32875 5 Pc. Insulated Pliers/Cutters & SlimLine Screwdrivers

In Belt Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard. Insulated cushion grip

drivers, multi-component. Blade CVM tool steel, nardened.			
Item No. Insulated Pliers/Cutters & Screwdrivers			
32875	9.0" / 225mm Lineman's Pliers		
	8.0" / 200mm Long Nose Pliers		
Insulated SlimLine SoftFinish® Screwdrivers:			
	Slotted: 4.5, 6.5mm • Phillips: 2		
↓	lbs. 2.26		







\pm 1000Volt

32872 5 Piece Insulated Pliers/Cutters & Screwdrivers In Belt Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard. Insulated

cushion gr	ip drivers, multi-component. Blade CVM tool steel, hardened		
Item No. Insulated Pliers/Cutters & Screwdrivers			
32872	6.3" / 160mm Diagonal Cutters		
	8.0" / 200mm Long Nose Pliers		
Insulated SoftFinish® Screwdrivers:			
	Slotted: 3.0, 4.5mm • Phillips: 2		



Wiha Insulated Master Electrician's Tools

Insulation Test Standards:

Insulation according to EN/IEC 60900, ASTM F-1505, New VDE 0682/part 201, DIN 7437, NFPA70E & CSA



All Tools In **Dedicated Positions** For Quick Storage & Easy Location **Tracking**














80 PC. Insulated Master Electrician's Tool Set In Rolling Water Tight Traveling Tool Box - 10,000Volt Tested, 1000Volt Rated


10,000 voit 100tou, 1000 voit Hatea
↓ lbs. 33.9
6.3" Diagonal Cutters
8.0" High Leverage Cutters
6.3" Cable Cutters
6.3" Stripping Pliers
8.0" Adjustable Wrench
Insulated Slotted: 2.5, 3.0, 3.5,
4.0, 4.5, 5.5, 6.0, 6.5, 8.0, 10.0mm
Insulated Phillips: #0, 1, 2, 3
Insulated Xeno Slotted/Phillips
Terminal: #1, 2
Insulated Square: #1, 2
Insulated TORX: T6, T7, T8, T9,
T10, T15, T20, T25, T30
Insulated L-key: 10mm
Insulated L-key: 1/2"
Insulated Cable Knife: 50mm
Insulated Folding Ruler In/MM
Cat. III Voltage Detector-
Battery Operated

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation, always wear approved eye protection, Inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to +70° C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.

Wiha Insulated Master Electrician's Tools



















All Tools In Dedicated **Positions** For Quick Storage & **Easy Location Tracking**




112 Pc. Insulated Master Electrician's Tool Set In Rolling Water Tight Traveling Tool Box - 10,000Volt Tested, 1000Volt Rated

water right travelling roof box - i	0,000 voit Testeu, 1000 voit hateu
Item# 32801 Set Includes:	↓ → lbs. 51.3
6.3" Long Nose Pliers	6.3" Diagonal Cutters
8.0" Long Nose Pliers	8.0" High Leverage Cutters
6.3" Bent Nose Pliers	6.3" Cable Cutters
6.3" Long Flat Nose Pliers	6.3" Stripping Pliers
9.0" Combo Pliers/Crimpers	8.0" Adjustable Wrench
Insulated Inch Sockets: 1/2, 9/16,	Insulated Slotted: 2.5, 3.0, 3.5,
5/8, 11/16, 3/4, 13/16, 7/8"	4.0, 4.5, 5.5, 6.0, 6.5, 8.0, 10.0mm
Insulated Metric Sockets:	Insulated Phillips: #0, 1, 2, 3
13.0, 14.0, 15.0, 17.0, 19.0,	Insulated Xeno Slotted/Phillips
20.0, 22.0mm	Terminal: #1, 2
Insulated Ratchet 3/8" Drive	Insulated Square: #1, 2
Insulated 4.9" Extension 3/8" Dr.	Insulated TORX: T6, T7, T8, T9,
Insulated Inch Nut Drivers:	T10, T15, T20, T25, T30
7/32, 1/4, 5/16, 3/8, 7/16"	Insulated T-handle Inch Hex:
Insulated Metric Nut Drivers:	5/32, 3/16, 7/32, 1/4, 5/16, 3/8"
5.0, 5.5, 6.0, 7.0, 8.0,	Insulated T-handle Metric Hex:
10.0, 13.0mm	4.0, 5.0, 6.0, 8.0mm
Insulated L-key: 10mm	Insulated Inch Deep Offset Ring
Insulated L-key: 1/2"	Wrenches: 1/4, 5/16, 3/8, 7/16,
Insulated Cable Knife: 50mm	1/2, 9/16, 5/8, 11/16, 3/4, 25/32,
Cat. III Voltage Detector-	13/16, 7/8, 15/16, 1, 1-1/16, 1-1/4"
Battery Operated	Insulated Metric Deep Offset
Insulated Folding Ruler In/MM	Ring Wrenches: 8.0, 9.0,
	10.0, 11.0, 12.0, 13.0, 14.0, 15.0,
	17.0, 19.0, 20.0, 22.0, 24.0, 27.0,
	30.0, 32.0mm



Wiha 1000Volt Insulated Tool Sets - Comfort Grip Handles

Master Electrician's Sets

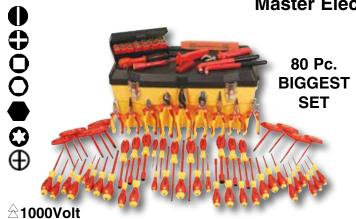

	ZZIUUUV	OIT	
32877 80 Piece Insulated Master Electrician's S			aster Electrician's Set
	Item# 3287	7 Set Includes:	↓ ↓ lbs. 27.0
	6.3" Long N	lose Pliers	6.3" Diagonal Cutters
	6.3" Bent N	lose Pliers	8.0" BiCut SuperCut
	8.0" Long N	lose Pliers	8.0" Cable Cutters
	6.3" Long F	Flat Nose Pliers	6.3" Stripping Pliers
	9.0" Combo	Pliers/Crimpers	8.0" Adjustable Wrench
	Insulated S	lotted 2.0mm	Insulated Nut Driver 7/32"
	Insulated S	lotted 2.5mm	Insulated Nut Driver 1/4"
	Insulated S	lotted 3.0mm	Insulated Nut Driver 5/16"
	Insulated S	lotted 3.5mm	Insulated Nut Driver 3/8"
	Insulated S	lotted 4.0mm	Insulated Nut Driver 7/16"
	Insulated S	lotted 4.5mm	Insulated Nut Driver 5.0mm
	Insulated S	lotted 5.5mm	Insulated Nut Driver 5.5mm
	Insulated S	lotted 6.0mm	Insulated Nut Driver 6.0mm
	Insulated S	lotted 6.5mm	Insulated Nut Driver 7.0mm
	Insulated S	lotted 8.0mm	Insulated Nut Driver 8.0mm
	Insulated S	lotted 10.0mm	Insulated Nut Driver 10.0mm
	Insulated P	hillips #0	Insulated Nut Driver 13.0mm
	Insulated P	hillips #1	Insulated T-handle Hex 5/32"
	Insulated P	hillips #2	Insulated T-handle Hex 3/16"
	Insulated P	hillips #3	Insulated T-handle Hex 7/32"
	Insulated S	lt/Ph Terminal #1	Insulated T-handle Hex 1/4"
	Insulated S	lt/Ph Terminal #2	Insulated T-handle Hex 5/16"
	Insulated T	orx T6	Insulated T-handle Hex 3/8"
	Insulated T	orx T7	Insulated T-handle Hex 4.0mm
	Insulated T	orx T8	Insulated T-handle Hex 5.0mm
	Insulated T	orx T9	Insulated T-handle Hex 6.0mm
	Insulated T	orx T10	Insulated T-handle Hex 8.0mm
	Insulated T	orx T15	Insulated L-key 10mm
	Insulated T	orx T20	Insulated L-key 1/2"
	Insulated T	orx T25	Insulated Cable Knife 50mm
	Insulated T	orx T30	Insulated Folding Ruler In/MM
	Insulated S	quare #1	Insulated Ratchet 3/8" Dr.
	Insulated S	quare #2	Insulated 4.9" Extension
	Insulated S	ocket 1/2"	Insulated Socket 13mm
	Insulated S	ocket 9/16"	Insulated Socket 14mm
	Insulated S	ocket 5/8"	Insulated Socket 15mm
	Insulated S	ocket 11/16"	Insulated Socket 17mm
	Insulated S	ocket 3/4"	Insulated Socket 19mm
	Insulated S	ocket 13/16"	Insulated Socket 20mm
	Insulated S	ocket 7/8"	Insulated Socket 22mm



32876 66 Pc. Master Electrician's Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, tool steel, individually high frequency induction hardened, chrome/nickel plated, mirror-polished.

platea, illinoi pe		
Item# 32876	Set Includes:	↓ lbs. 21.5
8.0" Long Nose		6.3" Side Cutters
6.3" Long Flat N	lose	8.0" BiCut SuperCut
9.0" Combo Pliers/Crimpers		6.3" Stripping Pliers
8.0" Cable Cutte	ers	8.0" Adjustable Wrench
Insulated Nut D	river 1/4"	Insulated Slotted 2.0mm
Insulated Nut D	river 5/16"	Insulated Slotted 2.5mm
Insulated Nut D	river 11/32"	Insulated Slotted 3.0mm
Insulated Nut D	river 3/8"	Insulated Slotted 4.0mm
Insulated Nut D	river 7/16"	Insulated Slotted 4.5mm
Insulated T-han	dle Hex 4.0mm	Insulated Slotted 5.5mm
Insulated T-han	dle Hex 5.0mm	Insulated Slotted 6.0mm
Insulated T-han	dle Hex 6.0mm	Insulated Slotted 8.0mm
Insulated T-han	dle Hex 8.0mm	Insulated Slotted 10.0mm
Insulated T-han	dle Hex 5/32"	Insulated Phillips #0
Insulated T-han	dle Hex 3/16"	Insulated Phillips #1
Insulated T-han	dle Hex 7/32"	Insulated Phillips #2
Insulated T-han	dle Hex 1/4"	Insulated Phillips #3
Insulated T-han	dle Hex 5/16"	Insulated Torx T8
Insulated T-han	dle Hex 3/8"	Insulated Torx T10
Insulated Hex L	-key 10.0mm	Insulated Torx T15
Insulated Hex L	-key 1/2"	Insulated Torx T20
Insulated Socke	et 1/2"	Insulated Torx T25
Insulated Socke	et 9/16"	Insulated Torx T30
Insulated Socke	et 5/8"	Insulated Square #1
Insulated Socke	et 11/16"	Insulated Square #2
Insulated Socke	et 3/4"	Insulated SIt/Ph Terminal #1x80
Insulated Socke	et 13/16"	Insulated SIt/Ph Terminal #2x100
Insulated Socke	et 7/8"	Insulated Cable Knife 50mm
Insulated Socke	et 8.0mm	Insulated Extension 4.9"
Insulated Socke	t 10.0mm	Insulated Ratchet 3/8" Driver
Insulated Socke	et 13.0mm	Insulated Socket 17.0mm
Insulated Socke	t 14.0mm	Insulated Socket 19.0mm
Insulated Socke	t 15.0mm	Insulated Socket 22.0mm

Wiha 1000Volt Insulated Tool Sets - Comfort Grip Handles



50 Piece Insulated Tool Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, up to 1000 volt. Individually Tested. Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome/nickel plated, mirror-polished. Cushion Grip Insulated handles. Canvas tool bag.

Item# 32874 Set Includes:	- → lbs. 19.8
6.3" Long Nose Pliers	6.3" Side Cutters
8.0" Long Nose Pliers	8.0" BiCut SuperCut
6.3" Combination Pliers	6.3" Stripping Pliers
9.0" Combo Pliers/Crimpers	8.0" Adjustable Wrench
10.0" Water Pump Pliers	Battery Operated Voltage Detector

Slotted: 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0, 6.5, 8.0mm Phillips: #0, 1, 2, 3 Square: #1, 2 Slt/Ph Terminal: #1, 2

TORX: T8, T9, T10, T15, T20, T25, T27, T30 Hex Inch: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" Nut Driver Inch: 7/32, 1/4, 5/16, 3/8, 7/16, 1/2"

50mm Cable Stripping Knife & Insulated Inch/Metric Folding Ruler



32878	13 Piece Pliers & Screwdriver Set.	In canvas tool bag
H // 000	10 Oct Includes — Ilea 540	

Item#32878 Set Includes: → → lbs. 5.16		
8.0" Long Nose	50mm Cable Stripping Knife	
8.0" BiCut SuperCut	Insulated Slotted: 3.0mm	
9.0" Combo Pliers/Crimpers	Insulated Slotted: 4.5mm	
Insulated Phillips: #1	Insulated Slotted: 6.0mm	
Insulated Phillips: #2	Insulated Square: #1	
Insulated Slt/Ph Terminal: #1	Insulated Square: #2	
Insulated Slt/Ph Terminal: #2		



25 Pc. Pliers & Screwdriver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E &

Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome/nickel plated, mirror-polished. In tool box.

	· · · · · · · · · · · · · · · · · · ·	
Item# 32879 Set Includes:	↓ ' ↓ lbs. 11.92	
8.0" Long Nose	6.3" Stripping Pliers	
9.0" Combination Pliers	Insulated Inch & Metric Folding Ruler	
8.0" BiCut SuperCut	8.5" Insulated Knife	
Slotted: 3.0, 4.5, 6.0mm	Phillips: #1, #2	
Square: #1, #2	Terminal Block Driver: #1, #2	
Inch Nut Driver: 1/4, 5/16, 11/32, 3/8, 7/16, 1/2"		
Metric Nut Driver: 7.0.8.0.10.0.13.0mm		



31 Pc. Pliers & Screwdriver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 volt. Individually Tested. Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome/nickel plated, mirror-polished. Set includes Insulated Inch & Metric folding ruler.

	9
Item# 32896 Set Includes	: 🚅 lbs. 12.85
6.3" Long Nose Pliers	6.3" Side Cutters
8.0" Long Nose Pliers	8.0" BiCut SuperCut
7.0" Linemans Pliers	6.3" Stripping Pliers
9.0" Combination Pliers	6.3" Round Nose Pliers
Slotted: 2.0, 2.5, 3.0, 3.5, 4.5,	5.5, 6.5, 8.0, 10.0mm
Phillips: #0, #1, #2, #3	

Inch Nut Driver: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16"



Wiha Insulated Pliers with High Visibility Comfort Grip Handle

\uparrow 1000Volt



- Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished.
- In zipper carry case

10 Piece Pliers & Screwdriver Set

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{h}{\sim}$ up to 1000 volt. Individually Tested.

Item# 32891	Set Includes:	ᢖ⁺ ᢖ lbs. 5.54
8.0" Combination	Pliers	8.0" Long Nose
8.0" BiCut Super0	Cut	6.3" Cable Cutters
6.3" Universal Wire Stripper		
Insulated Phillips	#1	Insulated Slotted 4.5mm
Insulated Phillips	#2	Insulated Slotted 6.5mm
Insulated Phillips	#3	



- Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished.
- In zipper carry case

☆ 1000Volt

14 Piece Pliers & Screwdriver Set

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM

,	, <u>~</u> .		
Item# 32895	Set Includes: 🖝	→ lbs. 6.60	
8.0" Long Nose)	6.3" Side Cutters	
9.0" Combination Pliers		8.0" BiCut SuperCut	
6.3" Stripping Pliers		Insulated Slotted 2.5mm	
Insulated Phillips #1		Insulated Slotted 3.0mm	
Insulated Phillips #2		Insulated Slotted 3.5mm	
Insulated Phillips #3		Insulated Slotted 4.5mm	
Insulated Slotted 2.0mm		Insulated Slotted 6.5mm	







← 1000Volt

32888	11 Piece Pliers & Scre	ewdriver Set In Canvas Pouch
Item# 32888 Set Includes: → Ibs. 3.58		
6.3" Long I	Vose	6.3" Side Cutters
8.0" Combination Pliers 6.3" Stripping Pliers		
Insulated Slotted 2.5mm Insulated Phillips #0		
Insulated Slotted 3.5mm Insulated Phillips #1		
Insulated Slotted 4.5mm Insulated Phillips #2		
Insulated Slotted 6.0mm		





32892 10 Piece Pliers & Screwdriver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, up to 1000 volt. Individually Tested. Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished. In canvas tool bag

chrome and meker plated, mirror polished. In carryas tool bag		
Item#32892 Set Includes:	↓ Ibs. 6.64	
8.0" Bent Nose	8.0" Combination Pliers	
6.3" Long Nose	6.3" Side Cutters	
Insulated Phillips #0	Insulated Slotted 3.0mm	
Insulated Phillips #1	Insulated Slotted 4.5mm	
Insulated Phillips #2	Insulated Slotted 6.5mm	





32894	13 Piece Pliers & Scr	ewdriver Set In canvas tool bag
Item# 32894 Set Includes: ↓ bs. 9.5		
8.0" Bent N	lose	8.0" Combination Pliers
6.3" Long Nose		6.3" Side Cutters
10" Water Pump Pliers		
Insulated Slotted: 4.5 & 6.5mm		Insulated Nut Driver:
Insulated Phillips: #1 & #2 1/4		1/4, 5/16, 3/8, 1/2"



Wiha Insulated Pliers with High Visibility Comfort Grip Handle

 Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished.



← 1000Volt

32889 8 Piece Pliers & Cutters Set

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{\frown}{\sim}$ up to 1000 volt. Individually Tested.

,	· · · · · · · · · · · ·		
Item# 32889	Set Includes:	↓ lbs. 4.63	
6.3" Long Nose F	Pliers	8.0" Long Nose Pliers	
6.3" Lineman's Pliers 6.		6.3" Diagonal Cutters	
9.0" Lineman's Pliers 8.0" E		8.0" BiCut SuperCut	
6.3" Wire Strippin	ng Pliers	Electrician's Knife	



☆ 1000Volt

32007	10 Piece Pliers &	Screwdriver Set In Canvas Pouch
Item#3286	37 Set Includes	: ᢏ → lbs. 4.06
6.3" Diago	nal Cutters	9.0" Combo Pliers
6.3" Long I	Nose Pliers	6.3" Wire Strippers
7.0" Crimp	ing Pliers	

Insulated Slotted 4.5mm	Insulated Phillips #1
Insulated Slotted 6.0mm	Insulated Phillips #2
Inculated Square: #2	




\uparrow 1000Volt

32869 14 Piece Pliers/Cutters & Screwdrivers Set
Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM
F-1505, NFPA70E & CSA, Aup to 1000 volt. Individually Tested.

Item# 32869 S	Set Includes:	↓ → lbs. 6.52	
9.0" Lineman's Pli	ers	8.0" BiCut SuperCut	
8.0" Cable Cutters	•	8.0" Long Nose Pliers	
6.0" Stripping Pliers 10-20 AWG			
SlimLine Slotted 3	.0, 4.5, 6.5mm	SlimLine Phillips #1, 2	
SlimLine Square #1, 2 SlimLine Terminal #2			
Single Pole Tester			



☆ 1000Volt




7.0" Diagonal Cutters9.0" Combo Pliers8.0" Long Nose Pliers6.3" Wire Strippers

7.0" Crimping Pliers

Insulated Slotted 3.0, 4.5, 6.0mm

Insulated Phillips #1, 2





7 Pc. Pliers & Driver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,

☆ up to 1000 volt. Individually Tested. In molded tool box

Item# 32899 Set Includes:

→ lbs. 5.39

9.0" Linemans Pliers 6.3" Long Nose Pliers W/Cutter

6.3" Diagonal Cutter

Insulated Phillips #1, 2 Insulated Slotted 3.0, 4.5mm



Insulated Pliers/Cutters & Screwdrivers Sets



32856 5 Pc. Insualted Pliers/Cutters & Screwdriver Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{\triangle}{\sim}$ up to 1000 volt. Individually Tested. Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Screwdriver blade high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Insulated Pliers/Cutters
32856	8.0" Long Nose Pliers
<u></u>	6.3" Diagonal Cutters
lbs.	Insulated Slotted & Phillips Drivers
1.81	Slotted: 4.5, 5.5mm
	Phillips: #2



7 Pc. Insualted Pliers/Cutters & Screwdriver Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{\triangle}{\sim}$ up to 1000 volt. Individually Tested. Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Screwdriver blade high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Insulated Pliers/Cutters
32857	8.0" BiCut SuperCut Pliers
	Insulated Slotted & Phillips Drivers
lbs.	Slotted: 3.5, 4.5, 5.5mm
1.85	Phillips: #0, #1, #2



32865 8 Pc. Insualted Pliers/Cutters & SlimLine Blade Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{}{\sim}$ up to 1000 volt. Individually Tested. Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. SlimLine blades high alloy CV steel, through hardened. Blades have up to 33% narrower insulation diameter then standard insulated tools.

Item No.	Insulated Pliers/Cutters
32865	8.0" Long Nose Pliers
	Insulated Slotted & Phillips SlimLine Blades
lbs.	Slotted: 3.0, 4.0, 5.5, 6.5mm
.98	Phillips: #1, #2



↑ 1000Volt

32858 7 Pc. Insualted Pliers/Cutters & Screwdriver Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{\triangle}{\sim}$ up to 1000 volt. Individually Tested. Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Screwdriver blade high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Insulated Pliers/Cutters
32858	8.0" Combination Lineman's Pliers
↓	Insulated Slotted & Phillips Drivers
lbs.	Slotted: 3.5, 4.5, 5.5mm
1.81	Phillips: #0, #1, #2



Insulated Pliers & Cutters Sets



2 Pc. Insualted Pliers & Cutters Set

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{h}{\sim}$ up to 1000 volt. Individually Tested.

Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC.

Item No. **Insulated Pliers & Cutters Pliers ↓** lbs. 1.66

32862 8.0" BiCut SuperCut Pliers

8.0" Combination Pliers



32863 3 Pc. Insualted Pliers/Cutters & Stripping Pliers Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{\triangle}{\sim}$ up to 1000 volt. Individually Tested.

Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC.

	3
Item No.	Insulated Pliers/Cutters & Stripping Pliers
32863	8.0" High Leverage Diagonal Cutters
lbs.	9.0" Lineman's Pliers W/Crimpers

6.3" Stripping Pliers Strips 0.81-2.59 / AWG #20-#10 2.21



32864 3 Pc. Insualted Pliers & Cutters Set

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $\stackrel{\frown}{\sim}$ up to 1000 volt. Individually Tested.

Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC.

Item No. Insulated Pliers & Cutters 32864 6.3" Diagonal Cutters 8.0" Long Nose Pliers lbs. 8.0" Combination Lineman's Pliers 1.94

NE Style Lineman's Pliers Set



32833 2 Pc. NE Style Lineman's Pliers Set

Item No. **NE Style Lineman's Pliers**

32833 9.5" Insulated & 9.5" Vinyl Soft Grip - Lineman's Pliers

Insulated BiCut SuperCut








- Double the power at the press of a button
- BiCut does the job of two pairs of pliers
- Up to 50% less hand strength required for cutting
- Cutting force doubled for extremely hard materials
 - Easily switch between two strengths in one-handed operation

Insulated BiCut SuperCut. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 Volt. Individually Tested. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Drop forged of high C70 steel. For cutting various materials from soft to extremely hard, such as nails, screws, bolts, wire cables, spring wires, chains, etc.

Item		\leftrightarrow		<u></u>
No.	mm	Inch	Pkg.	lbs.
32837	200	8.0	1	.78



Insulated Linemans Pliers With Crimpers



32821 Insulated Lineman's Pliers "5-In-1" Professional Design Insulation According to EN/IEC, ASTM, NFPA70E & CSA, ⇔ up to 1000 volt. Individually Tested.

Deep cut radius conduit jaws for non-slip handling. Sure grip knurled & cross hatched flat jaw for non-slip griping. Extra long induction hardened precision matched cutting edges. Lower crimping jaw accepts most standard non-insulated electrical connectors. Large head with square anvil surface on each side. Made from premium CV tool steel forgings. Two component cushion grips for best user comfort.

Item	\rightarrow	\leftarrow	Cutting Capacity		<u></u>
No.	mm	Inch	Copper AWG	Pkg.	wt.
32821	225	9.0	#4	1	.98

Insulated High Leverage Combination Pliers



32820 High Leverage Combination Pliers. Insulation According volt. Individually Tested. DIN ISO 5746

Extra long cutting edge for flat and round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 64HRC. C70 Special tool steel. Use for gripping, pulling & holding as well as cutting wires and cables ranging in hardness from soft to extremely hard. Two component soft grip ergonomic handles.

Item	→	→	Cutting Capacity		<u></u>
No.	mm	Inch	Copper AWG	Pkg.	wt.
32820	225	9.0	#4	1	.86





Insulated NE Style Lineman's Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, A up to 1000 Volt. Individually Tested. Long life edge is achieved through additional induction hardening to approx. 64HRC. Special C70 tool steel hardened & tempered. Extra long cutting edge for flat and round cables. Two component soft grip ergonomic handles.

Item	→				
No.	mm	Inch	Pkg.	wt.	
32831	245	9.5	1	1.18	

Insulated Combination Lineman's Pliers



328 Combination Pliers. Insulation According to VDE 0682/ part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 volt. Individually Tested. DIN ISO 5746 Extra long cutting edge for flat & round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 64HRC. C70 Special tool steel, Chrome finish. Use for gripping and holding as well as cutting soft and hard wires and cables. Two component soft grip ergonomic handles.

Item	\longrightarrow	\longrightarrow	Cutting Capacity		•••
No.	mm	Inch	Copper AWG	Pkg.	wt.
32814	160	6.3	#10	1	.53
32816	180	7.0	#9	1	.58
32818	200	8.0	#8	1	.72

Insulated Crimping Pliers



32841 Insulated Crimping Pliers. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, \Leftrightarrow up to 1000 Volt. Individually Tested.

Semi-circular profiles for secure connection between end sleeve and conductor. Long life is achieved through additional induction hardening to 64HRC. C70 special tool steel hardened & tempered.

Item	→	→				- →
No.	mm	Inch	mm2	AWG	Pkg.	wt.
32841	180	7.0	0.25-2.5	6-30	1	.57

Insulated Diagonal Cutters



Diagonal Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, up to 1000 volt. Individually Tested. DIN ISO 5749 Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 60 HRC. Special tool steel hardened and tempered. For soft & medium hard wire. 32832 & 32834 for soft, hard & piano wire.

Item	←	→	Cutting Capacity		•••
No.	mm	Inch	Copper AWG	Pkg.	wt.
32830	140	5.5	#6	1	.47
32832	160	6.3	#6	1	.49
32834	180	7.0	#6	1	.62

Insulated High Leverage Diagonal Cutters



High Leverage Diagonal Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \triangle up to 1000 volt. Individually Tested. DIN ISO 5749

Semi-circular. Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. C70 special tool steel hardened and tempered to high quality. For soft, hard and piano wire, lay-on joint, optimized power transmission.

Item	\leftarrow	\leftarrow	Cutting Capacity		
No.	mm	Inch	Copper AWG	Pkg.	wt.
32835	160	6.3	#6	1	.64
32836	180	7.0	#5	1	.67
32838	200	8.0	#4	1	.80

Insulated Electrician's Diagonal Cutters



Diagonal Cutters W/Stripping Holes. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Aup to 1000 volt. Individually Tested. Drop-forged from special tool steel, cutters additionally induction hardened to approx. 64HRC, chrome-nickel plated, mirror-polished. Ergo comfort grip with slip guard. Holes in the cutting edge for stripping copper wire of Ø 1.5 and 2.5.

Item	\longrightarrow	\leftrightarrow	Cutting Capacity		
No.	mm	Inch	Copper AWG	Pkg.	wt.
32861	160	6.3	#6	1	.55

Insulated Serrated Edge Cable Cutters



328 Serrated Edge Cable Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA,

up to 1000 Volt. Individually Tested. Light, clean cutting ground precision cutting edges. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Special tool steel, hardened & tempered. For cutting of copper & aluminum cables without crushing.

Item	→	\leftarrow				•••
No.	mm	Inch	Ø	mm2	Pkg.	lbs.
32826	160	6.3	16	50	1	.42
32828	200	8.0	20	60	1	.67

Insulated Stripping Pliers



32860 Stripping Pliers. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA,

wup to 1000 volt. Individually Tested. Heavy duty forged, induction hardened cutting edges for even stripping of insulation. Drop-forged from special tool steel, chrome and nickel plated, mirror-polished. Spring and adjusting screw, for stripping up to Ø 5mm/#4 Awg.

Item	↔	\rightarrow	Stripping Capacity		₹ **
No.	mm	Inch	Copper AWG	Pkg.	wt.
32860	160	6.3	#8 - #28	1	.50

Insulated Stripping Pliers



Insulated Stripping Pliers. Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification. Individually Tested. Wide long head with ridged gripping surface, shears blade and firm wire stripping stations. Wire stripping stations 0.81 / 1.0 / 1.3 / 1.6 / 2.0 / 2.59mm, AWG 20 / 18 / 16 / 14 / 12 / 10.

Item No.	mm	Inch	Ø	AWG	Pkg.	lbs.
10250	160	6.3"	0.81-2.59	20-10	1	.26



328 Long Nose Pliers With Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, up to 1000 volt. Individually Tested. Drop-forged from special tool steel, cutters additionally induction hardened to approx. 64HRC, chrome-nickel plated, mirror-polished.

Item	\leftarrow	\rightarrow	Cutting Capacity		
No.	mm	Inch	Copper AWG	Pkg.	wt.
32806	160	6.3	#10	1	.32
32808	200	8.0	#8	1	.42

Insulated Bent Nose Pliers



328 Bent Nose Pliers With Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,

up to 1000 volt. Drop-forged from special tool steel, cutters additionally induction hardened to approx. 64HRC, chrome-nickel plated, mirror-polished. Serrated gripping surface, nose bent 40°.

Item	→	\leftarrow	Cutting Capacity		
No.	mm	Inch	Copper AWG	Pkg.	wt.
32804	200	8.0	#8	1	.43
32807	160	6.3	#10	1	.32

Insulated Round Nose Pliers



32870 Round Nose Pliers. Insulation According to VDE 0682/part 01, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, aup to 1000 volt. Individually Tested. Drop-forged from special tool steel, individually induction hardened, chrome and nickel plated, mirror-polished. Ergonomic comfort grip with slip guard. Serrated jaws.

Item	-	↔		•••
No.	mm	Inch	Pkg.	wt.
32870	160	6.3	1	.34

Insulated Long Flat Nose Pliers



32810 Long Flat Nose Pliers. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, pu to 1000 volt. Individually Tested. DIN ISO 5745 Extra long head. Serrated Jaws are induction hardened. Special CV tool steel forgings, Chrome finish. Two component Soft Grip handles.

Use for Gripping and right-angle bending of wires and sheet metal parts.

Item

No. mm Inch Pkg. wt.

6.3

Wiha Canvas Pliers Holster

· Canvas holster with belt clip and belt loop

160

· Security pliers strap

32810

· Screwdriver holder in the front

91256	Pliers (Pliers Canvas Holster							
Item	Width	Height	•••						
No.	Size	Size	lbs.	pkg.					
91256	3.5 x	6.75	.15	1					



.39



Pen Style Control Cabinet Key





21105 Pen Style Control Cabinet Key Diecast Zinc, polished finish. Includes: Square 5, 6, 7, 8mm, Triangular 9mm, Double Bit Key 5mm/Internal & 9mm/External, Universal 1/4" Bit Adapter, Magnetic Bit Holder & 2 Double Insert Bits: Slotted 7mm / Phillips #2, TORX T20/T25

Item No.	mm	Inch	Pkg.	lbs.	
21105	140	5.5"	1	.30	

Switch Cabinet Key




21103 Switch Cabinet Keys For applications with all common switch cabinets and locking systems. Diecast Zinc

ermen sabinete and resiming systemer broader bine								
Item No.	mm	Inch	Pkg.	lbs.				
21103	76	3.0"	1	.22				



Wiha Inomic 1000Volt Insulated Pliers

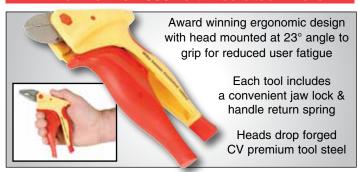



∕≃1000volt

32850 Inomic Combo Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, ∕-up to 1000 volt. Individually Tested. DIN ISO 5749 Precision machined forged head. Induction hardened for longest tool life. Cross hatched flat jaw & deep cut radius jaws for secure gripping of the work piece. Cutting edges are matched for precise cutting action. Award winning ergonomic design with head mounted at 23° angle to grip for reduced user fatigue. Palm side of grip has molded soft panel for added comfort in prolonged use.

J	•	•			-	
Item	→		Cutting Capacity		↓	
No.	mm	Inch	Copper AWG	Pkg.	lbs.	
32850	180	7.0	#6	1	.46	
32852	Inomic Long N	ose Plie	rs			
Item	←→		Cutting Capacity		← →	
No.	mm	Inch	Copper AWG	Pkg.	lbs.	
32852	160	6.3	#6	1	.43	
32854	Inomic Diagona	al Cutte	rs			
Item	←→		Cutting Capacity		↓	
No.	mm	Inch	Copper AWG	Pkg.	lbs.	
32854	160	6.3	#6	1	.41	



91230	Inomic Can	Inomic Canvas Holster							
Item	Width	Height		_					
No.	Size	Size	lbs.	pkg.					
91230	4.0 x	4.5	.05	1					

Proturn Insulated Electrician's Shears



Proturn Insulated Electrician's Shears Insulation meets VDE, ASTM F1505, EN/IEC 60900, CSA, NFPA 70E. OSHA Specifications. Made from stainless 420 grade steel

Item					
No.	mm	Inch	Pkg.	lbs.	
32951	160	6.3	1	.22	





Insulated Inch & Metric Folding Ruler

10.000Volt Tested/1000Volt Rated, Inch & Metric deep embossed scales. 10 folding sections. 30% fiberglass reinforced polyimide.

Item					<u></u>	
No.	Meter	Inch	Sections	Increments	lbs.	pkg.
61630	2	78"	10	1/16 & 1mm	.31	1

Insulated Water Pump Pliers



32954 Insulated Industrial Water Pump Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, $\stackrel{\triangle}{\sim}$ up to 1000 Volt. Individually Tested. 10 opening settings provides optimal adjustment to objects being gripped. Long life achieved through additional induction hardening of jaws to approx. 62HRC. Chromevanadium tool steel forgings, hardened and tempered. Black finish.

Item	←→	\leftarrow	Capac	ities		←
No.	mm	Inch	Round	Hex	Pkg.	wt.
32954	250	10.0	1 3/4	2	1	.90



Insulated Industrial Push Button Water Pump Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, Individually Tested. Extra narrow head for working in small spaces. Long life achieved through additional induction hardening of jaws to approx. 62HRC. Finger jam protection for safe operation at all settings. CVM tool steel forgings, hardened & tempered.

Item	←→	←→	Capac	ities		•••	
No.	mm	Inch	Round	Hex	Pkg.	wt.	
32956	250	10.0	1 3/4	2"	1	.90	

Insulated Industrial Pliers & Cutters

Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards



Insulated Long Nose Pliers With Cutters



329 Insulated Industrial Long Nose Pliers With Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \Leftrightarrow up to 1000 volt. Individually Tested. Drop-forged from special tool steel, cutters additionally induction hardened to approx. 64HRC, half-round jaws, serrated gripping surface.

Item	←→	\leftarrow	Cutting Capacity		•••
No.	mm	Inch	Copper AWG	Pkg.	wt.
32926	160	6.3	#10	1	.36
32923	200	8.0	#8	1	.46

Insulated Lineman's Pliers With Crimpers



32917 Insulated Industrial Lineman's Pliers "5-In-1" Professional Design. Insulation According to EN/IEC, ASTM, NFPA70E & CSA, A up to 1000 volt. Individually Tested. Deep cut radius conduit jaws for non-slip handling. Sure grip knurled & cross hatched flat jaw for non-slip griping. Extra long induction hardened precision matched cutting edges. Lower crimping jaw accepts most standard non-insulated electrical connectors. Large head with square anvil surface on each side. Premium CV tool steel forgings.

Item	→	\leftarrow	Cutting Capacity		- →
No.	mm	Inch	Copper AWG	Pkg.	wt.
32917	225	9.0	#4	1	.98

Insulated High Leverage Diagonal Cutters



32939 Insulated Industrial High Leverage Diagonal Cutters. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000 volt rated. Individually Tested. DIN ISO 5749 Semi-circular. Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. C70 special tool steel hardened and tempered to high quality. For soft, hard and piano wire, lay-on joint, optimized power transmission.

Item	→	→	Cutting Capacity		•••
No.	mm	Inch	Copper AWG	Pkg.	wt.
32939	200	8.0	#4	1	.66

Insulated NE Style Lineman's Pliers



Insulated NE Style Lineman's Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, degree to 1000 Volt. Individually Tested. Long life edge is achieved through additional induction hardening to approx. 64HRC. Special C70 tool steel hardened & tempered. Extra long cutting edge for flat and round cables.

Item	←→	\leftarrow		•••
No.	mm	Inch	Pkg.	wt.
32938	245	9.5	1	1.18

Insulated Diagonal Cutters



329 Insulated Industrial Diagonal Cutters. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000Volt Rated. Individually Tested. DIN ISO 5749 Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. Special tool steel hardened & tempered. For soft, medium hard wire & piano wire.

Item	←→	→	Cutting Capacity		•
No.	mm	Inch	Copper AWG	Pkg.	wt.
32933	160	6.3	#6	1	.64
32929	200	8.0	#6	1	.80

Insulated Combo Pliers With Dynamic Joint



Insulated Industrial High Leverage Combination Pliers.
Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E &
CSA, up to 1000 volt. Individually Tested. DIN ISO 5746
Extra long cutting edge for flat and round cables. Serrated laws. Cutting

Extra long cutting edge for flat and round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 64HRC. Use for gripping, pulling & holding as well as cutting wires and cables ranging in hardness from soft to extremely hard.

Item	\leftarrow	\leftarrow	Cutting Capacity		√ →
No.	mm	Inch	Copper AWG	Pkg.	wt.
32930	200	8.0	#4	1	.92

Insulated TriCut Strippers & Cutters



32944 Insulated Industrial TriCut Strippers & Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, aup to 1000 Volt. Individually Tested. Induction hardened cutters & strippers. Cuts cable, strips cable, strips wire leads. Unique 3 in 1 design provides faster combined cutting and stripping. Strips AWG sizes #10 & #14.

Item	\leftarrow	→			•••	
No.	mm	Inch	AWG	Pkg.	wt.	
32944	170	6.7	#6	1	.58	

Insulated Heavy Duty Cable Cutters



Insulated Industrial Serrated Edge Cable Cutters.
Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM
F-1505, NFPA70E and CSA, wup to 1000 Volt. Individually Tested.
Light, clean cutting ground precision cutting edges. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. For

Item	\leftarrow	\leftarrow				•••
No.	mm	Inch	Ø	mm2	Pkg.	lbs.
32927	200	8.0	20	60	1	.78

cutting of copper & aluminum cables without crushing.

Insulated Crimpers



Insulated Industrial Crimping Pliers. Insulation
According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505,
NFPA70E and CSA, up to 1000 Volt. Individually Tested.
Semi-circular profiles for secure connection between end sleeve and conductor. Long life is achieved through additional induction hardening to 64HRC. Crimps 6 - 30 AWG Connectors.

Item	←→	\leftarrow				•	
No.	mm	Inch	mm2	AWG	Pkg.	wt.	
32945	180	7.0	0.25-2.5	6-30	1	.64	

Insulated Stripping Pliers



32947 Insulated Industrial Stripping Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000Volt Rated.
Individually Tested. DIN ISO 5745 Made from Premium CV tool steel forgings. Induction hardened jaws and cutters to 64HRC. Spring & adjusting screw, for stripping up to Ø 5mm/#4 Awg.

Item	→	\leftarrow	Stripping Capacity		
No.	mm	Inch	Copper AWG	Pkg.	wt.
32947	160	6.3	#8 - #28	1	.46



Toll Free: (800) 494-6104

Insulated Industrial BiCut SuperCut



↑ 1000volt



- Double the power at the press of a button
- BiCut does the job of two pairs of pliers
- Up to 50% less hand strength required for cutting
- Cutting force doubled for extremely hard materials
- Easily switch between two strengths in one-handed operation


32936 Insulated Industrial BiCut SuperCut. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,

 ⇔ up to 1000 Volt. Individually Tested. Durable cutting is achieved. through additional inductive hardening to approx. 64HRC. Drop forged of high C70 steel. For cutting various materials from soft to extremely hard, such as nails, screws, bolts, wire cables, spring wires, chains, etc.

Item	+	←→		€**
No.	mm	Inch	Pkg.	lbs.
32936	200	8.0	1	.78

Insulated BiCut SuperCut & Screwdriver Set

Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards

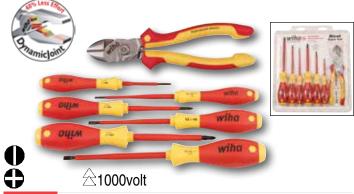

7 Pc. Insulated Industrial BiCut SuperCut & Screwdrivers

Ergonomia two component molded grins, 10,000 Valt tested

Ergonomic	two component moided grips. To,000 voit tested
Item No.	Insulated BiCut SuperCut:
32942	8.0"/200mm BiCut SuperCut
↓	Insulated Cushion Grip Screwdivers:
lbs.	Phillips: #0, #1, #2
1.86	Slotted: 3.0, 4.5, 5.5mm

Wiha Insulated Industrial Tool Sets



Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards

> Individually Tested

3 Pc. Insulated Industrial Pliers & Cutters

Item No. Insulated Pliers & Cutters

32981 8.0" Combo Pliers, 8.0" Long Pliers, 8.0" Diagonal Cutters



5 Pc. Insulated Industrial Diagonal Cutters & Screwdrivers 32983

Insulated Diagonal Cutters & Screwdrivers

32983 6.3"/160mm Diagonal Cutter

Insulated Drivers: Slotted: 3.0, 4.5mm • Phillips: #1, #2





Tools meet ASTM IEC, VDE, EN, NFPA & CSA standards

Individually Tested

↑ 1000Volt

6 Pc. Insulated Industrial Combo Pliers & Screwdrivers Item No.

Insulated Combination Pliers & Screwdrivers 32984 8.0" Combination Pliers & 8" Long Nose Pliers

Drivers: Slotted: 3.0, 4.5mm • Phillips: #2 • Square: #2

↓ Ibs. 2.06

Wiha Insulated Industrial Tool Sets








3 Pc. Insulated Industrial Pliers/Cutters & Voltage Detector

Item No. Insulated Pliers/Cutters & Cat. III Voltage Detector 32982 6.3" Long Pliers, 6.3" Diagonal Cutters

Voltage Detector with both light and sound alerts

₩ lbs. .98



Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards

Tool box set \pm 1000Volt in blow molded tray

9 Piece Insulated Industrial Pliers & Cutters Set

Insulated pliers & cutters set in a light weight tool box tray.

Item No.	9.0" Lineman's Pliers	8.0" High Lev. Combo Pliers
32999	6.3" Long Nose Pliers	8.0" Cable Cutters
	8.0" Long Nose Pliers	6.3" Stripping Pliers
lbs.	6.3" Diagonal Cutters	7.0" Crimping Pliers
6.34	8.0" Diagonal Cutters	

Wiha Insulated Tool Tray Sets



32989	28 Piece Insulated Industrial Pliers & Cutters Set							
Insulated p	Insulated pliers & cutters set in a light weight tool box tray.							
Item No.	Set Includes:	-						
32989	9.0" Lineman's Pliers	lbs.						
	8.0" High Leverage Combo Pliers	6.34						
	6.3" & 8.0" Long Nose Pliers							
	8.0" Cable Cutters							
	6.3" & 8.0" Diagonal Cutters							
	6.3" Stripping Pliers							
	7.0" Crimping Pliers							
	Slotted: 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0,	6.5, 8.0, 10.0mm						
	Phillips: #0, #1, #2, #3							
	Xeno Slotted/Phillips: #1, #2 & Square:	#1, #2						
	Cat. III Voltage Detector - Battery Oper	ated						

Notes:





Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards

↑ 1000Volt

32985 7 Pc. Insulated Industrial Pliers/Cutters & Screwdrivers

In Belt Pack Pouch

Insulated Pliers/Cutters & Screwdrivers 32985

8.0" Combo Pliers, 6.3" Long Nose, 6.3" Diagonal Cutters Insulated Drivers: Slotted: 3.0, 4.5mm • Phillips: #1, #2



Wiha Insulated Industrial Tool Sets

In Roll Out Pouch



 \pm 1000Volt



11 Pc. Pliers & Screwdriver Set. Insulation According to VDE 0682/part 201, DIN EN 60900, EN/IEC 60900, ASTM F-1505, NFPA70E, up to 1000 volt. Individually Tested. In Roll Out Pouch

Set Includes: **↓** lbs. 3.62 Item# 32986 6.3" Long Nose Pliers 6.3" Diagonal Cutters 8.0" Combination Pliers 6.3" Stripping Pliers

Insulated Slotted: 3.0, 4.5, 5.5mm

Insulated Phillips: #1, #2 Insulated Square: #1, #2

In Roll Out Pouch



 \pm 1000Volt

8 Pc. Pliers & Cutters Set. Insulation According to VDE 0682/part 201, DIN EN 60900, EN/IEC 60900, ASTM F-1505, NFPA70E, \Leftrightarrow up to 1000 volt. Individually Tested. In Roll Out Pouch

Item# 32987 Set Includes: **↓** lbs. 5.52 6.3" Long Nose Pliers 6.3" Diagonal Cutters 8.0" Long Nose Pliers 8.0" H.D. Diagonal Cutters 9.0" Lineman's w/Cutters 6.3" Stripping Pliers

8.0" Cable Cutters 7.0" Crimpers



32988 22 Pc. Pliers & Cutters Set. Insulation According to VDE 0682/part 201, DIN EN 60900, EN/IEC 60900, ASTM F-1505, NFPA70E,

A up to 1000 volt. Individually Tested. In Roll Out Pouches

.... lbs. 5.74 Item# 32988 Set Includes: 8.0" Long Nose Pliers 6.3" Diagonal Cutters 9.0" Lineman's w/Cutters 8.0" H.D. Diagonal Cutters 8.0" Cable Cutters 6.3" Stripping Pliers

7.0" Crimping Pliers

15 Pc. SlimLine Blade Set includes: Insulated SlimLine Blade Holder Slotted: 3.0, 4.0, 5.5, 6.5 Phillips: #1, #2 Xeno: #1, #2

TORX*: T8, T10, T15, T20 Square: #1, #2



22 Pc. Pliers & Driver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,

to 1000 volt. Individually Tested. In molded tool box Set Includes:

→ Ibs. 8.70 Item# 32973 9.0" Linemans Pliers W/Cutters 8.0" Long Nose Pliers W/Cutter 8.0" Diagonal Cutters 50mm Cable Stripping Knife Insulated Slim Phillips: #1, 2 Insulated Slim Slotted: 3.5, 4.5mm Insulated Slim Xeno: #1, 2 Insulated Slim Square: #1, 2 Insulated T-handle Hex Inch: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" Insulated Inch Nut Drivers: 3/8, 7/16, 1/4, 5/16"



Now in canvas tool bag

 \pm 1000Volt

32390 11 Pc. Pliers & Driver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,

tup to 1000 volt. Individually Tested. In canvas tool bag

Item# 32390 Set Includes: • • lbs. 6.30

8.0" Linemans Pliers 6.3" Long Nose Pliers W/Cutter

8.0" Long Nose Pliers W/Cutter 6.3" Diagonal Cutter

8.0" High Leverage Cutter

Insulated Phillips: #0, 1, 2 Insulated Slotted: 3.0, 4.5, 6.5mm



1000Volt

32399 10 Pc. Pliers & Driver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 volt. Individually Tested. In canvas zipper pouch Set Includes:

→ lbs. 5.74 Item# 32399 8.0" Long Nose Pliers W/Cutter 8.0" Linemans Pliers 8.0" Diagonal Cutter 6.3" Wire Stripper

10.0" Adjustable Pliers

Insulated Phillips: #1, 2 Insulated Slotted: 3.0, 4.5, 6.5mm





No Hassle Guarantee

Wiha branded tools are regarded as the most durable, best designed and highly innovative products around. Our tools are used by demanding professional tradespeople and tool aficionados alike. They are meant to be used and utilized often. However, if you are not happy for any reason return them within 12 months of purchase with proof of purchase and we will **Repair** or **Replace**.

Rest assured, if for some reason there is a defect in material or workmanship we will replace your tool free of charge for as long as you own the tool.

Failures due to misuse, abuse or normal wear and tear are not covered by this guarantee. We stand by our products with what we believe is the best **No Hassle Guarantee** in the industry.

Exclusions

Wiha Tools has the right to exclude Bits, Tweezers and Ceramic Screwdrivers. These products are either consumable or wear easily.

All torque tools are designed for 5,000 cycles or 1 year (whichever comes first). If a tool becomes out of specification within that period Wiha Tools will **Repair** or **Replace**. Visit www.wihatools.com to learn more about our Torque Control Service Program.

Legal

Some areas do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This guarantee gives you specific rights, and you may also have other rights, which vary, from state to state, province to province, or country to country.

This **No Hassle Guarantee** is the sole and exclusive guarantee for the Willi Hahn Corporation dba Wiha Tools. No employee, agent, dealer, or other person is authorized to alter this guarantee or make any other guarantees on behalf of Wiha Tools.

Willi Hahn Corporation USA Attn: No Hassle Guarantee 1348 Dundas Circle Monticello, MN 55362 800-494-6104



Numerical Index by Item Number

Item No.	Page								
10250	37	20022	4	21094	6	28391	18	31391	9
11950	13	20024	4	21095	6	28392	18	31394	10
11960	14	20027	4	21096	6	28393	17	31395	10
11975	14	20030	4	21103	38	28394	17	31425	10
11980	14	20032	4	21105	38	28395	17	31428	10
12326	13	20091	4	21208	5	28396	17	31429	10
12327	11	20093	4	21210	5	28398	18	31430	10
12851	10	20131	4	21212	5	28399	18	31431	10
12852	11	20133	4	21213	5	28724	17	31432	10
12853	13	20135	4	21214	5	28726	17	31433	10
12854	10	20136	4	21217	5	28727	17	31434	10
12855	10	20137	4	21219	5	28734	17	31435	10
12856	11	20138	4	21290	5	28736	17	31436	10
12857	11	20140	4	21325	5	28738	17	31437	10
12858	13	20140	4	21327	5	28740	16	31438	10
12859	13	20142	4	21329	5	28740	16	31439	10
13650	8	20144	4	21331	5	28742	16	31450	9
13651	8	20145	4	21333	5	28750	16	31460	9
13652	8	20146	4	21335	5	28751	16	31491	11
13653	8	20147	4	21391	5	28752	16	31493	11
13654	8	20148	4	25500	25	28791	16	31495	11
13655	8	20149	4	25511	25	28792	16	31496	11
13656	8	20151	4	28301	18	29006	10	31506	10
13657	8	20154	4	28302		29009	11	31507	10
13658	8	20190	4	28304	18	29012	13	31508	10
13659	8	20192	4	28307	19	29240	13	31509	10
13662	8	20194	5	28308	19	29250	13	31510	10
13663	8	20196	5	28309	19	30114	16	31511	10
13664	8	21008	6	28310	19	30138	16	31512	10
13665	8	21009	6	28312	19	30152	16	31513	10
13666	8	21010	6	28315	19	30190	16	31514	10
13667	8	21011	6	28317	19	30192	16	31515	10
13668	8	21012	6	28319	19	30700	25	31516	10
13669	8	21013	6	28320	19	30701	25	31517	10
13670	8	21014	6	28321	19	30711	25	31518	10
13671	8	21015	6	28327	19	30712	25	31519	10
13672	8	21017	6	28329	19	30746	20	31520	10
13673	8	21019	6	28330	19	30747	20	31521	10
13690	8	21020	6	28331	19	30770	21	31522	10
13691	8	21022	6	28332	19	31326	9	31524	10
13693	8	21024	6	28333	19	31327	9	31590	11
13694	8	21027	6	28334	19	31328	9	31592	11
15000	7	21030	6	28335	19	31329	9	31595	11
15003	7	21032	6	28336	19	31330	9	31608	12
15050	7	21040	6	28337	19	31331	9	31609	12
19767	13	21042	6	28338	19	31332	9	31610	12
20006	4	21044	6	28339	19	31333	9	31611	12
20007	4	21046	6	28340	19	31334	9	31612	12
20008	4	21048	6	28341	19	31335	9	31613	12
20009	4	21050	6	28342	19	31336	9	31614	12
20010	4	21052	6	28343	19	31337	9	31615	12
20011	4	21054	6	28344	19	31338	9	31616	12
20012	4	21056	6	28346	19	31339	9	31617	12
20013	4	21057	6	28347	19	31340	9	31618	12
20014	4	21058	6	28350	17	31341	9	31619	12
20015	4	21060	6	28366	17	31342	9	31620	12
20016	4	21062	6	28367	17	31343	9	31621	12
20017	4	21064	6	28368	17	31344	9	31622	12
20018	4	21066	6	28369	17	31345	9	31623	12
20019	4	21068	6	28371	17	31350	9	31624	12
20020	4	21093	6	28390	18	31390	9	31626	12



	_				_		_		Ita NI	D
Item No.	Page		Item No.	Page						
31627	12	32046	20	32288	26	32835	37		32985	43
31628	12	32049	20	32291	26	32836	37		32986	44
31630	12	32052	20	32292	26	32837	35		32987	44
31632	12	32055	20	32293	26	32838	37		32988	44
31650	9	32058	20	32294	26	32841	36		32989	43
31691 31694	12 12	32079 32085	21	32296 32302	26 24	32850 32852	39 39		32990 32999	28 43
31703	12	32087	25	32302	24	32854	39		33441	15
31703	12	32088	20	32304	24	32856	34		33443	15
31705	12	32089	25	32305	24	32857	34		33445	15
31707	12	32090	22	32306	24	32858	34		33447	15
31708	12	32091	23	32308	24	32860	37		33449	15
31709	12	32092	23	32366	24	32861	37		33478	15
31710	12	32093	23	32390	44	32862	35		33481	15
31712	12	32094	23	32399	44	32863	35		33482	15
31713	12	32095	23	32400	25	32864	35		33483	15
31714	12	32100	22	32401	25	32865	34		33485	15
31715	12	32101	22	32402	25	32867	33		33486	15
31716	12	32102	22	32403	25	32868	33		33487	15
31718	12	32103	22	32505	24	32869	33		33490	15
31720	12	32104	22	32511	24	32870	38		33532	22
31722	12	32105	22	32512	20	32871	28		33632	15
31790	12	32106	20	32513	20	32872	28		33634	15
31792	12	32107	20	32514	20	32873	28		33637	15
31805	9	32108	20	32515	20	32874	31		33641	15
31807	9	32145	20	32516	24	32875	28		35811	24
31809	9	32146	20	32517	20	32876	30		35812	24
31811	9	32188	23	32518	20	32877	30		35844	20
31813	9	32189	21	32519	20	32878	31		35845	20
31815	9	32190	23	32521	24	32879	31		35890	24
31817	9	32192	23	32526	24	32886	28		35891	24
31830	9	32196	21	32531	24	32888	32		38006	27
31832	9	32197	21	32536	24	32889	33		38007	27
31834	9	32198	21	32541	24 24	32891	32		38025	27 27
31836 31838	9	32199 32206	25 26	32546 32551	24	32892 32894	32 32		38050 38051	27
31840	9	32209	26	32556	24	32895	32		40800	13
31842	9	32212	26	32561	24	32896	31		61630	39
31844	9	32215	26	32566	24	32899	33		75205	14
31890	9	32218	26	32590	24	32917	40		75210	14
32000	20	32221	26	32592	24	32923	40		75215	14
32001	20	32224	26	32596	21	32926	40		75220	14
32002	20	32227	26	32800	29	32927	41		75302	14
32003	20	32230	26	32801	29	32929	40		75304	14
32004	20	32233	26	32804	38	32930	41		76208	7
32005	22	32236	26	32806	38	32933	40		76210	7
32010	22	32238	26	32807	38	32936	42		76212	7
32012	22	32239	26	32808	38	32938	40		76215	7
32015	22	32240	26	32810	38	32939	40		76290	7
32017	22	32241	26	32814	36	32942	42		91230	39
32023	22	32255	26	32816	36	32944	41		91256	38
32024	22	32258	26	32818	36	32945	41			
32025	22	32261	26	32820	36	32947	41			
32026	22	32264	26	32821	36	32951	39			
32027	22	32267	26	32826	37	32954	39			
32028	22	32268	26	32828	37	32956	39			
32031	22	32270	26	32830	37	32973	44	-		
32034	22	32273	26	32831	36	32981	42			
32039	22	32276	26	32832	37	32982	43	<u> </u>	ron65 W	ARNING: This prod
32042	22	32278	26	32833	35	32983	42	could ex	pose you to	o Chrome 6, DEHP &
32045	22	32280	26	32834	37	32984	42	Phthalat	es. These	chemicals are known

oduct & Phthalates. These chemicals are known to the state of California to cause cancer. For more information go to P65warnings.ca.gov/








Insulation Test



Cold Impact Test



Material Integrity Test



Flame Resistance Test



Adhesion Test

Puncture Test

©2018 Willi Hahn Corporation

Subject to change without notice

®Torx is a registered trademark of Acument Intellectual Properties LLC.

(800) 494-6104 fax: (800) 494-7456 cservice@wihatools.com www.wihatools.com

Catalog Item No. 99919.wo



Wiha Quality Tools

1348 Dundas Circle Monticello, MN 55362 tel: 763.295.6591 fax: 763.295.6598

To:

Wiha Tools Canada Ltd.

www.wihatools.ca Brampton, ONT L6T 4X4 tel: 866.494.0096 or 763.295.6591 fax: 763.295.6598





99951.wo - Bits Catalog




99004.wo - Shop Tools Catalog



99914.wo - TORX Catalog



99002.wo - Screwdrivers Catalog



91330.wo - Tooling Catalog



99001.wo - TorqueControl Catalog



99934.wo - Hex Tools Catalog



99006.wo - Tech Tools Catalog



99945.wo - ESD Catalog



99977.wo - Pliers/Crimpers Catalog

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Wiha:

 $\underline{32800} \ \ \underline{31395} \ \ \underline{31496} \ \ \underline{19767} \ \ \underline{31595} \ \ \underline{28391} \ \ \underline{28791} \ \ \underline{21391} \ \ \underline{32877} \ \ \underline{28390} \ \ \underline{28792} \ \ \underline{32876} \ \ \underline{32188}$