

REV. 0

DCO 17483


COIL: @ 25°C  
 RESISTANCE 160 OHMS ±10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 6.4 VDC  
 MUST RELEASE 0.7 VDC

ENVIRONMENT:  
 VIBRATION 10 Hz TO 3000 Hz @ 20 g's  
 SHOCK 100 g's 6±1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES:

# CUSTOMER DATA SHEET

BLUE BEAD

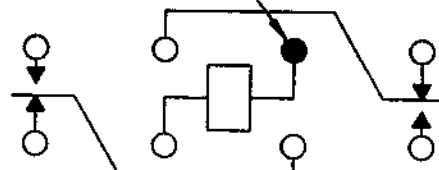

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2A 28 VDC RESISTIVE  
100,000 OPERATIONS

DR. DS 1/15/02 CK. TIG 01-15-02

**CII Technologies**  
 advanced control electronic solutions

CUST. C.I.I. STD

CUST. NO. \_\_\_\_\_ REV. \_\_\_\_\_

"HFW" RELAY

HFW1206G00

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HFW1206G00](#)