



PRODUCT NUMBER
SEE TABLE, SHEET 5

A

B

C

D

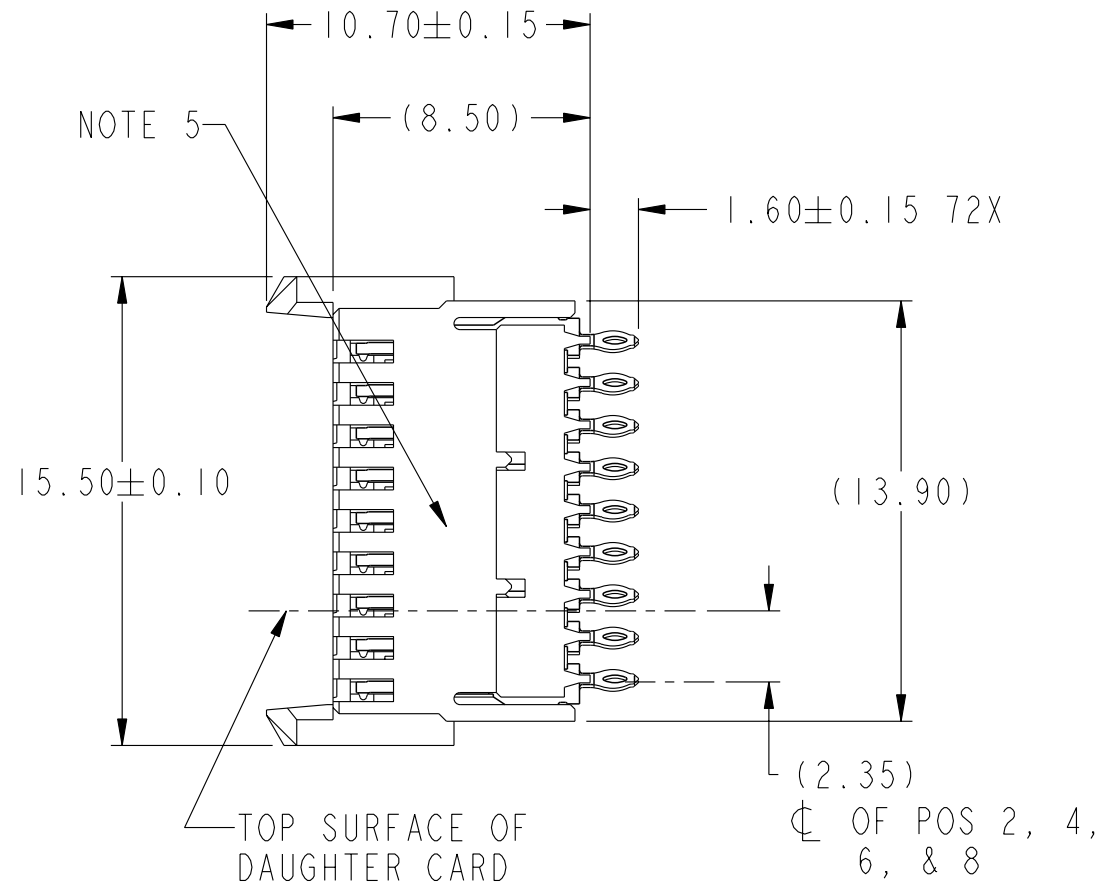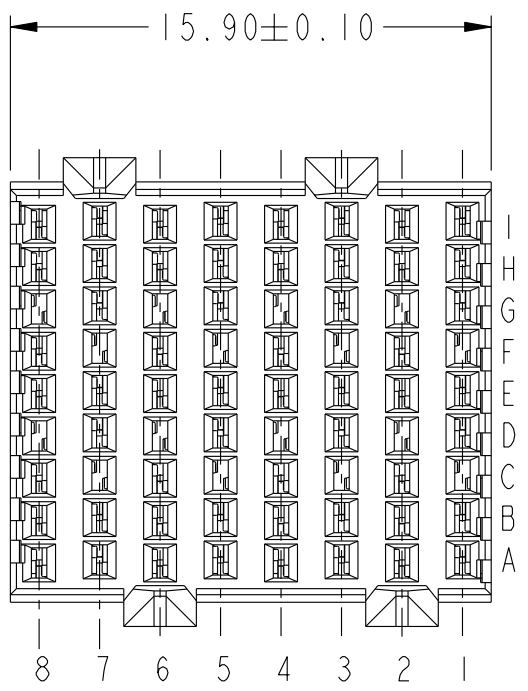

A

B

C

D




Copyright FCI.

REV F - 2006-04-17

www.fciconnect.com				surface - ASME Y14.5	tolerance std - ASME Y14.5	projection	MM
TOLERANCES UNLESS OTHERWISE SPECIFIED				ANGULAR	LINEAR	size A4	Scale 4:1
Dr	T. HOUTZ	2004-09-24	0°	±	ECN	***	
Eng	S. MINICH	2004-09-24	0°	±	Product family	AirMax VS	Spec ref
Chr	C. H. TAN	2007-02-08	0°	±	Product family	AirMax VS	Spec ref
Appr	JOEY NG	2007-02-08	Product family AirMax VS		Spec ref	RELEASED	
FCI logo				AirMax VS VERT RECPT ASSY		dwg no	10045271
				PRESS-FIT, 72 POS, 16MM		Rev.	B
				catalog no	-	CUSTOMER	sheet 1 of 5

rev	ecn no	dr	date
A	V05-0461	LRJ	2006-02-24
B	S07-0043	LS	2007-02-08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

ADJACENT HEADER WIDTHS	DIM A	DIM B
16MM/16MM	2.00	16.00
18MM/18MM	4.00	18.00
16MM/18MM	3.00	17.00

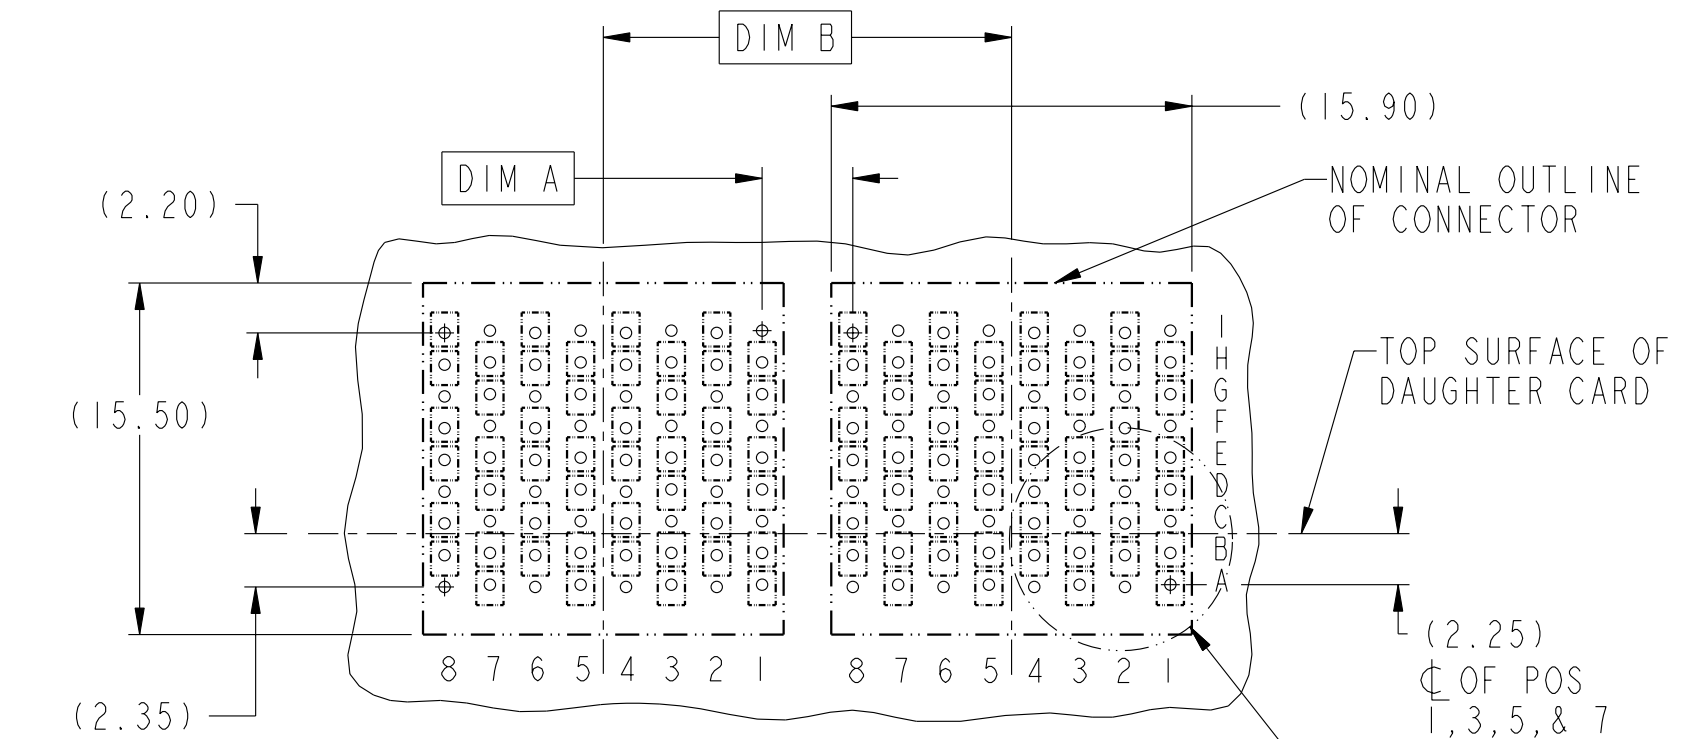

RECOMMENDED PCB LAYOUT
 FOR DIFFERENTIAL APPLICATIONS
 COMPONENT SIDE
 (TWO ADJACENT FOOTPRINTS SHOWN)
 NOTES 6 & 7




Copyright FCI.



title AirMax VS VERT RECPT ASSY PRESS-FIT, 72 POS, 16MM catalog no	-	dwg no 10045271	Rev. B

ADJACENT HEADER WIDTHS	DIM C	DIM D
16MM/16MM	2.00	16.00
18MM/18MM	4.00	18.00
16MM/18MM	3.00	17.00

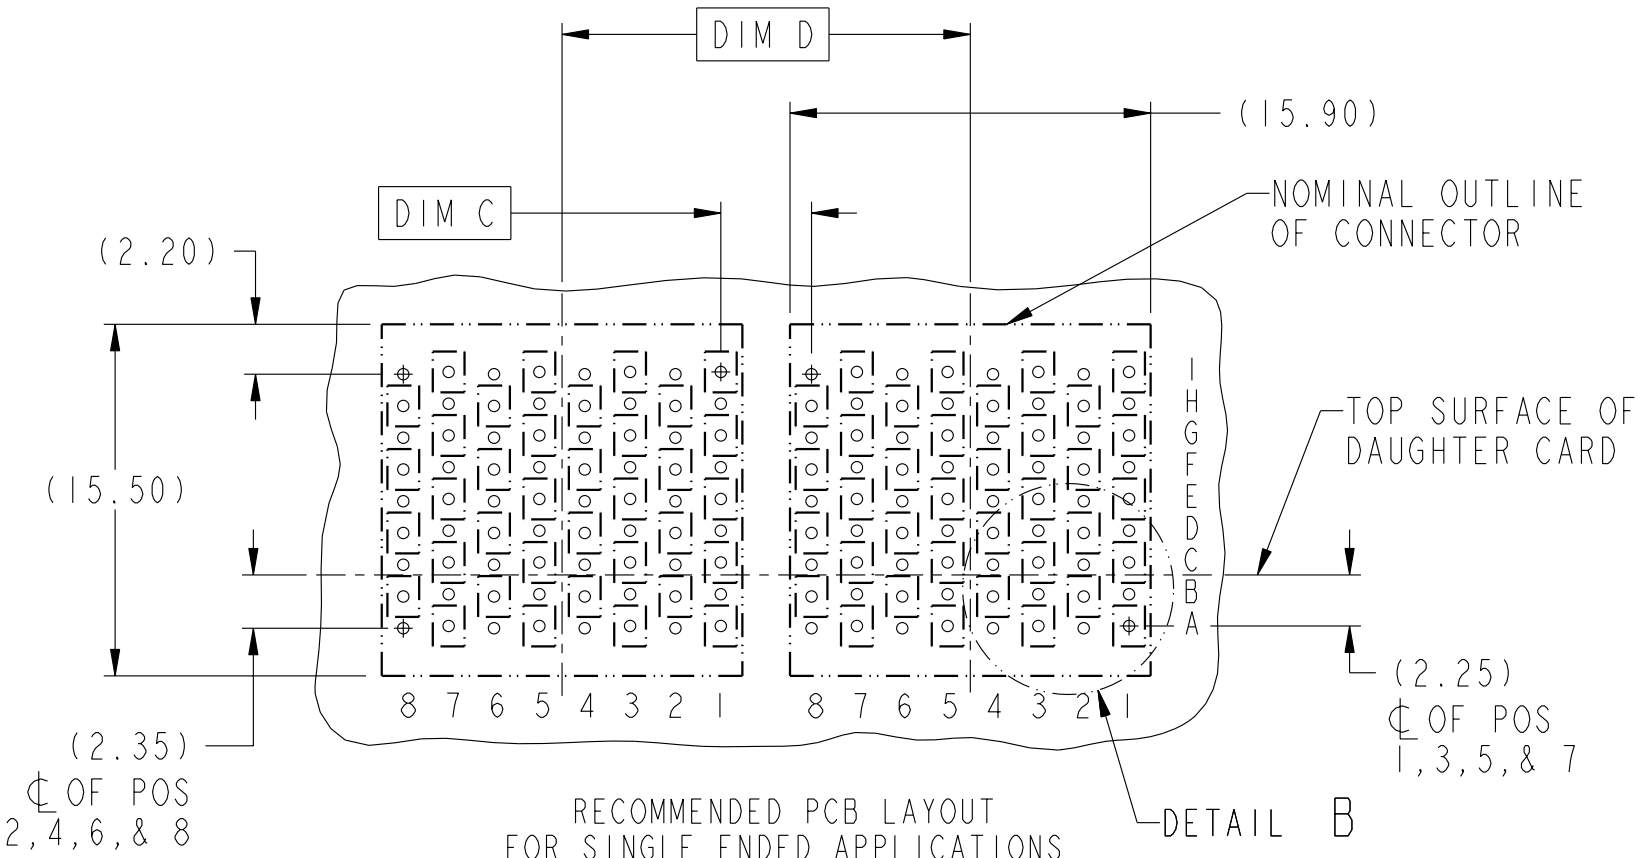

RECOMMENDED PCB LAYOUT
FOR SINGLE ENDED APPLICATIONS
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 6 & 7



Copyright FCI.

	title AirMax VS VERT RECPT ASSY PRESS-FIT, 72 POS, 16MM	dwg no 10045271	Rev. B
	catalog no -	CUSTOMER	sheet 3 of 5

REV F - 2006-04-17

1

2

3

4

A

B

C

D

A


B

C

D

2.00 TYP

ANTIPAD WIDTH =
2.0 - (TRACE + SPACE + TRACE)
TYP

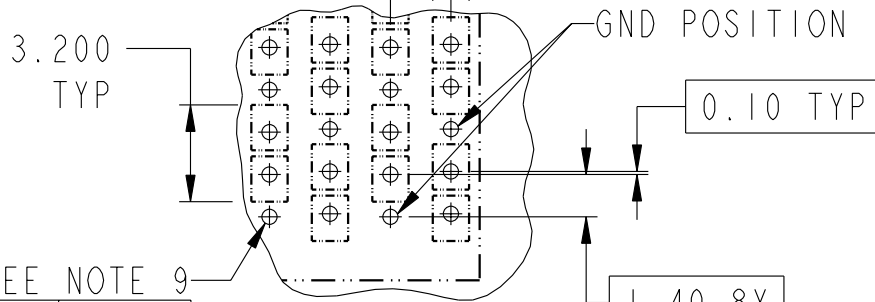

SEE NOTE 9


	0.10
--	------

ALL HOLES

DETAIL A
SCALE 4:1

2.00 TYP

ANTIPAD WIDTH =
2.0 - (TRACE + SPACE + TRACE)
TYP

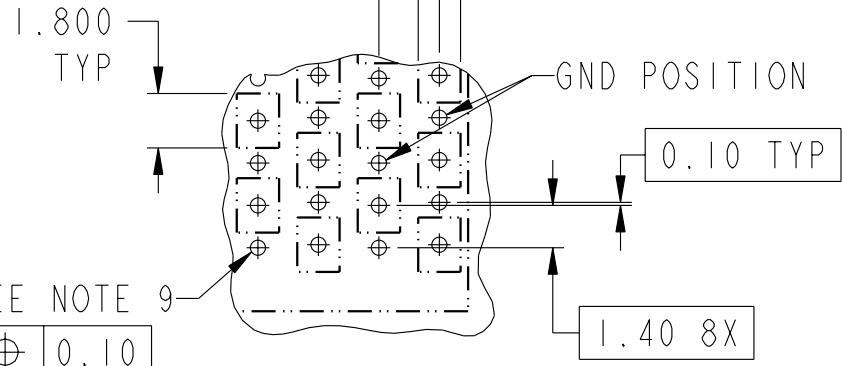

SEE NOTE 9

	0.10
--	------

ALL HOLES

DETAIL B
SCALE 4:1



AirMax VS VERT RECPT ASSY
PRESS-FIT, 72 POS, 16MM
catalog no -

dwg no 10045271
CUSTOMER

Rev. B

sheet 4 of 5




PART NUMBER	PRESS-FIT TAIL PLATING TYPE
10045271-101	TIN/LEAD ALLOY OVER NICKEL
10045271-101LF	TIN OVER NICKEL (LEAD FREE)

NOTES:

1. CONNECTOR MATERIALS:
HOUSING & RETAINER: HIGH TEMP THERMOPLASTIC, NATURAL, UL94V-0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
2. CONTACT PLATING:
SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-239, INCLUDING TELCORDIA GR-1217-CORE (November 1995) CENTRAL OFFICE TEST SEQUENCE.

PRESS-FIT TAILS: SEE TABLE
3. PRODUCT SPECIFICATION: GS-12-239
4. APPLICATION SPECIFICATION: GS-20-035
5. PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE
6. REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES RELATIVE TO SIGNAL MODULES
7. POSITIONS F OF ODD NUMBERED COLUMNS AND POSITIONS G OF EVEN NUMBERED COLUMNS CORRESPOND TO EARLY MATE HEADER PINS
8. THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR SYSTEM
9. REFER TO CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.
10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
12. PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.

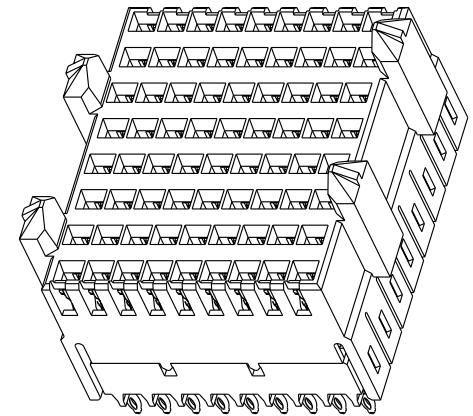

	title AirMax VS VERT RECPT ASSY PRESS-FIT, 72 POS, 16MM	dwg no 10045271	Rev. B
	catalog no -	CUSTOMER	sheet 5 of 5



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10045271-101LF](#)