


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		J	REVISED PER ECO-14-000066	30JUN2014	NK	MM

- 1 TRUE POSITION TOLERANCE OF THE POSTS TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.
- 4 FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL ALL OVER 0.00127 [.000050] NICKEL.
- 5 HIGH TEMPERATURE CONFIGURATION
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

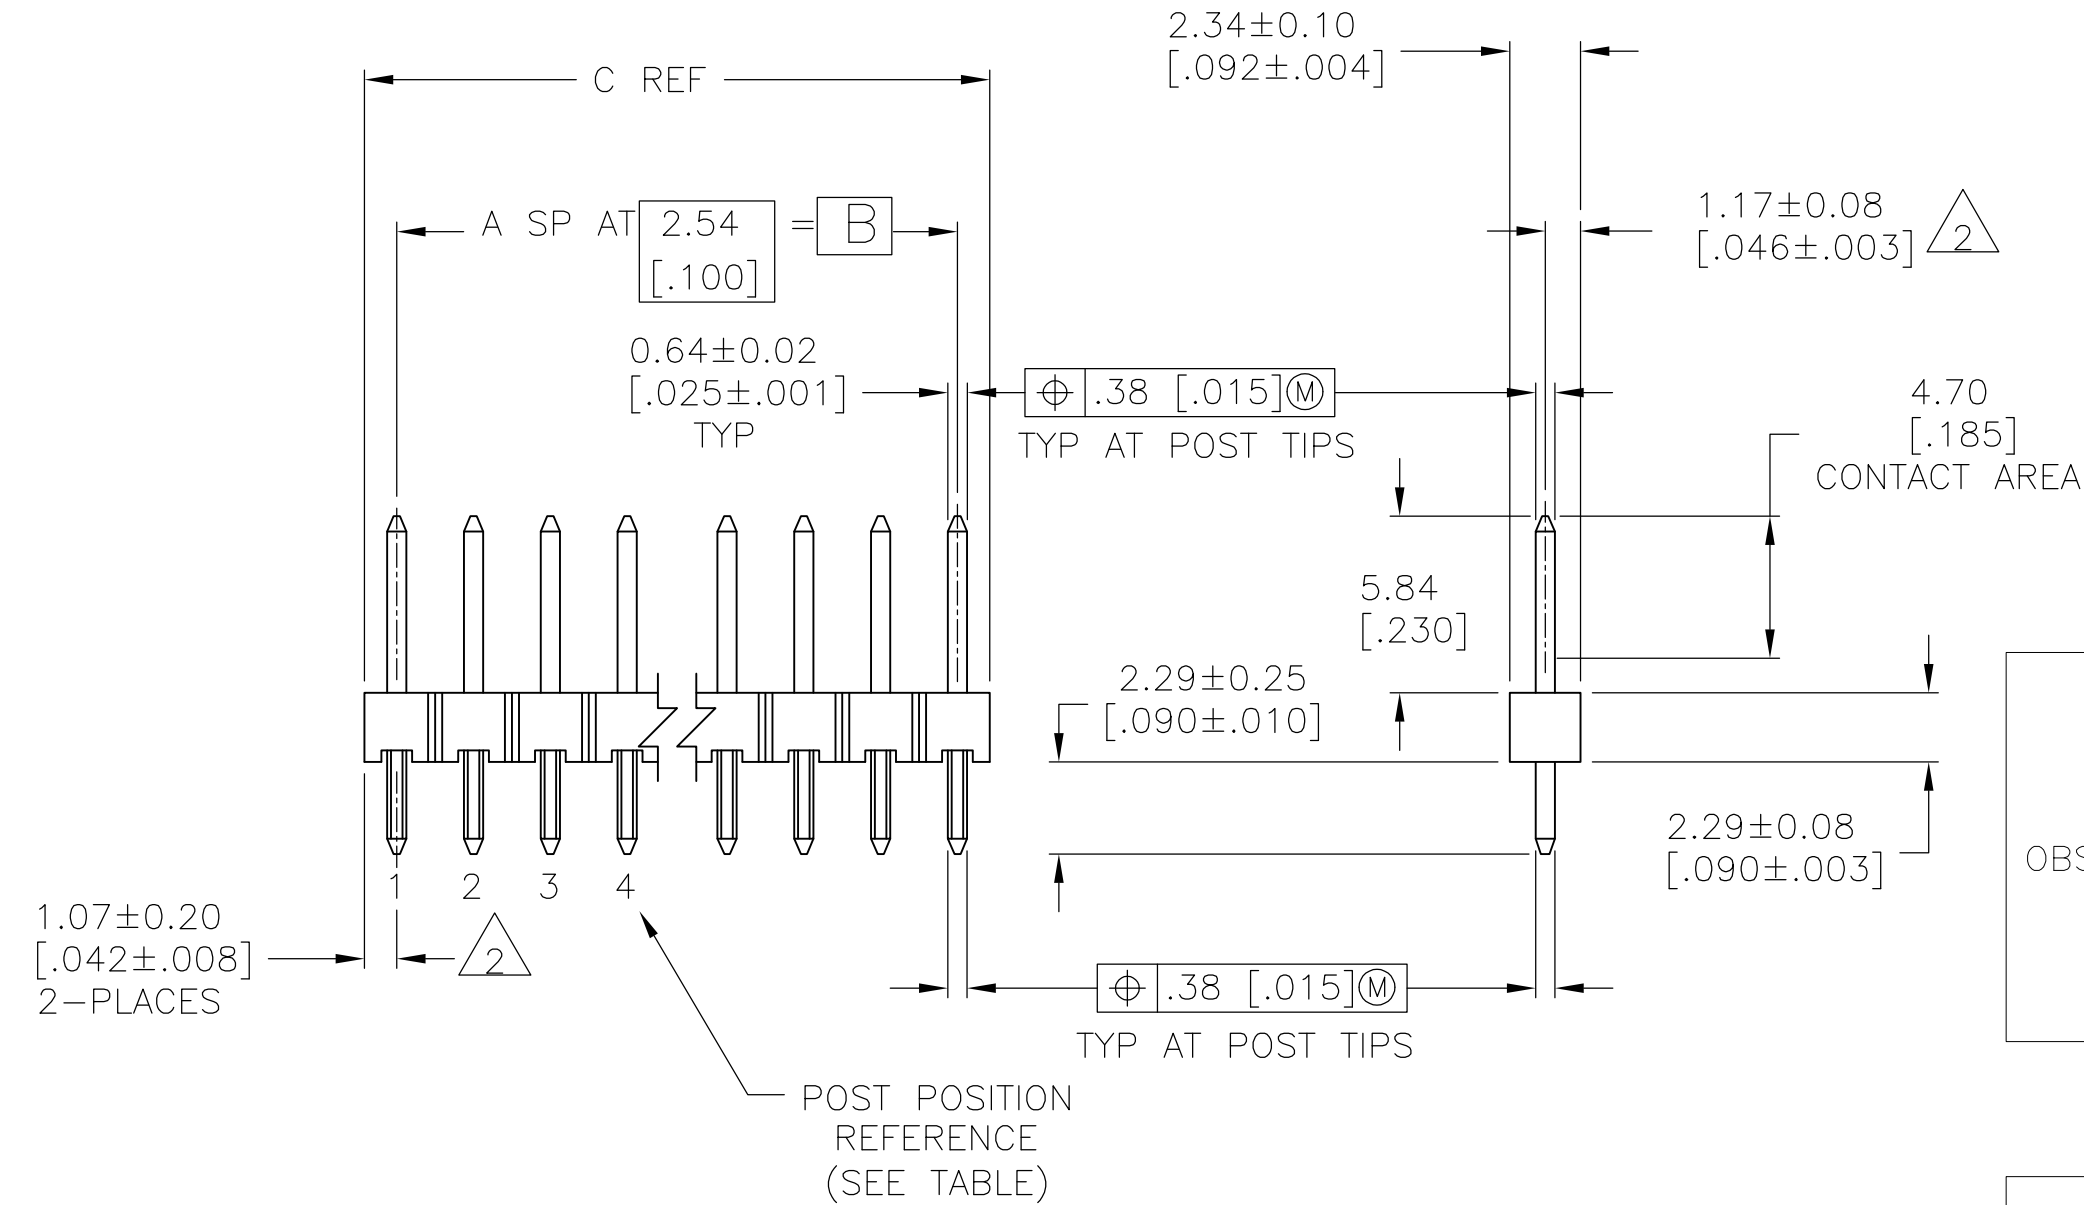

OBSOLETE	4	5	NONE	7.21 [.284]	5.08 [.200]	2	3	3	5-146225-3
	4	5	2	19.91 [.784]	17.78 [.700]	7	7	8	5-146225-2
	4	5	NONE	9.75 [.384]	7.62 [.300]	3	4	4	5-146225-1
	3		NONE	7.21 [.284]	5.08 [.200]	2	3	3	146225-3
OBSOLETE 6	3		2	19.91 [.784]	17.78 [.700]	7	7	8	146225-2
	3		NONE	9.75 [.384]	7.62 [.300]	3	4	4	146225-1
	PLATING	REMARKS	POST OMITTED	C	B	A	NO.OF ACTIVE POSN	NO. OF POSN	ASSEMBLY PART NUMBER

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
HOUSING : FLAME RETARDANT THERMOPLASTIC
COLOR : BLACK
POSTS : COPPER ALLOY

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.5[.02]
2 PLC ± 0.13[.005]
3 PLC ± 0.013[.0005]
4 PLC ± -
ANGLES ± -
FINISH SEE TABLE

DWN
T. HOFFMAN
3/6/95

CHK
G.DUBNICZKI
3/15/95

APVD
G.DUBNICZKI
3/15/95

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
HEADER ASSEMBLY, MOD II, BREAKAWAY,
SINGLE ROW, .100 , VERTICAL,
.025 SQ.POST, SELECT LOAD

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=146225

RESTRICTED TO
-

SCALE
4:1

SHEET
1 OF 1

REV
J

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[146225-3](#)