
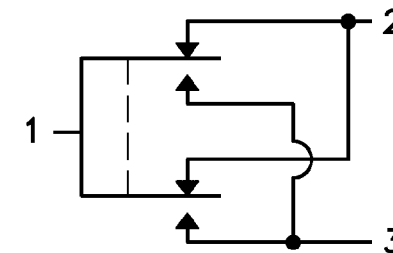
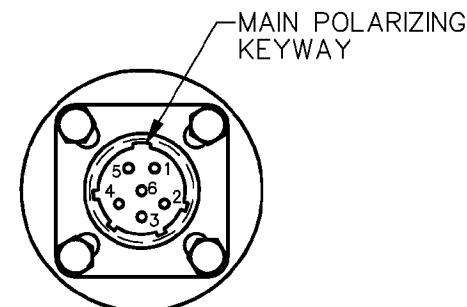
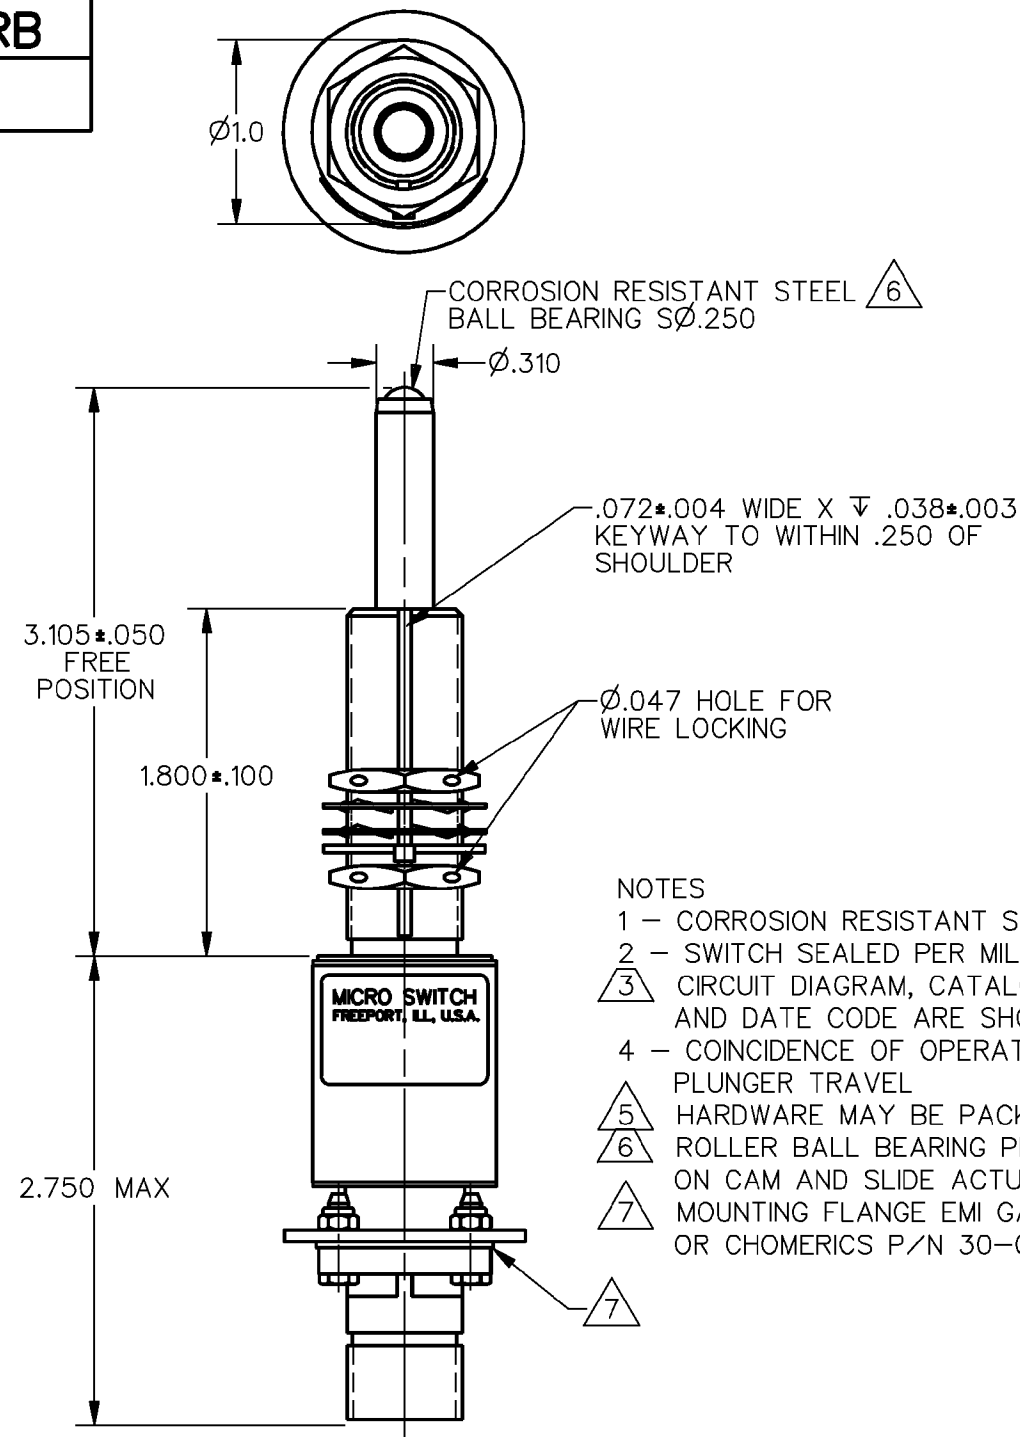


MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
2001EN3-RB

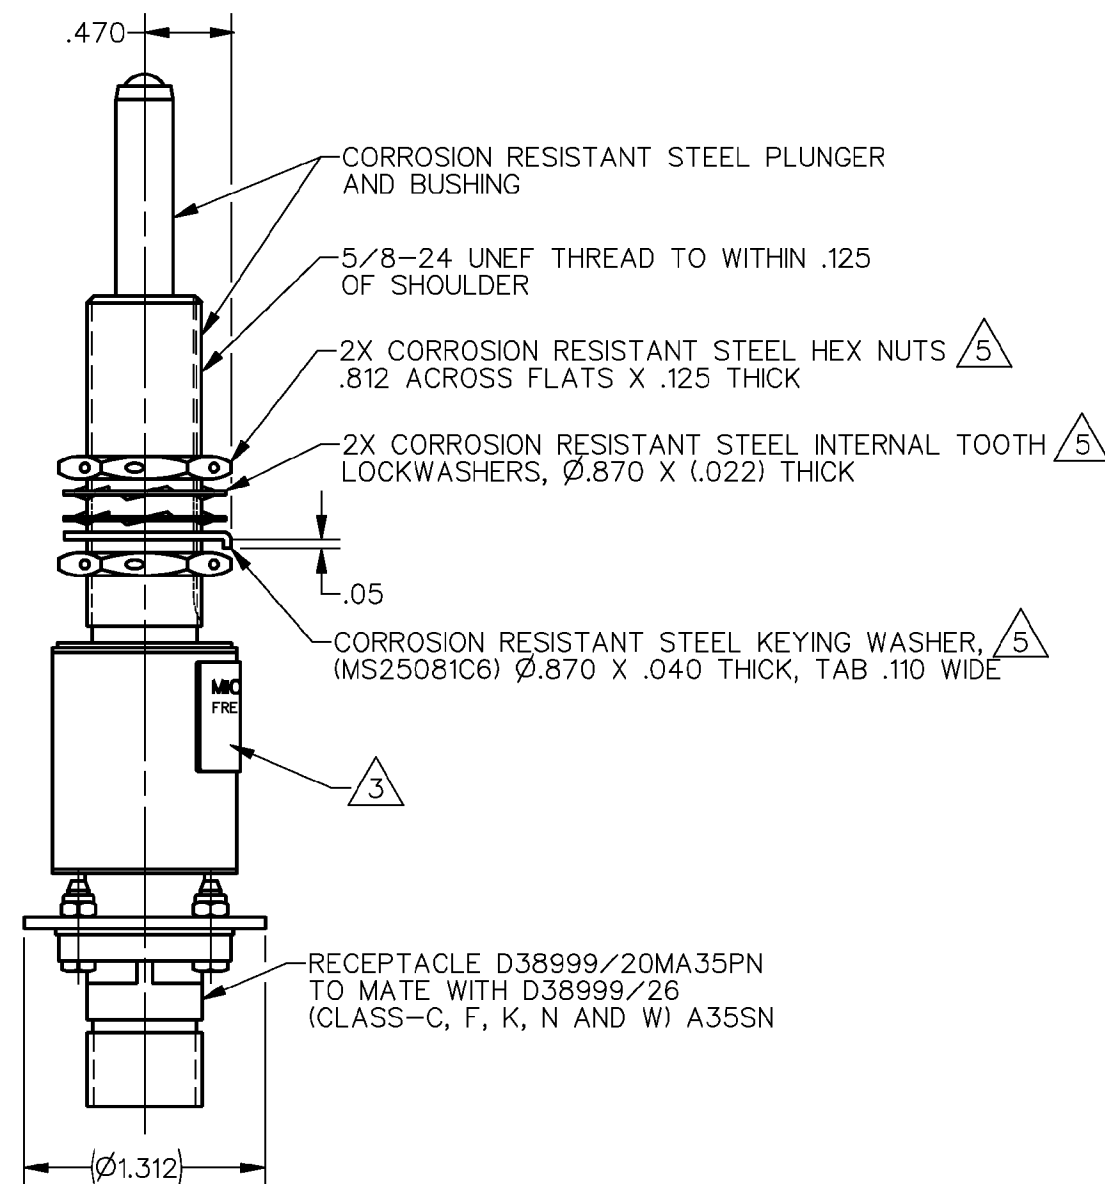

CIRCUIT DIAGRAM

CONNECTOR PIN-OUT

CONN PIN #	SWITCH CIRCUIT
1	COMMON (2)
2	N.C. (2)
3	N.O. (2)
4,5,6	NO CONNECTION


NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
- 3 - CIRCUIT DIAGRAM, CATALOG LISTING, FED MFG CODE AND DATE CODE ARE SHOWN ON NAMEPLATE
- 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
- 6 - ROLLER BALL BEARING PLUNGER FOR USE WITH 20° MAX RISE ON CAM AND SLIDE ACTUATION
- 7 - MOUNTING FLANGE EMI GASKET BMY P/N CMV10341-005 OR CHOMERICS P/N 30-Q1-C646-F6434

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE — — — — — 4-8 LB	CONTACT ARRANGEMENT 2X S P D T		
FULL OVERTRAVEL FORCE — — — — — 20 LB MAX			
RELEASE FORCE — — — — — 3 LB MIN	LOAD	28 VDC	
PRETRAVEL — — — — — .015-.040		SEA LEVEL	50,000 FT
DIFFERENTIAL TRAVEL — — — — — .020 MAX	RES	4	4
OVERTRAVEL — — — — — .900 MIN	IND	2	2
	MOTOR		

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE	(.0)	$\pm .03$
TWO PLACE	(.00)	$\pm .01$
THREE PLACE	(.000)	$\pm .003$
ANGLES		$\pm$

WEIGHT 8 OZ MAX

ANSI Y14.5M-1982 APPLIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[2001EN3-RB](#)