


Feed-through header - FK-MPT 0,5/ 7-ICV-3,5 - 1905544

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB headers, nominal current: 3 A, rated voltage (III/2): 250 V, number of positions: 7, pitch: 3.5 mm, color: black, contact surface: Tin, mounting: THR soldering, The touch-protected basic strip, serves to accommodate the FK-MPT 0,5 PCB terminal block.

The figure shows a 15-position version

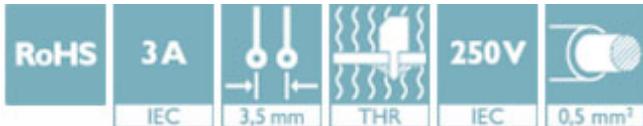

Key Commercial Data

Packing unit	50 pc
GTIN	 4 017918 179465
GTIN	4017918179465

Technical data

Dimensions

Length [l]	9.1 mm
Pitch	3.5 mm
Dimension a	21 mm
Height	8.8 mm
Length of the solder pin	3.4 mm
Pin spacing	3.50 mm
Length	9.1 mm

General

Range of articles	FK-MPT 0,5/..-ICV
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	250 V
Rated voltage (II/2)	250 V

Feed-through header - FK-MPT 0,5/ 7-ICV-3,5 - 1905544

Technical data

General

Connection in acc. with standard	EN-VDE
Nominal current I_N	3 A
Maximum load current	3 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	black
Number of positions	7

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1905544](#)