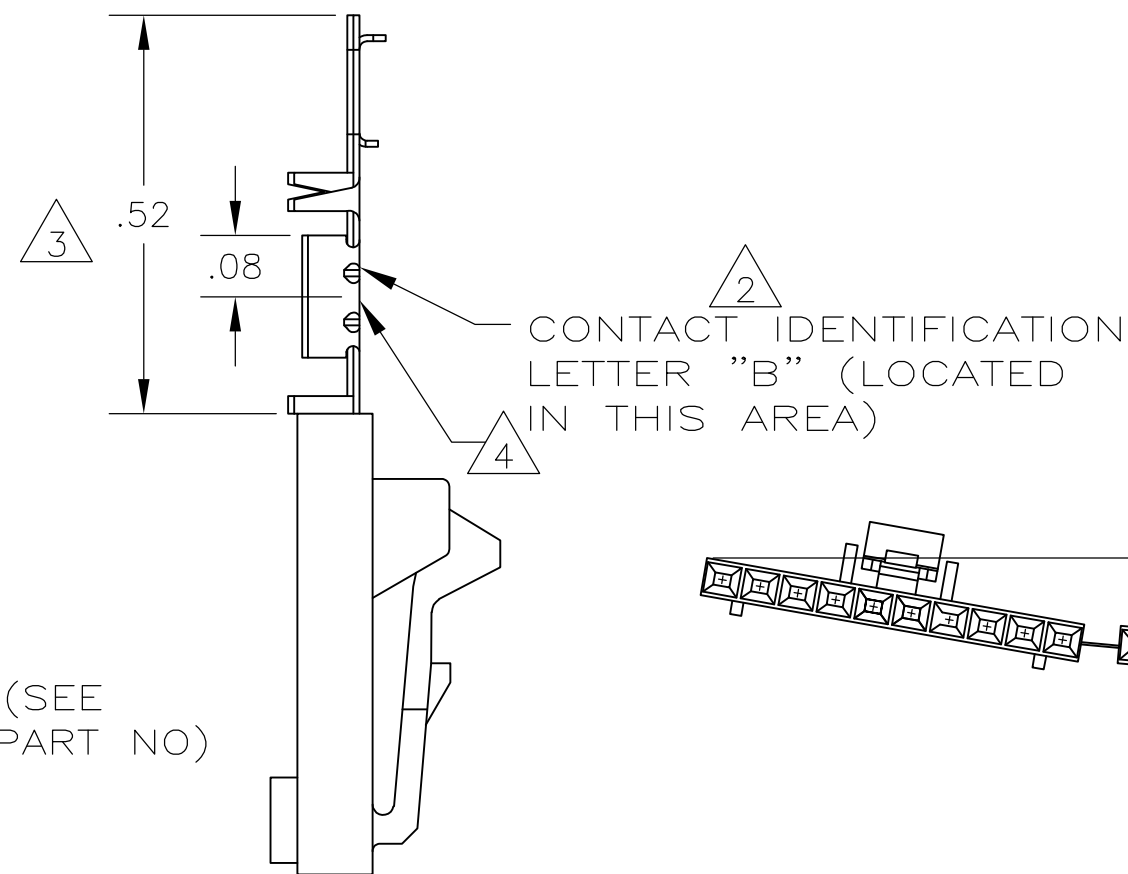

103956

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS.
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS.
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103645.
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP.  
ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 10 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 12 .000100-.000200 MATTE TIN OVER .000050 NICKEL.

|                                                                                       |  |                                                                                                                                |  |                                                                                                                      |  |  |  |              |                    |                        |
|---------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------|--|--|--|--------------|--------------------|------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWN<br>11-4-86<br>L A MAYER<br>CHK<br>11-12-86<br>P de Jong<br>APVD<br>11-12-86                                                |  |  TE Connectivity                |  |  |  |              |                    |                        |
| DIMENSIONS:<br>INCHES                                                                 |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br><br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± .02<br>3 PLC ± .005<br>4 PLC ± -<br>ANGLES ± - |  | NAME<br><br>RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, LATCHED & POLARIZED, FOR #22-#26 AWG WIRE SIZE, STRIP FORM |  |  |  |              |                    |                        |
|  |  | PRODUCT SPEC<br>108-25034<br>APPLICATION SPEC<br>114-25026                                                                     |  |                                                                                                                      |  |  |  |              |                    |                        |
| MATERIAL                                                                              |  | WEIGHT<br>-                                                                                                                    |  |                                                                                                                      |  |  |  | SIZE<br>A2   | CAGE CODE<br>00779 | DRAWING NO<br>C-103956 |
| HOUSING:                                                                              |  | FINISH<br>SEE TABLE                                                                                                            |  | CUSTOMER DRAWING                                                                                                     |  |  |  | SCALE<br>4:1 | SHEET<br>1 of 1    | REV<br>P1              |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103956-5](#)