

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		R2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

D

C

B


A

D




C

B


A

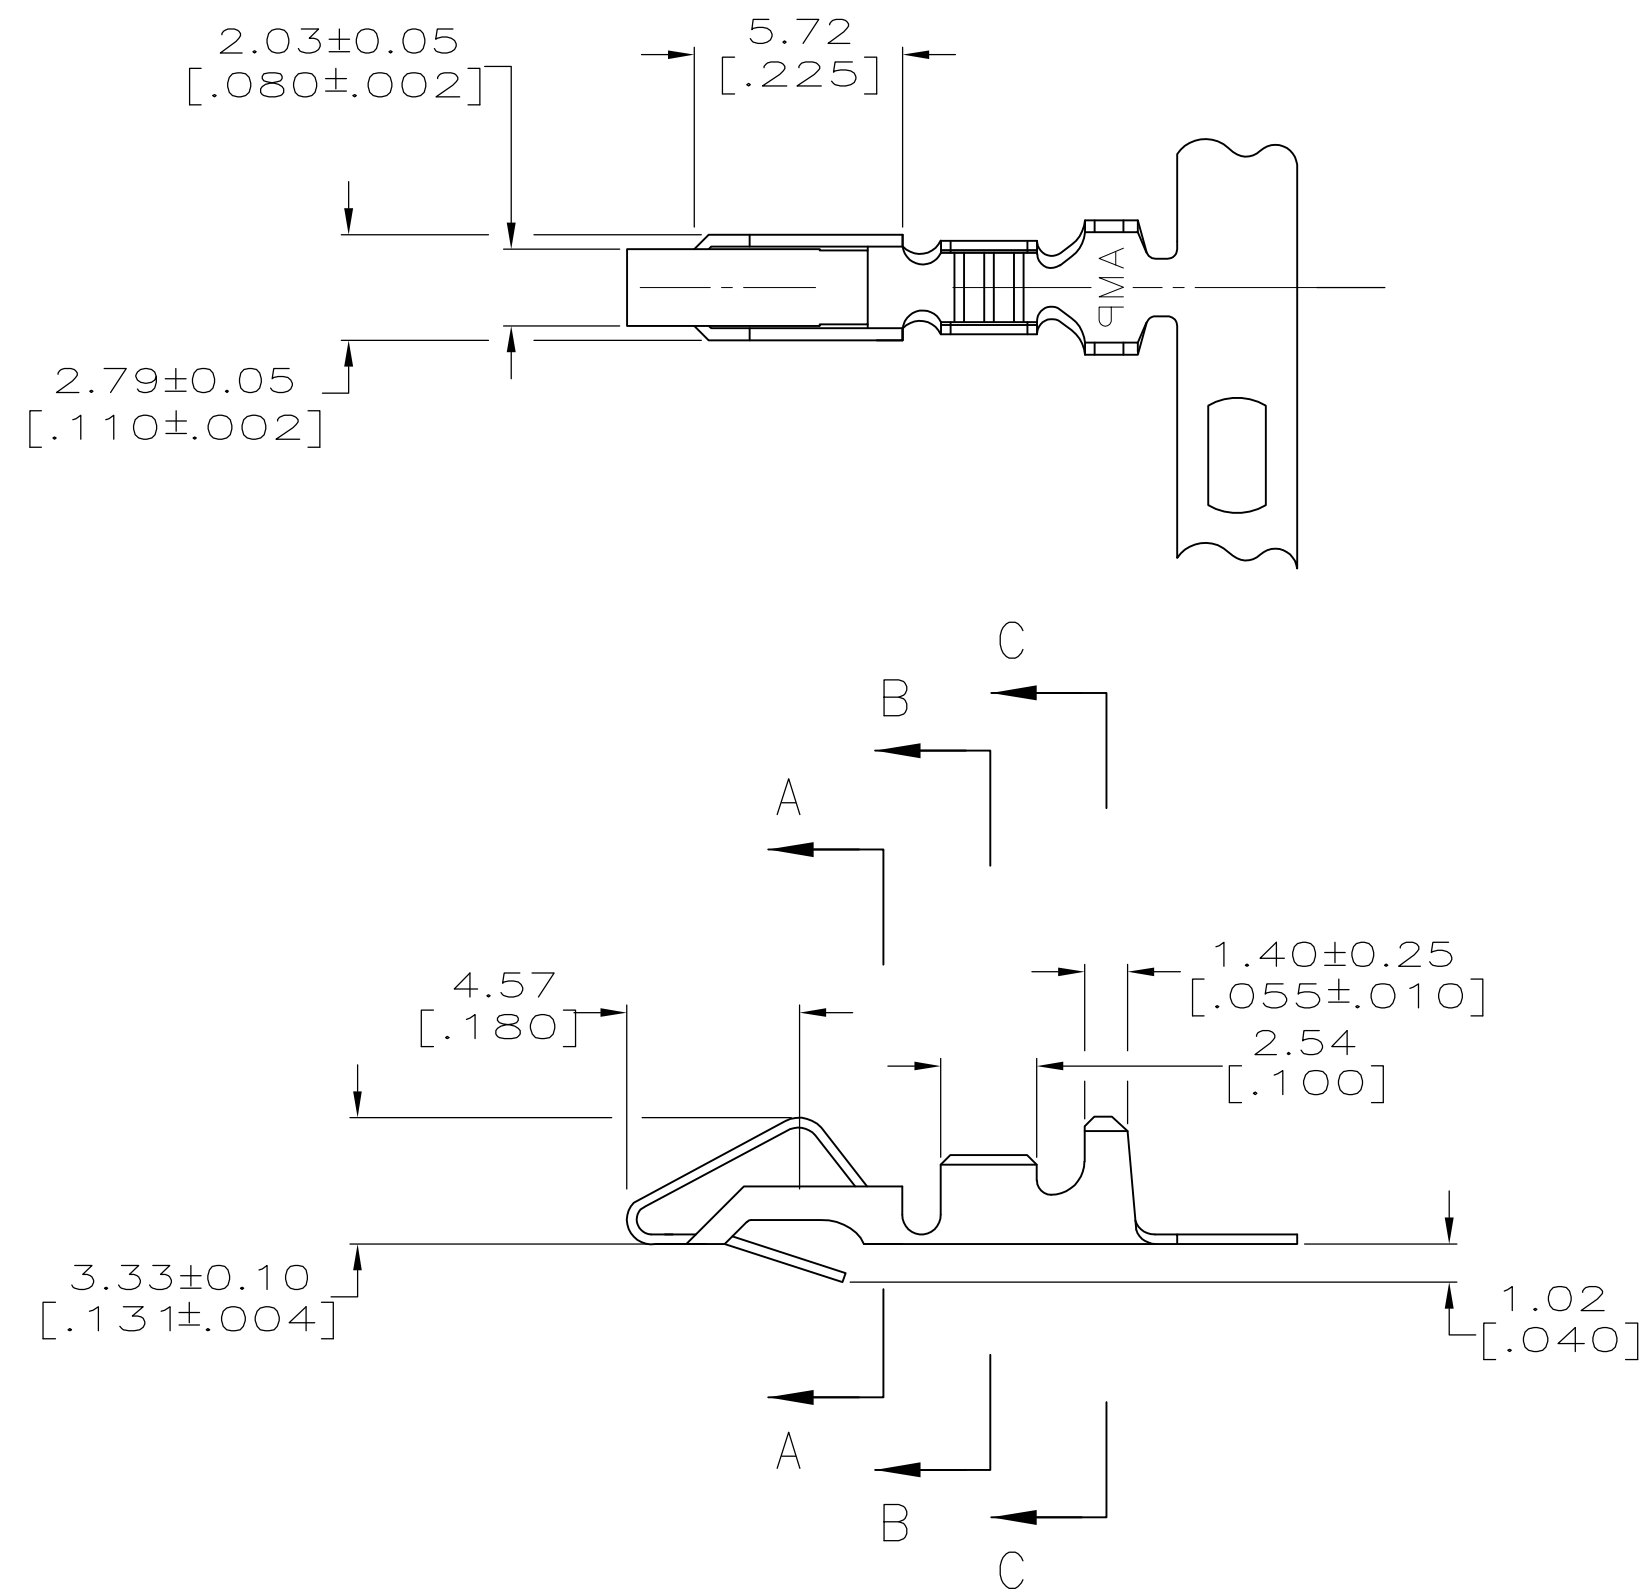

- 1 0.00203 [.000080] MIN BRIGHT TIN-LEAD OVER 0.00127 [.000050] MIN NICKEL.
- 2 0.00330 [.000130] MAX PRE-TIN.
- 3 0.00013 [.000005] GOLD OVER 0.00127 [.000050] MIN NICKEL ALL OVER AND 0.00076 [.000030] MIN GOLD ON CONTACT AREA.
- 4 WIRE RANGE: 0.2-0.9mm² (24-18 AWG). INSULATION RANGE: 2.79 [.110] DIA MAX.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 0.00013 [.000005] GOLD OVER 0.00127 [.000050] MIN NICKEL ALL OVER AND 0.00038 [.000015] MIN GOLD ON CONTACT AREA.
- 7 0.00203 [.000080] MIN BRIGHT TIN OVER 0.00127 [.000050] MIN NICKEL.

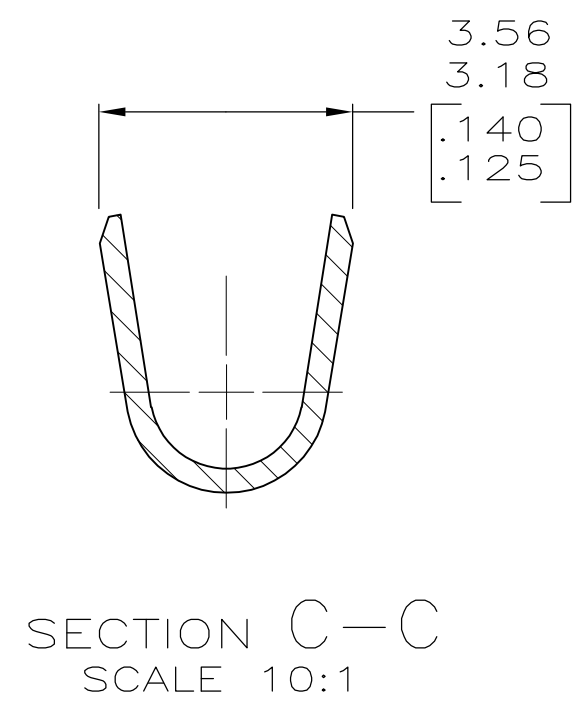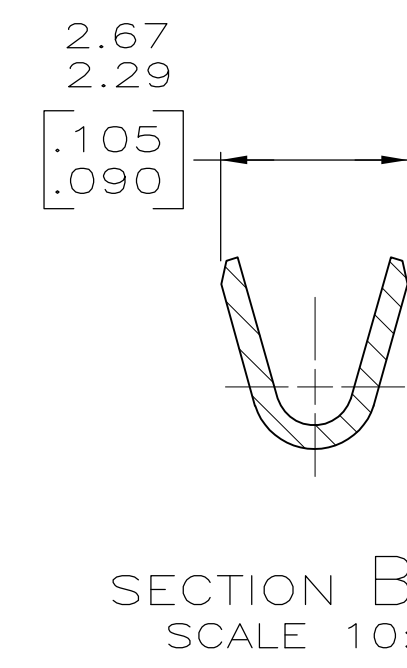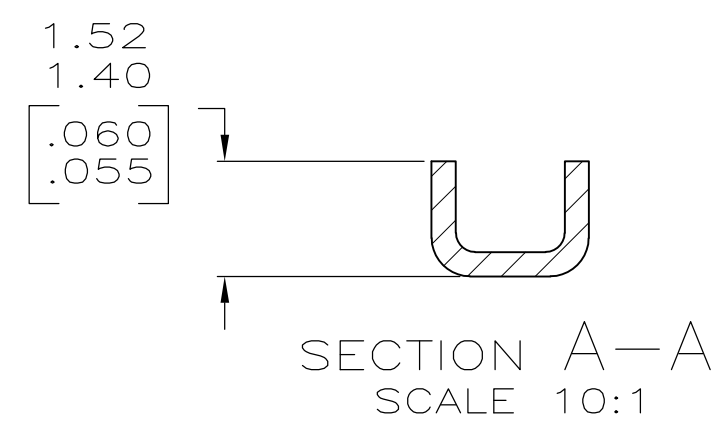

—	7	3-350980-1
—	6	350980-4
SEE 770258-1	3	350980-3
—	2	350980-2
SEE 640707-1	1	350980-1
LOOSE PIECE	FINISH	PART NO

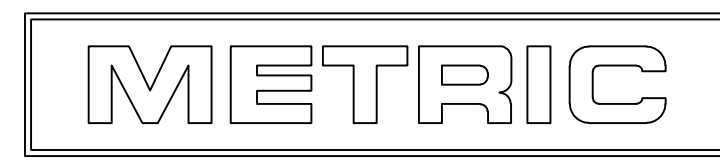

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN K. SALMON 11-2-92	TE Connectivity			
DIMENSIONS: INCHES			CHK R. SWING 11-2-92				
			APVD E. BEILES 11-2-92	NAME RECEPTACLE, SL-156			
			PRODUCT SPEC —				
TOLERANCES UNLESS OTHERWISE SPECIFIED:			APPLICATION SPEC —	SIZE A2			
MATERIAL 0.33 [.013] BRASS			WEIGHT —	CAGE CODE 00779	DRAWING NO C-350980	RESTRICTED TO —	
FINISH SEE TABLE			CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1	REV R2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350980-4](#)