
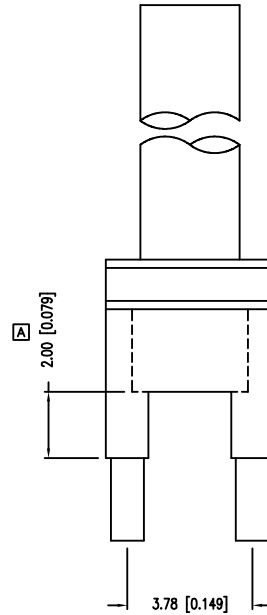
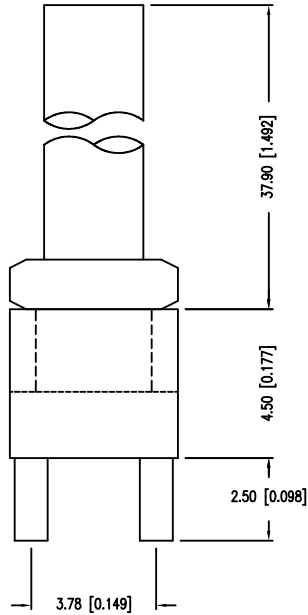





PART NUMBER	LPA-C011301S-37.9	REV.	C
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
10.11.10	E.C.N. #11664.		A
05.18.11	E.C.N. #11784.		B
05.12.16	ECN-Lumex201600008		C



NOTES:

1. MATERIAL: CLEAR POLYCARBONATE UL94V-0. (LIGHT PIPE)
2. MATERIAL: BLACK NORYL, UL94V-0. (HOLDER)
3. TEMP. RANGE -60°C TO +125°C.
4. RECOMMENDED LED: SML-LX0805xx SERIES.

PCB LAYOUT

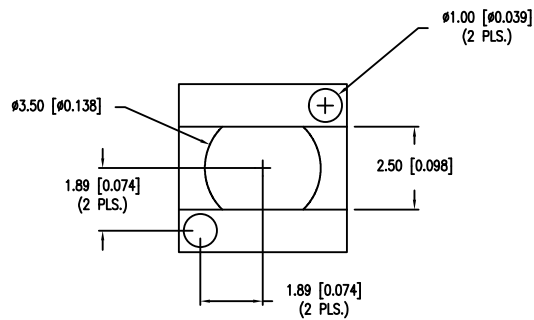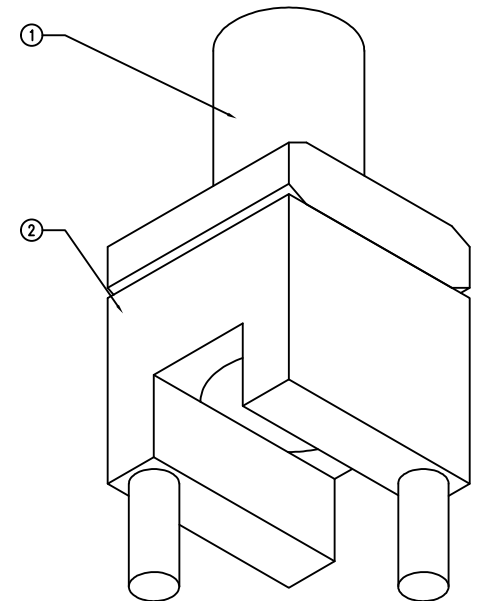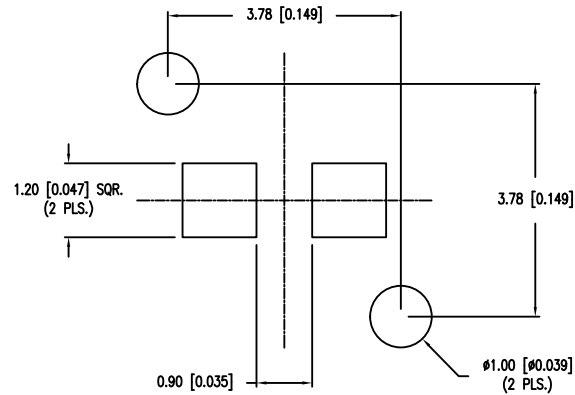

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= -DECIMAL PRECISION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumex:](#)

[LPA-C011301S-37.9](#)