

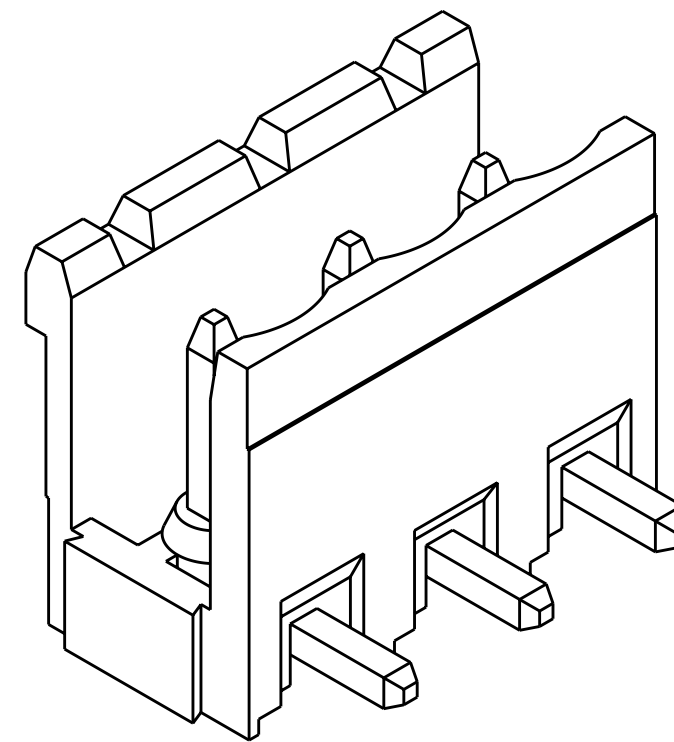
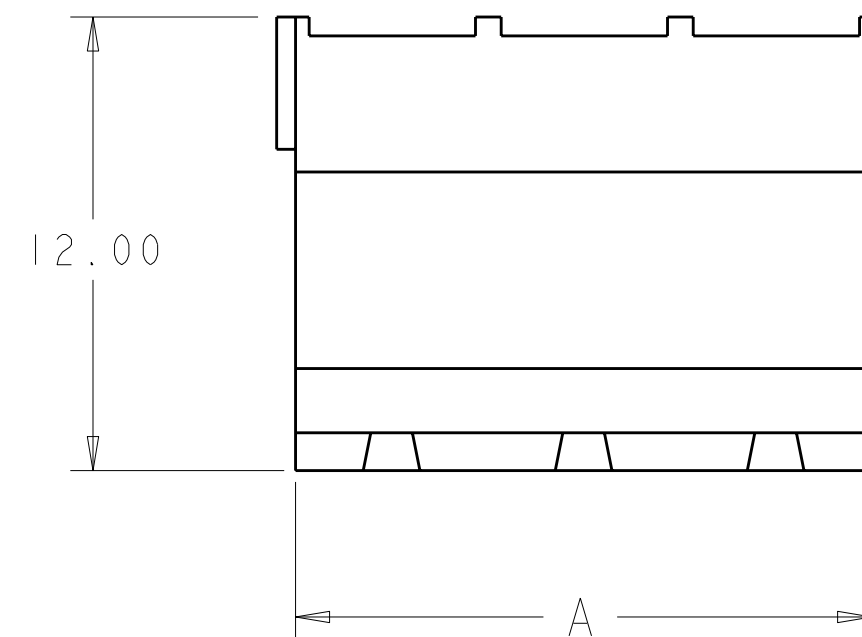


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			01	REVISED PER ECO-12-007711	26APR2012	KH	MS

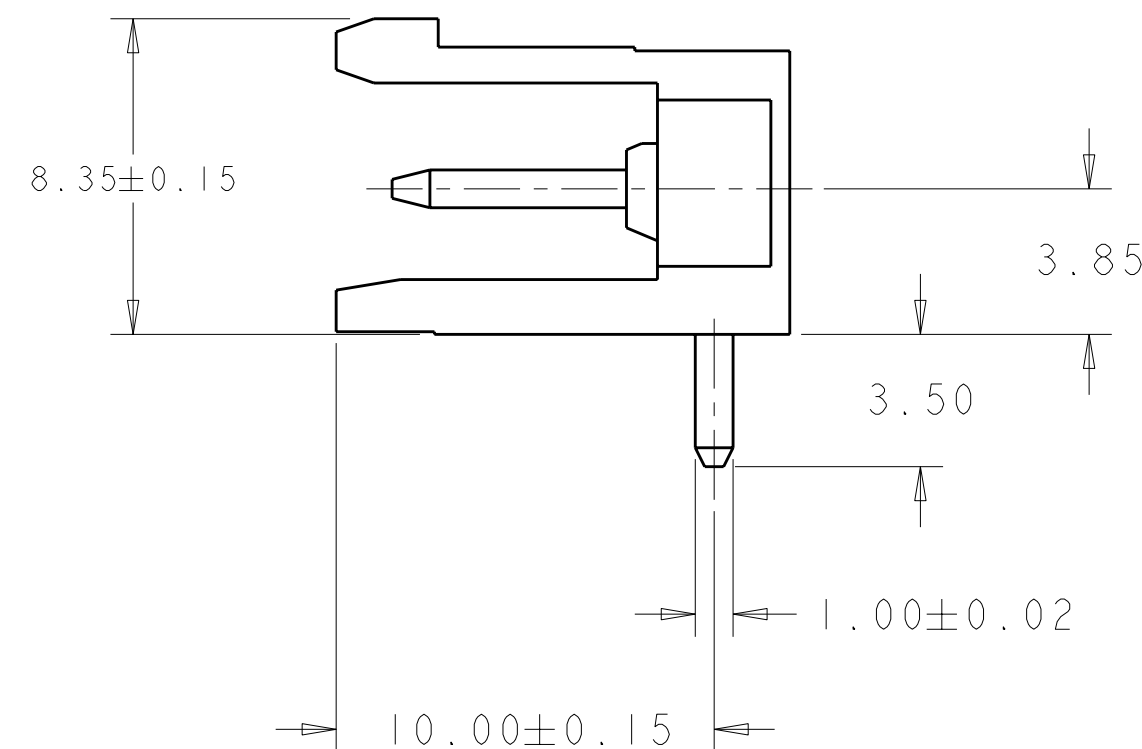






1776145-3 AS SHOWN

- ① MATERIALS AND FINISH
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-0 RATED,
COLOR: BLACK.
TERMINAL: COPPER ALLOY, TIN PLATED.
2. SUITABLE FOR 1,6-2,4mm PC BOARD THICKNESS.
 3. END-TO-END STACKABLE WITHOUT LOSS OF CENTERLINE SPACING.
 4. RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC. FILE N° E60677.
 5. IMO CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.
 6. UL RATING: 300V, 15A.

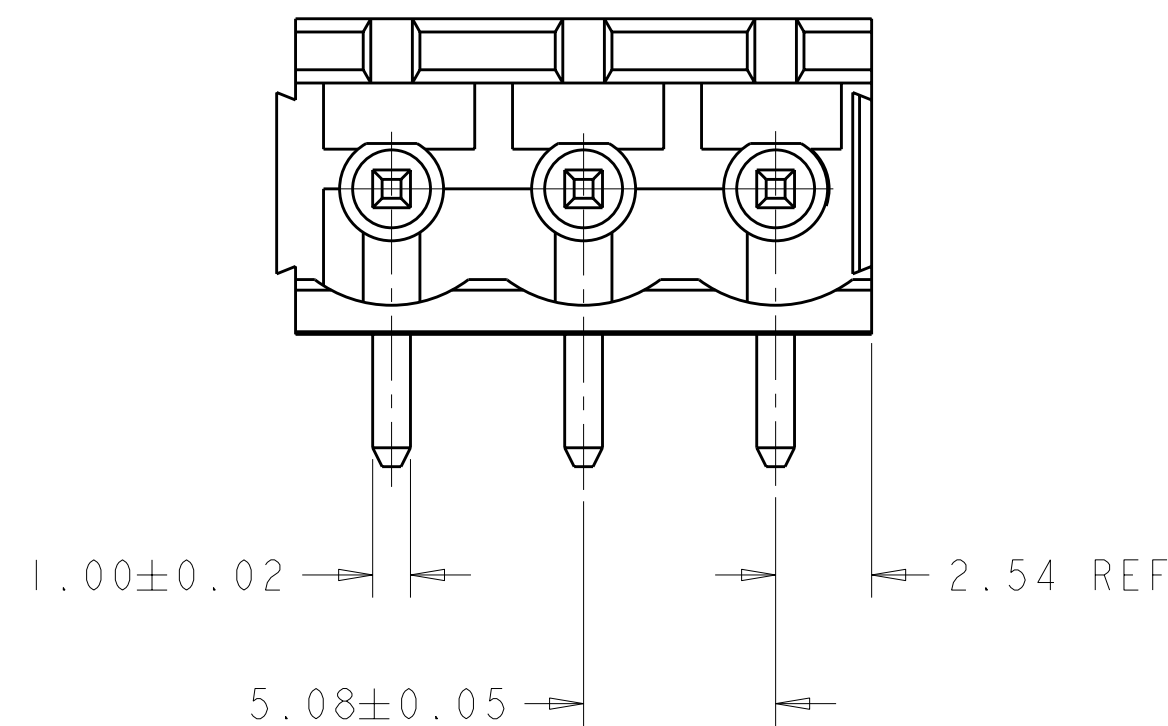

20.0	4	1776145-4
15.0	3	1776145-3
10.0	2	1776145-2
A	NO OF POSN	PART NUMBER

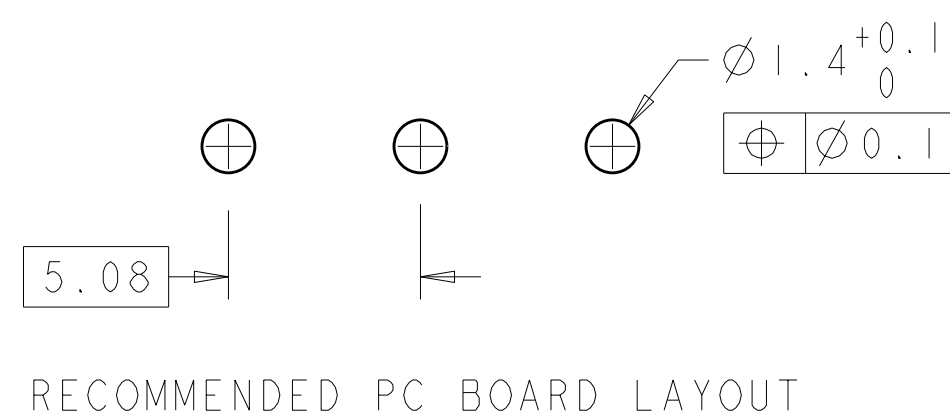

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 29JUN2005 CHK C. RICHARD 29JUN2005 APVD C. RICHARD 29JUN2005		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.2 1 PLC ±.25 2 PLC ±.25 3 PLC ±.25 4 PLC ±.25 ANGLES ±2		TERMINAL BLOCK HEADER ASSEMBLY 90 DEGREE, OPEN ENDS, STACKING 5.00mm PITCH	
MATERIAL		FINISH		SIZE	RESTRICTED TO
 -		 -		CAGE CODE A200779	DRAWING NO C-1776145
		WEIGHT			
		-			
CUSTOMER DRAWING				SCALE	REV
				3:1	01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776145-2](#)