

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0416710009](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: KK 396 Breakaway Header, Vertical, Square Pin, with Friction Lock, 10 Circuits, 0.38µm Gold (Au) Selective Plating

Documents:

[3D Model](#) [Packaging Specification PK-41671-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-08-50-001 \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

Application tooling part link


Application Tooling Part Link 11-20-0901

General

Product Family PCB Headers
 Series [41671](#)
 3D Viewer Yes
 Application Power, Wire-to-Board
 CURRENT-MAX-NUMERIC 7.0
 Overview [KK® Interconnect System - Molex](#)
 PITCH-MATING-NUMERIC 3.96
 Product Name KK 396
 UPC 800754832496

Physical

Breakaway Yes
 Circuits (Loaded) 10
 Circuits (maximum) 10
 Color - Resin Black
 Durability (mating cycles max) 50
 Flammability 94V-0
 Glow-Wire Capable No
 Lock to Mating Part Yes
 Material - Metal Brass
 Material - Plating Mating Gold
 Material - Resin Polyester
 Net Weight 3.478/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 4.37mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 3.96mm
 Pitch - Termination Interface 3.96mm
 Plating min - Mating 0.381µm
 Polarized to Mating Part Yes
 Polarized to PCB No
 Shrouded Partial
 Stackable No
 Temperature Range - Operating See Product Specification

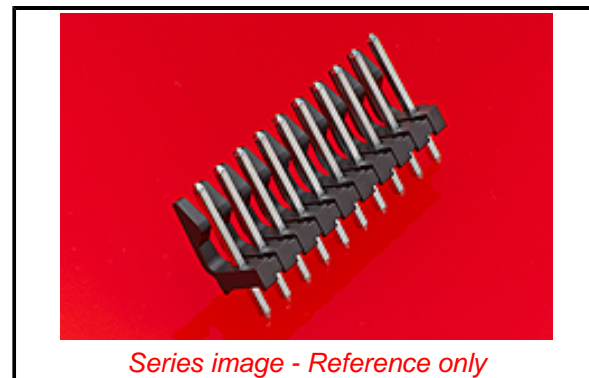

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/71/2019 (16 July
 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[41671](#) Series

Mates With

[2139](#) KK Crimp Housing, [41695](#) KK Crimp Housing, [6442](#) KK Crimp Housing, [2145](#) PCB Connector, [41815](#) PCB Connector, [3069](#) KK Crimp Housing

Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 7.0A
Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 235

Material Info

Engineering Number A-41671-C10A208

Reference - Drawing Numbers

Packaging Specification PK-41671-001-001
Product Specification PS-08-50-001
Sales Drawing SD-41671-001, SD-41671-001-002
Symbol/Footprint Data SYM-41671-0009

This document was generated on 10/09/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[41671-0009](#)