


LOC	DIST	REVISIONS				
CE	—	P	LTR	DESCRIPTION	DATE	APVD
			A	RELEASED	07MAY10	BB JD

- 1

MAXIMUM CONNECTOR INSERTION LOSS IS 0.2dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
- 2

MINIMUM RETURN LOSS AT 1310nm: 55dB. RETURN LOSS NOT REQUIRED FOR ASSEMBLIES <= 3 METERS.
3.

PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

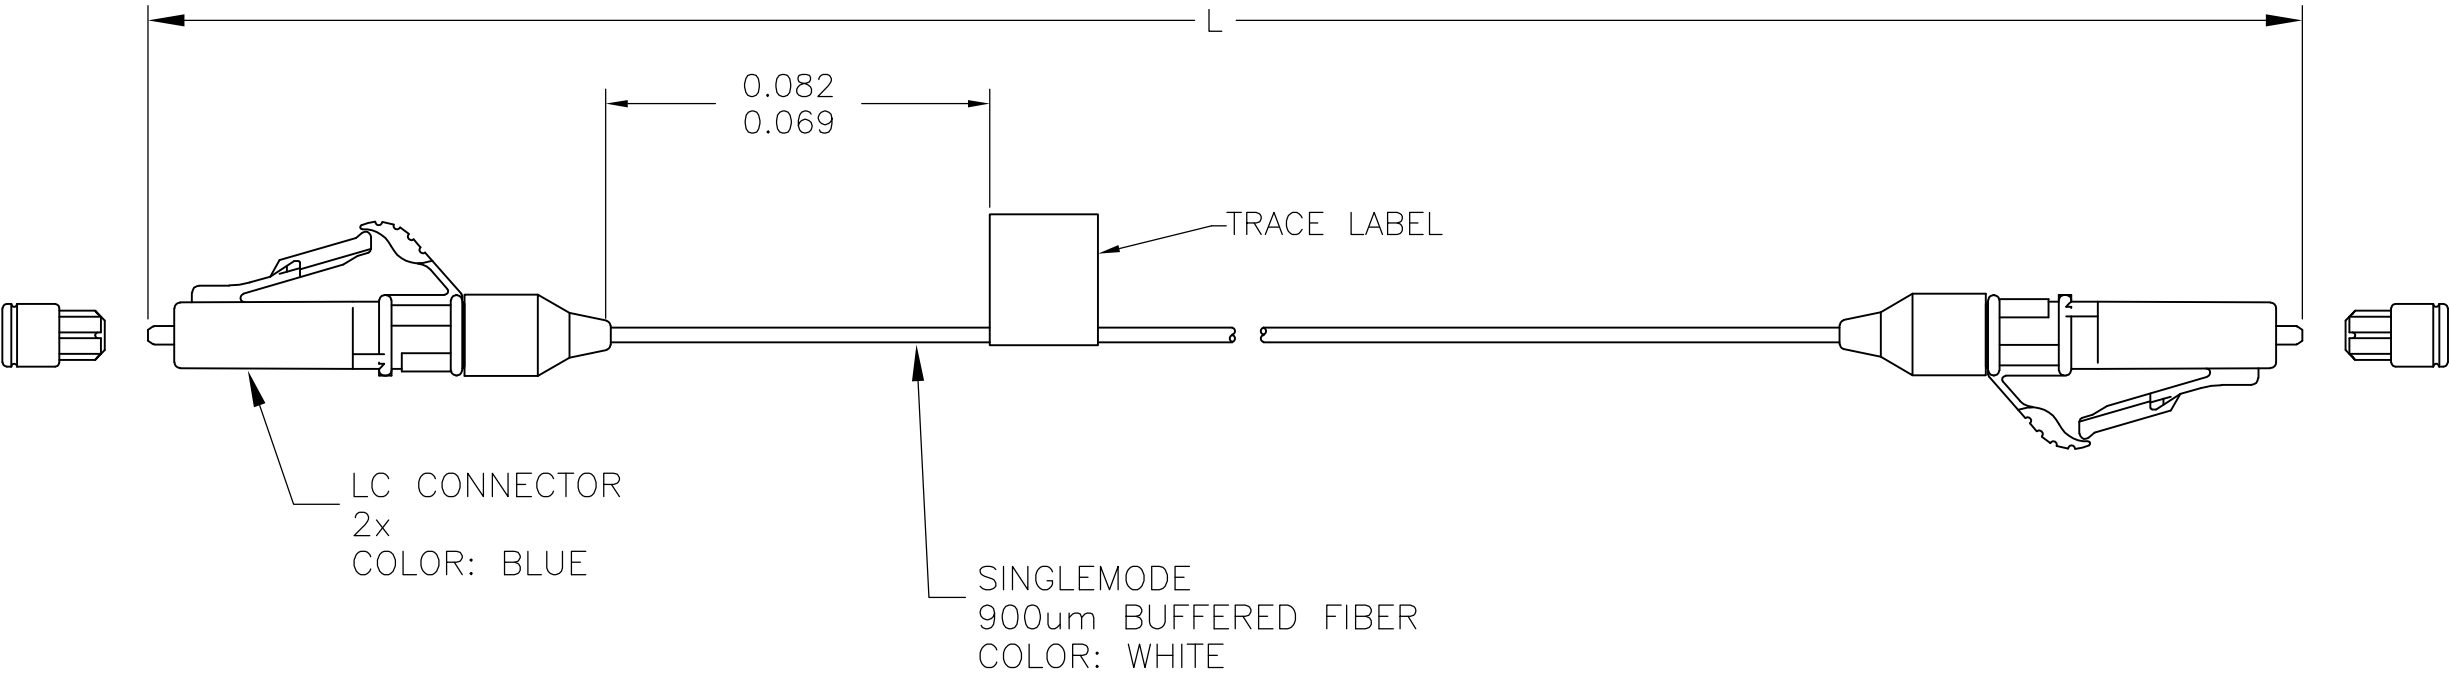

0.20	5.00±0.08 [196.90±3.00]	2064843-5
0.20	4.00±0.08 [157.50±3.00]	2064843-4
20.20	3.00±0.05 [118.10±2.00]	2064843-3
20.20	2.00±0.05 [78.70±2.00]	2064843-2
20.20	1.00±0.05 [39.40±2.00]	2064843-1
MAX IL (dB)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.BRIGGS 07MAY2010	Tyco Electronics Tyco Electronics Corporation Harrisburg Pa, 17105-3608			
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 07MAY2010				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.DUNCAN 07MAY2010	NAME CABLE ASSY, FIBER OPTIC, 900um, SM LC TO LC			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC —	—			
MATERIAL —	FINISH —	APPLICATION SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO C-2064843	RESTRICTED TO —
CUSTOMER DRAWING			WEIGHT —	SCALE NTS	SHEET 1 OF 1	REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2064843-5](#)