

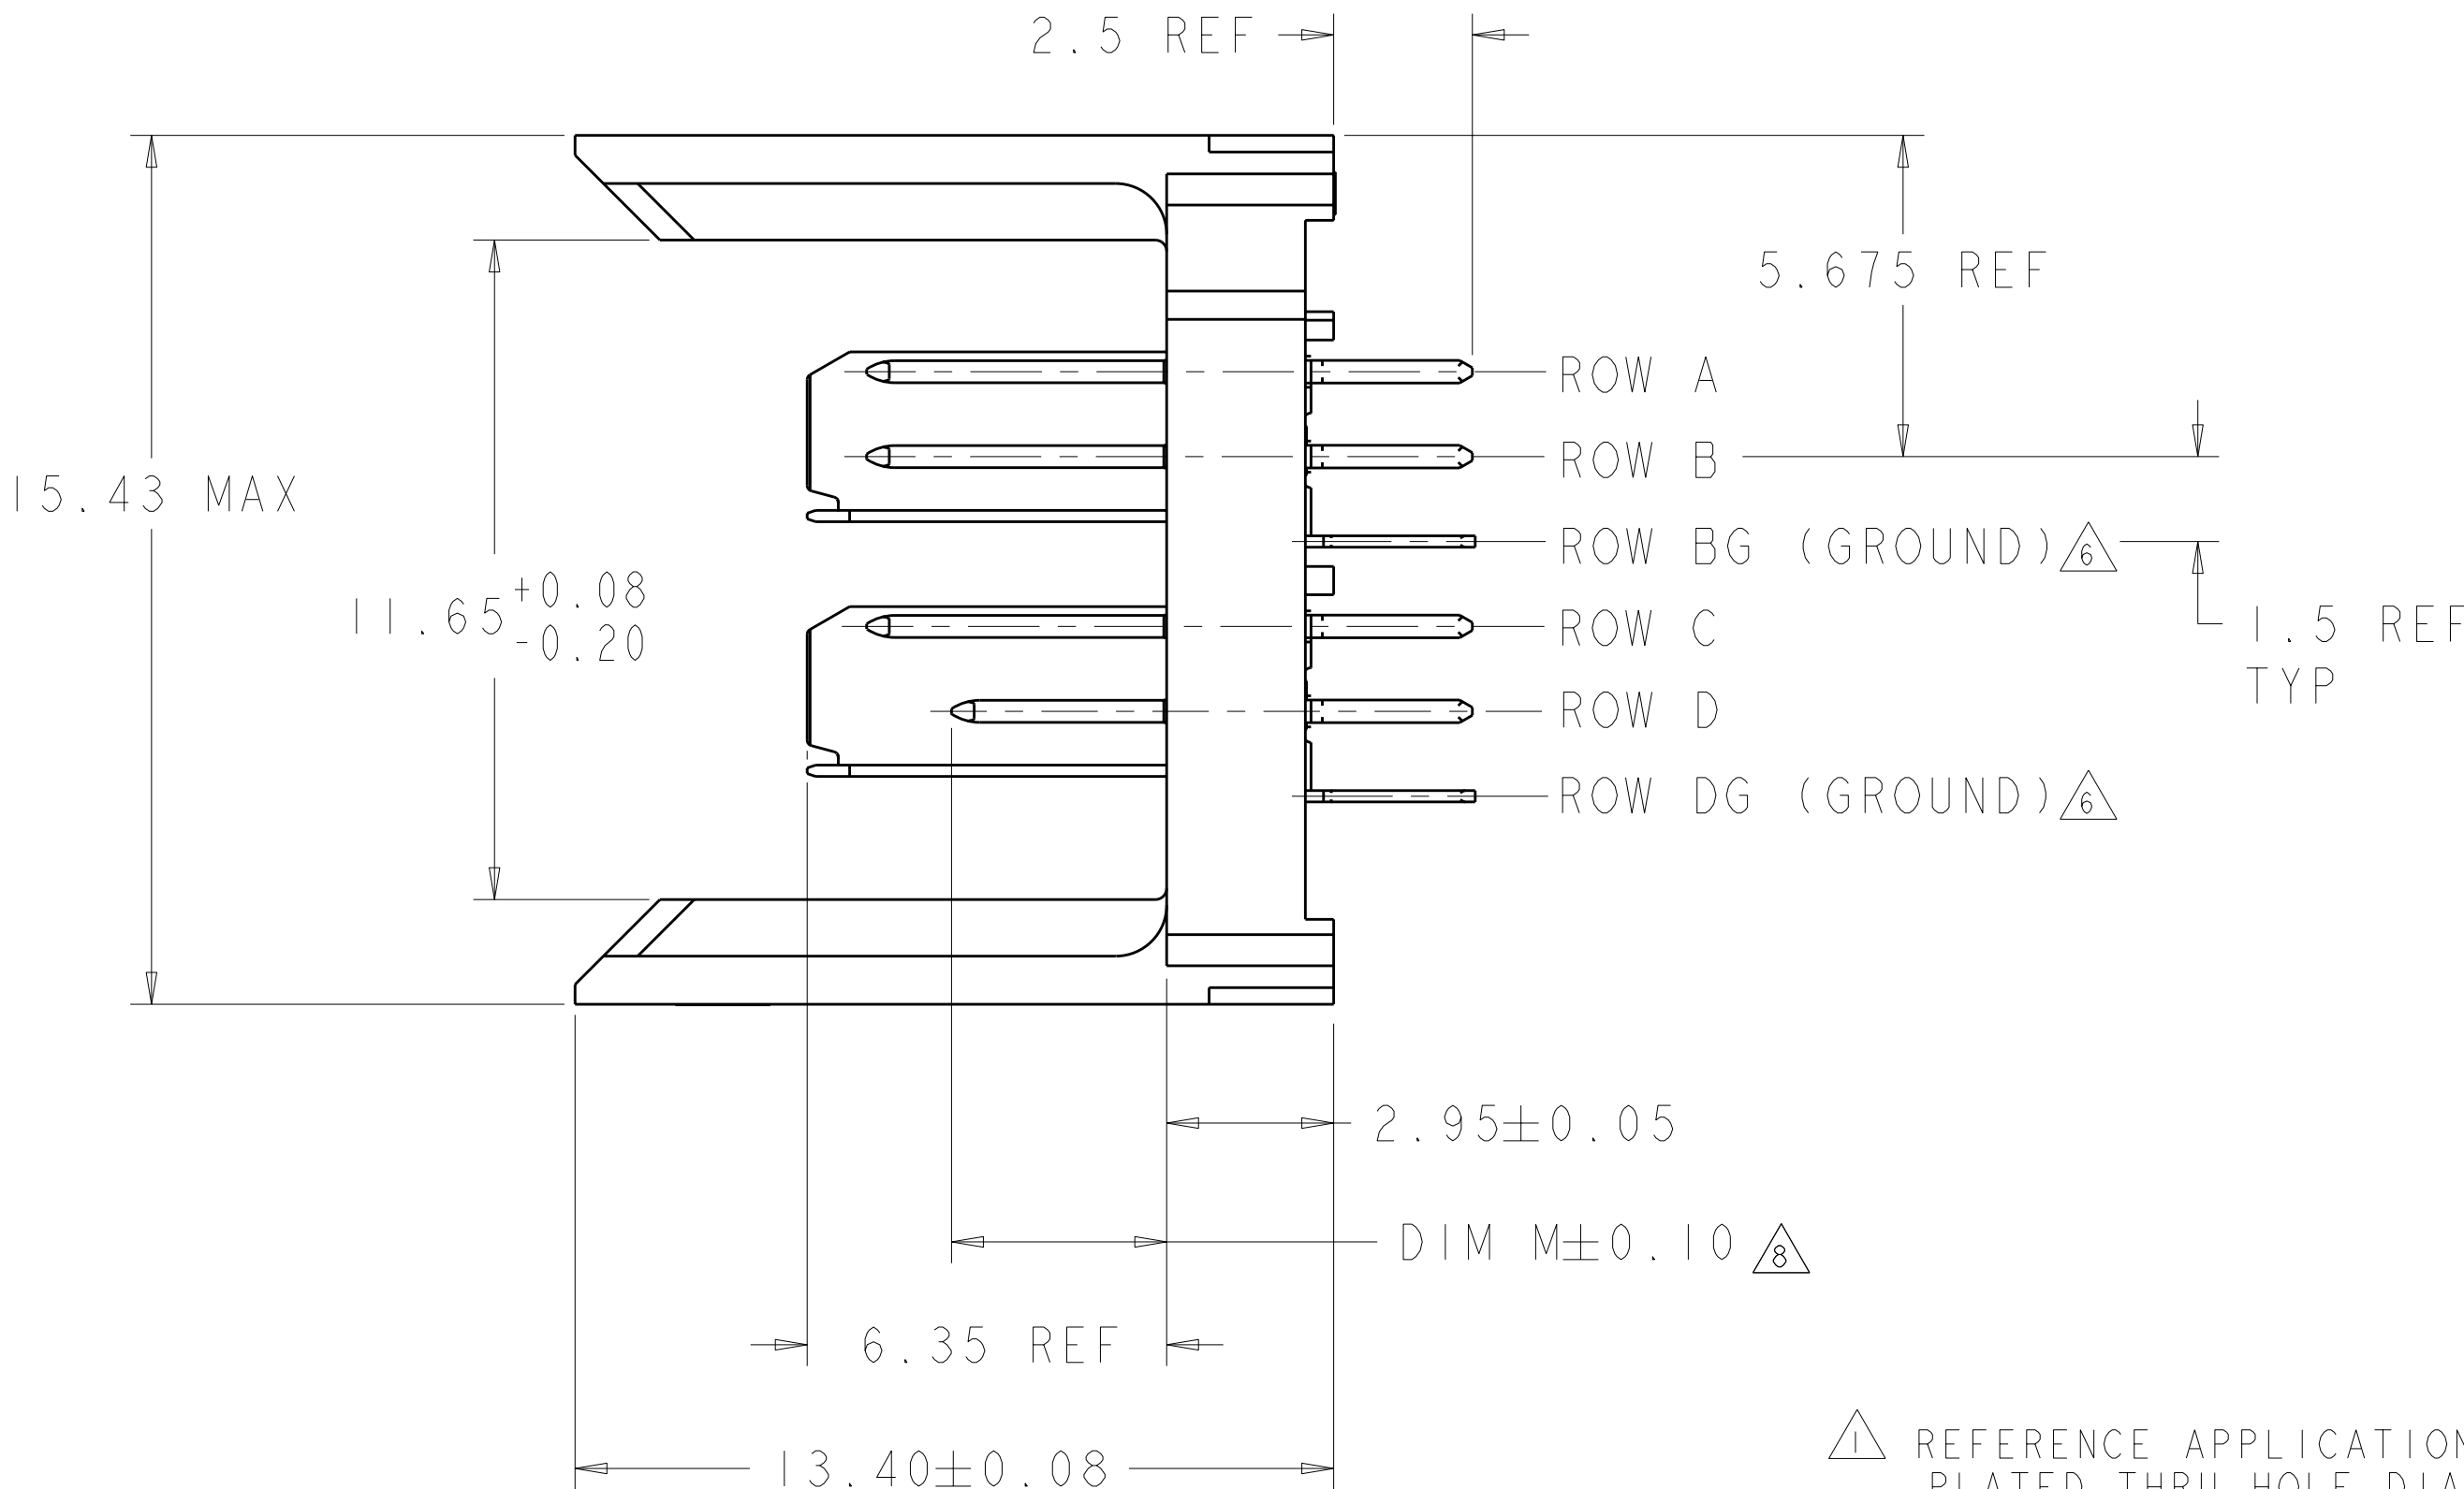
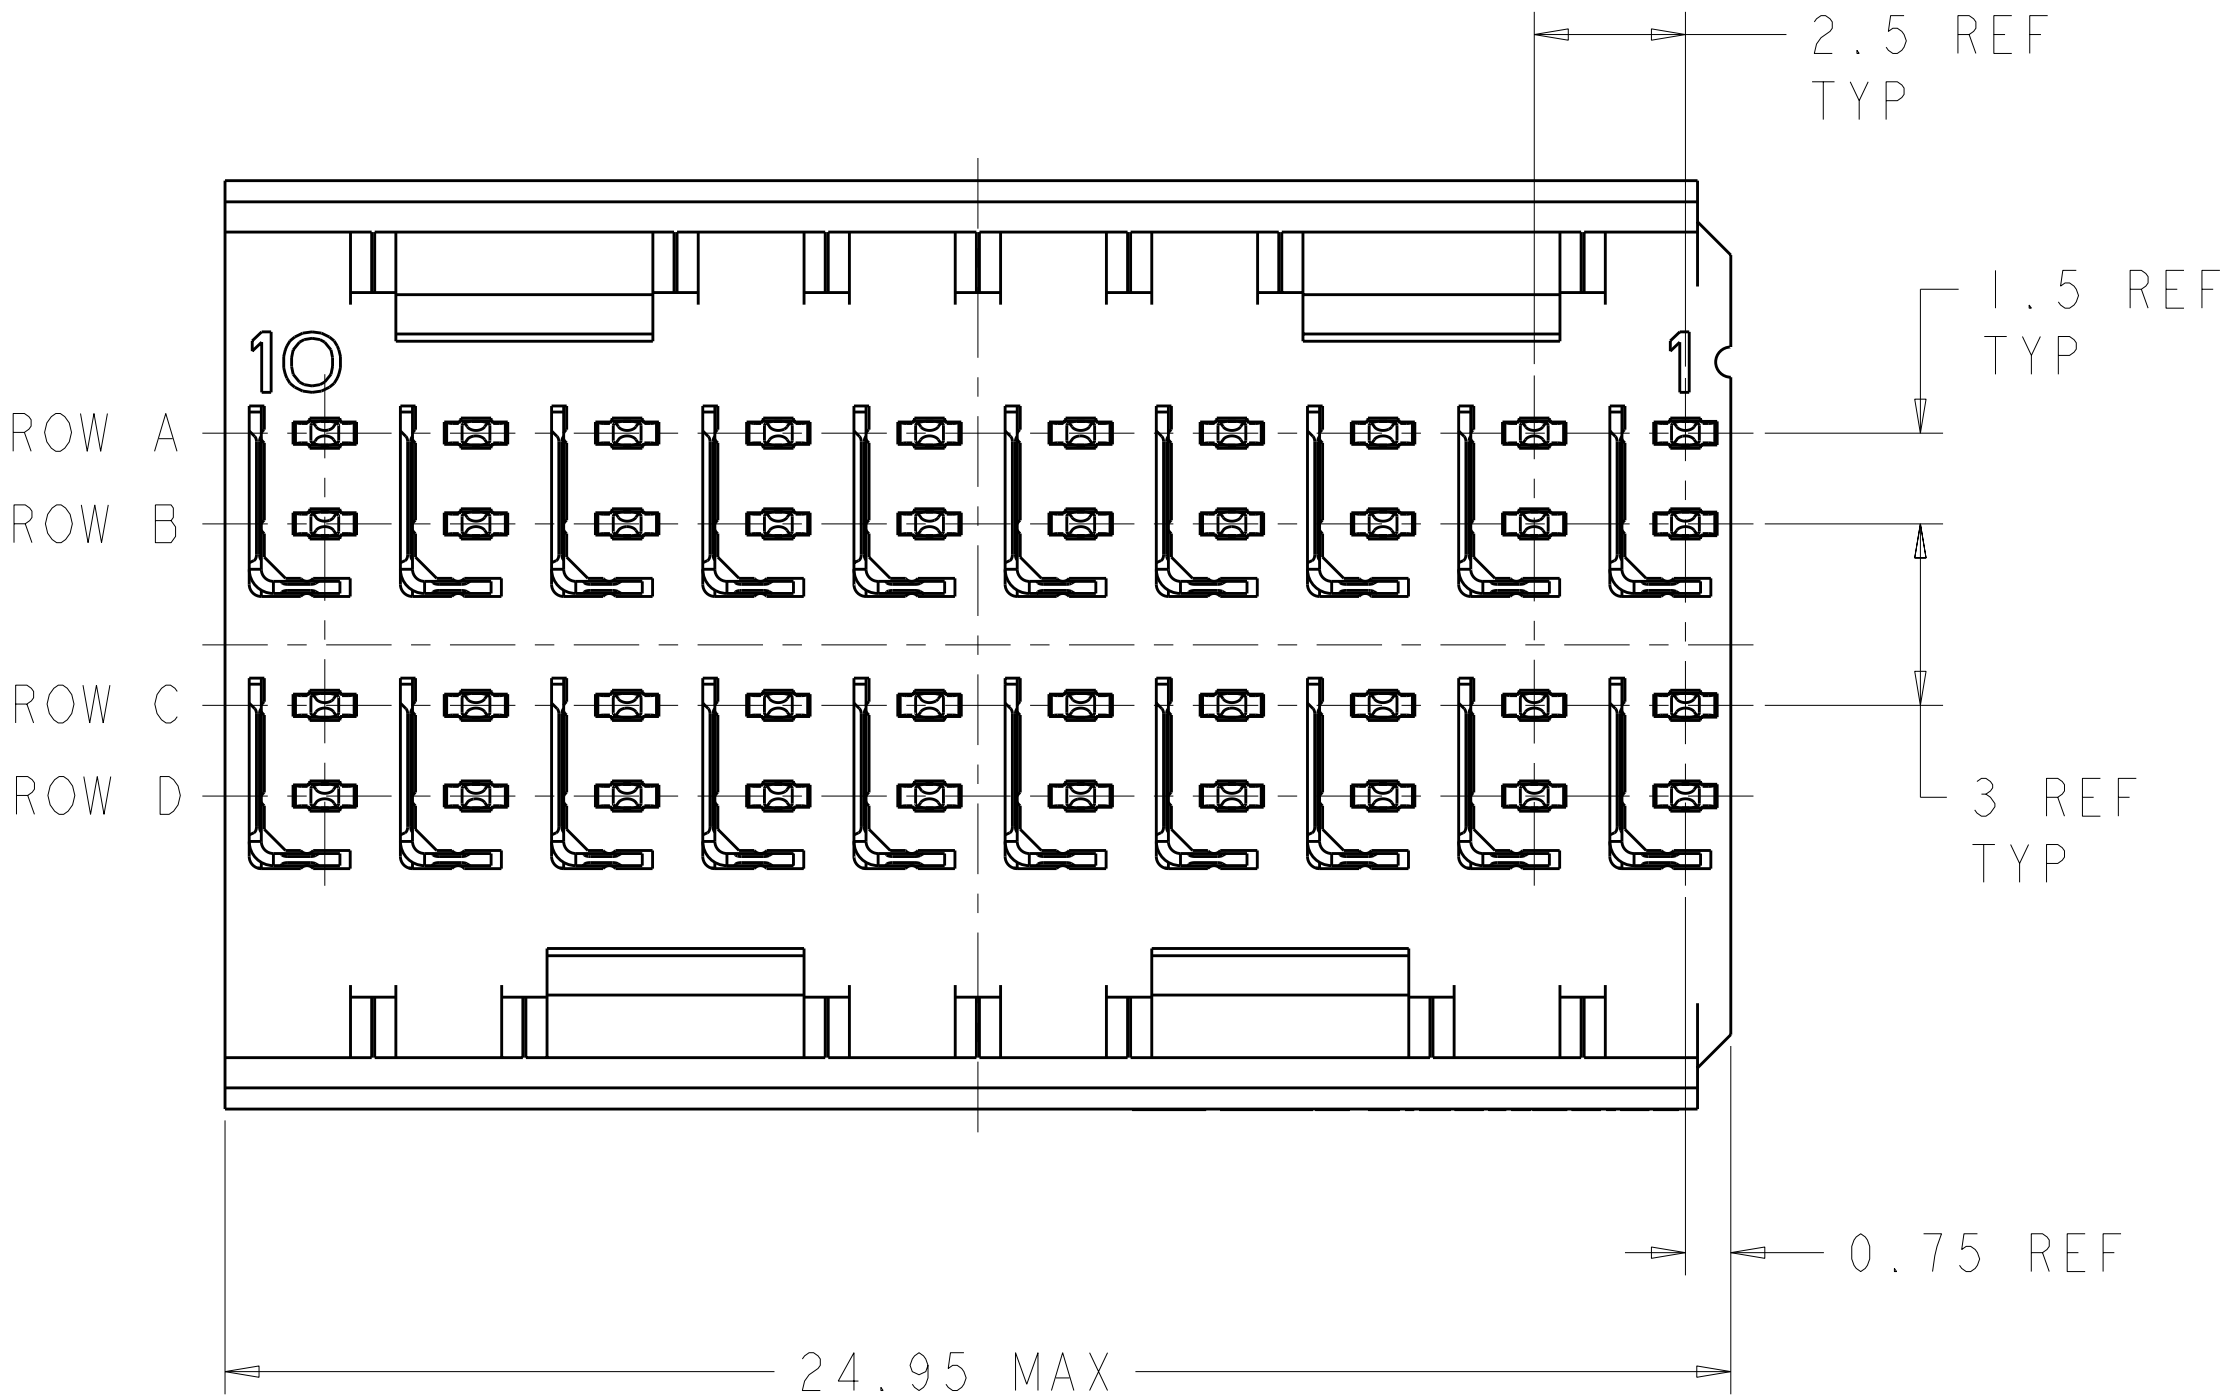


LOC		DIST		REVISIONS				
AD	00	F	LYR	DESCRIPTION	DATE	DWN	APVD	
		B		REVISED PER ECO-12-000118	18JAN2012	KH	DD	

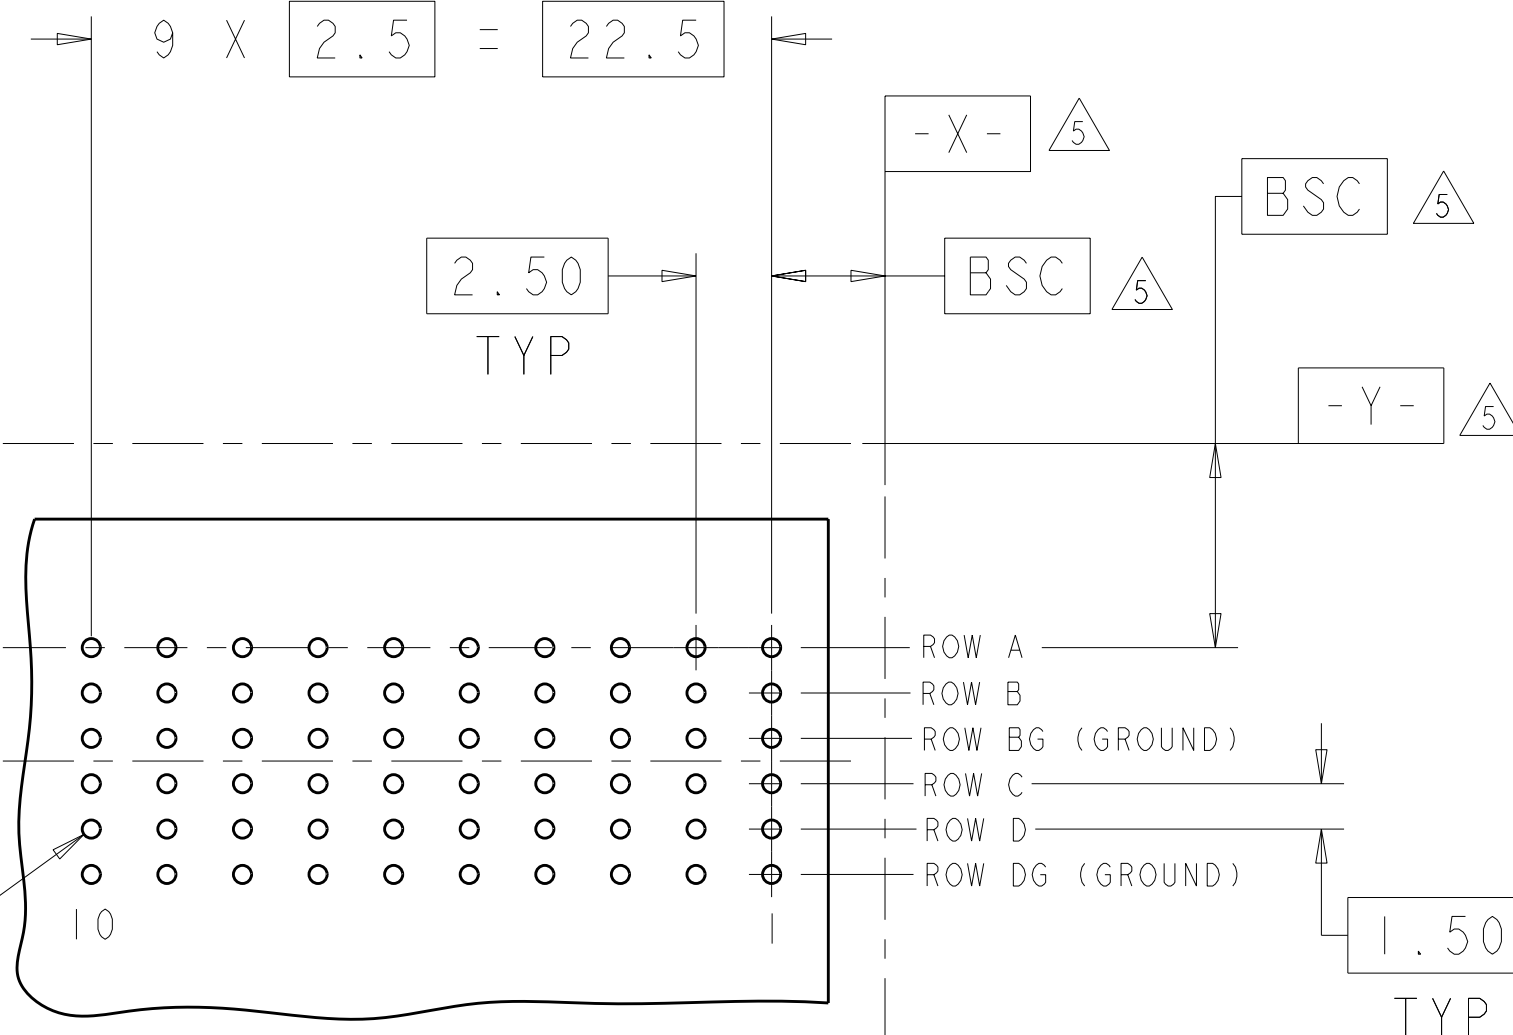

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- △ MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER
- △ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 µm MIN MATTE TIN OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFER TO "CONTACT LAYOUT" CHART FOR SEQUENCING.

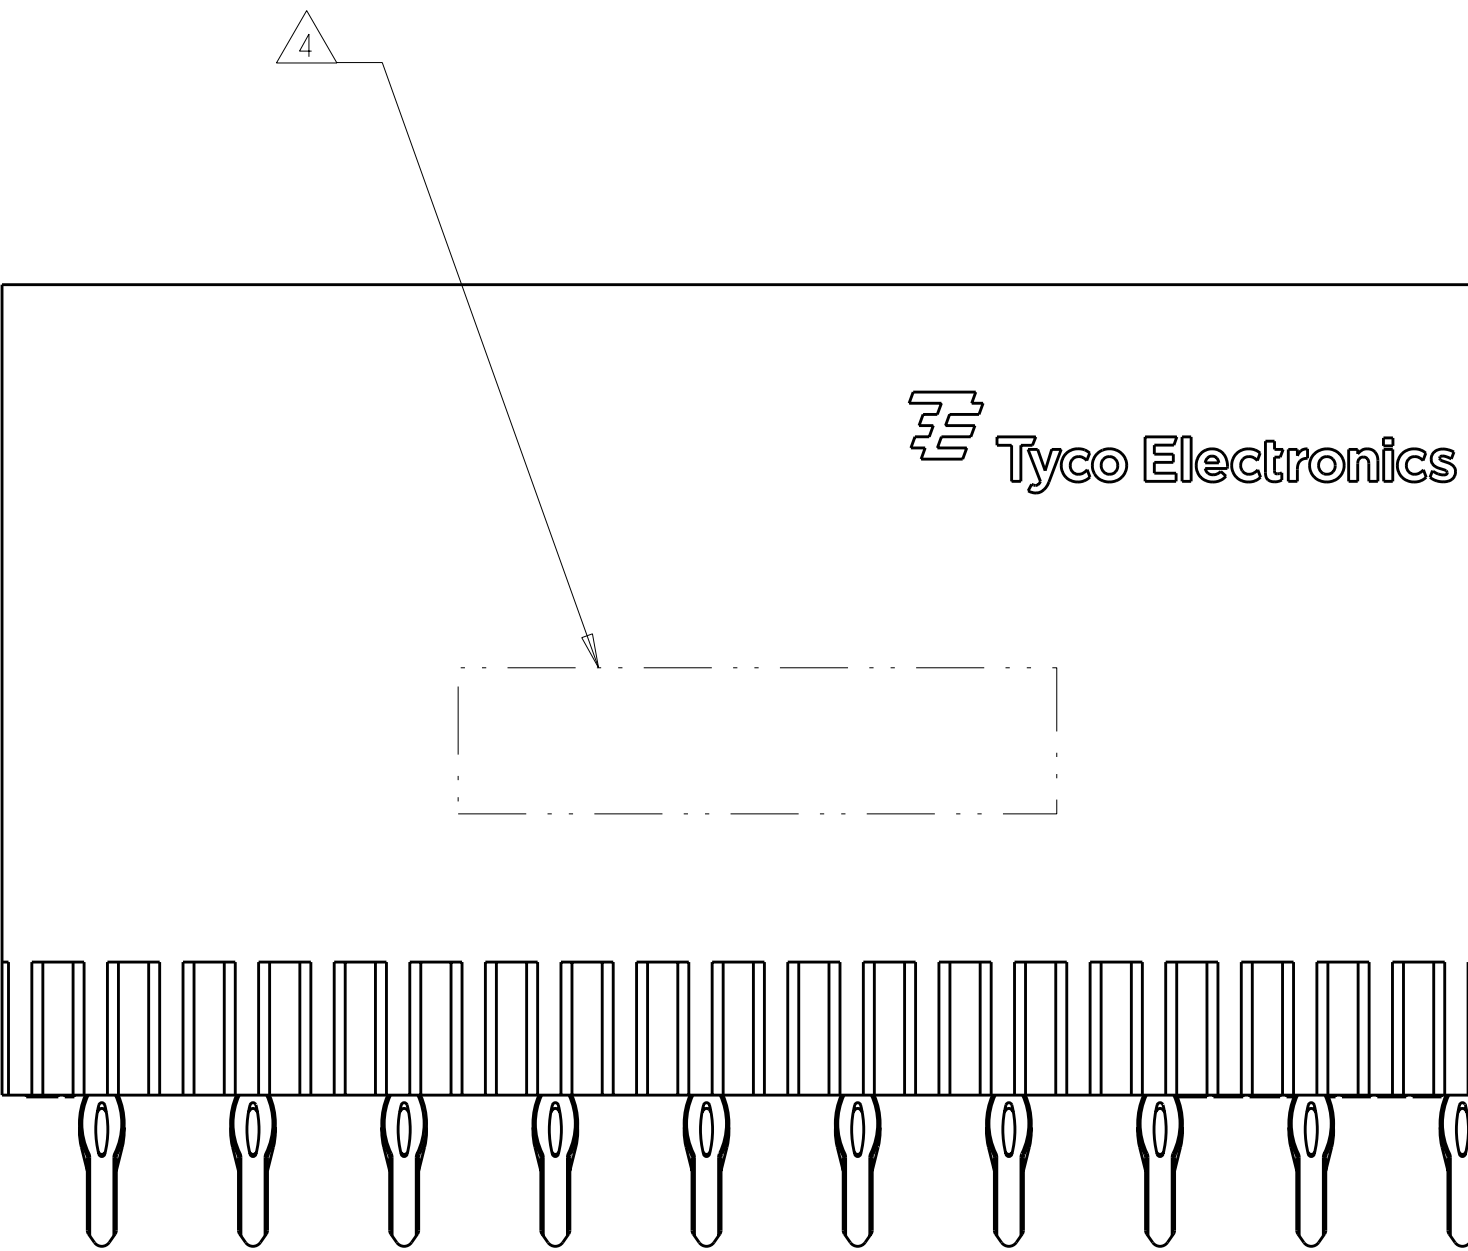

△
⊕ ∅0.05Ⓢ X Y
ALL PLATED THRU HOLES

CONTACT LAYOUT										
A = 3.80mm (DIM M)										
B = 5.30mm (DIM M)										
G = GROUND										
COLUMNS										
	10	9	8	7	6	5	4	3	2	1
ROWS	A	A	B	B	B	B	B	B	B	B
B	B	B	B	B	B	B	B	B	B	B
BG	G	G	G	G	G	G	G	G	G	G
C	B	B	B	B	B	B	B	B	B	B
D	B	B	B	B	B	B	B	B	B	A
DG	G	G	G	G	G	G	G	G	G	G

6469639-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 04OCT2005	TE Connectivity	
DIMENSIONS:		CHK R. PATTERSON 04OCT2005	NAME	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. PATTERSON 04OCT2005	PRODUCT SPEC	
	9 PLC ±	APPLICATION SPEC	HEADER ASSEMBLY, 2 PAIR, SELECTIVELY LOADED, 2.5mm TAIL, 25mm, HMZd	
	1 PLC ±		SIZE	CAGE CODE
	2 PLC ±		DRAWING NO	
	3 PLC ±		RESTRICTED TO	
	5 PLC ±		A100779C-6469639	
MATERIAL	ANGLES	WEIGHT	SCALE	
2	3	-	8:1	
FINISH		CUSTOMER DRAWING	SHEET 1 OF 1	
			REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6469639-1](#)