

## Main

Range of product	Harmony XVS
Product or component type	Electronic alarm
Device short name	XVS

## Complementary


Colour	Black
Material	ABS (acrylonitrile butadiene-styrene) (body) PC (terminal cover)
Product weight	0.18 kg
Marking	CE
Product mounting	DIN72 panel mounting
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	117 mA at 12 V 125 mA at 24 V 158 mA at 12 V 200 mA at 24 V
Clamping connection capacity	<= 1 x 1.5 mm <sup>2</sup>
Width	72 mm
Height	72 mm
Depth	69.3 mm

## Environment

Discrete output type	PNP
Signalling type	16 tones alarm
Standards	EN/IEC 61000-6-2 EN/IEC 61000-6-3 UL 464
Product certifications	UR
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Class of protection against electric shock	Class II conforming to EN/IEC 61140
IP degree of protection	IP54 conforming to EN/IEC 60529
[Us] rated supply voltage	12 V AC/DC 24 V AC/DC
Noise level	0..90 dB (continuous or intermittent tone) at 1 m
RoHS EUR status	Compliant
RoHS EUR conformity date	0808

Electronic Alarm

Dimensions

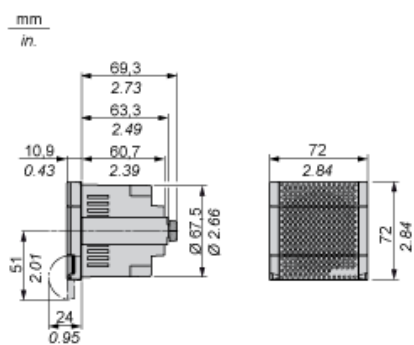

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XVS72BMBP](#)