


SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL □ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	35
	LAST NO. USED	29

MISSING SYMBOLS				REVISION HISTORY				AUTH	DR	AP/D	AP/D
DATE	STG	REV	N/P	CHG	ZONE						
16JL01	R	01	-	-		CREATED PD		203721	ESF	ESF	B6
13SE04	R	02	-	-		ALL ACTIVE PARTS - UPDATED PDM ATTRIBUTES		257886	ESF	ESF	B6
12FE07	R	03	-	-		12065940, 12065950-51 & 12077946 - OBSOLETE; 12077945 - RESTRICTED; 12065892-94, 12089236 & 12103948 - MAT'L SPEC WAS P3604		400499	JBD	FRG	BDO
27FE07	R	04	-	-		ALL ACTIVE PARTS - MATERIAL SPEC WAS M3606404		400643	MM	MM	BDO


STAMP "PXX" ON UNDERSIDE IN THIS AREA WITH 0.8 HIGH CHARACTERS PER NOTE #12. CHARACTERS MUST BE POSITIONED IN DIRECTION SHOWN, OR AT 180° TO DIRECTION SHOWN

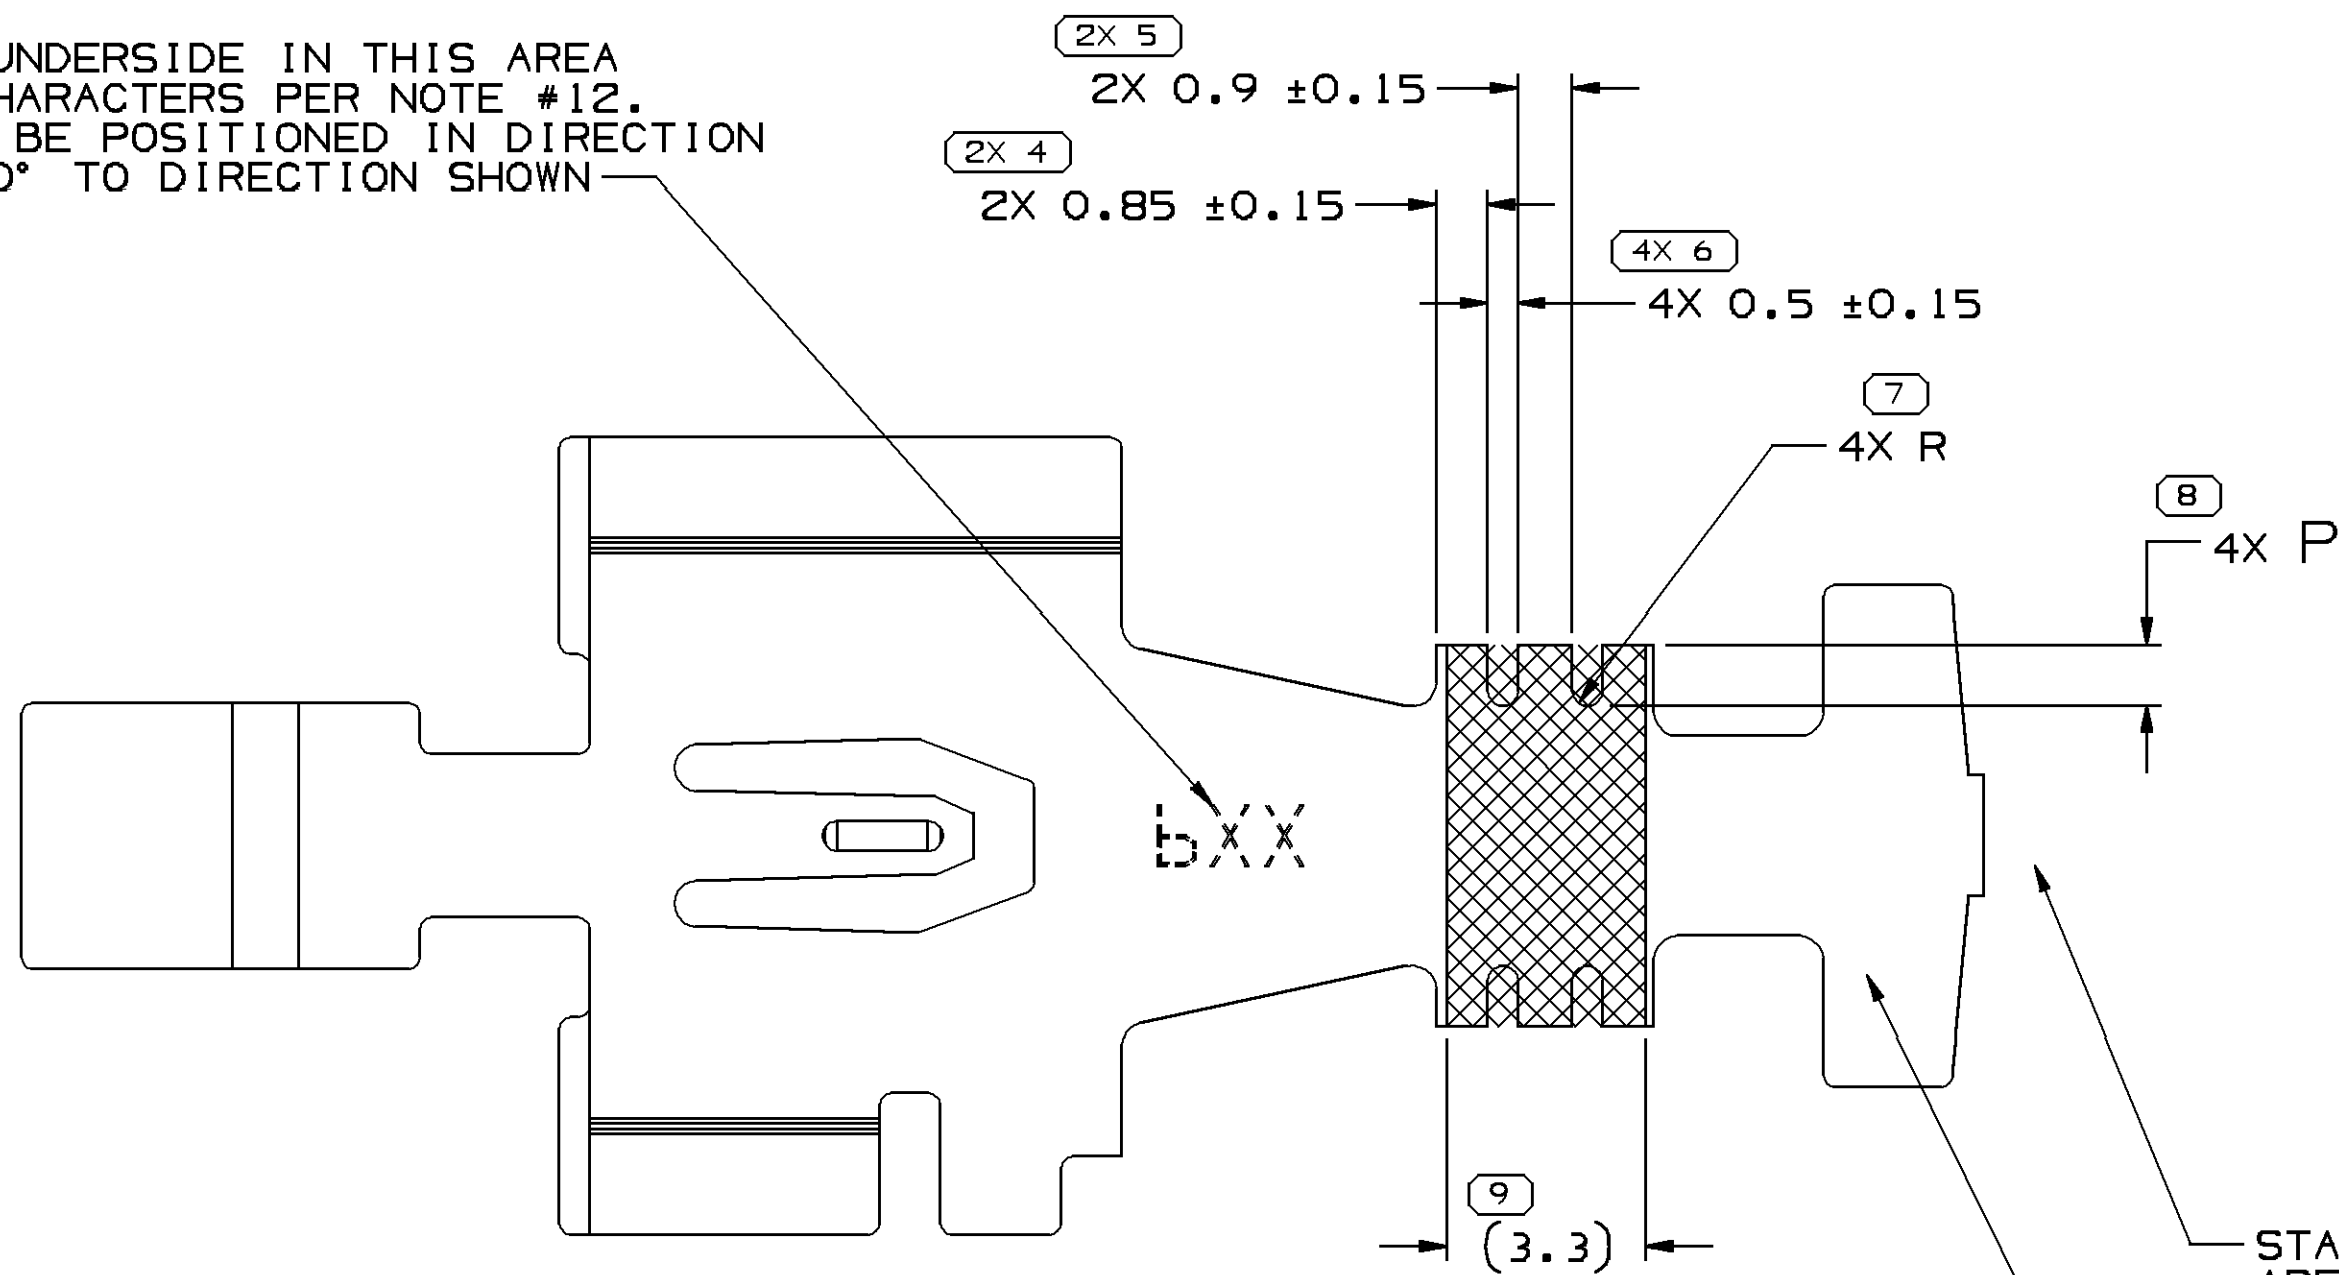





BLANK VIEW - APPROXIMATE
TYPE 101

STAMP CABLE I.D. NO. ON UNDERSIDE IN THIS AREA WITH 0.8 HIGH CHARACTERS SHOWN IN CHART. CHARACTERS MUST BE POSITIONED PERPENDICULAR TO CENTRELINE.


STAMPED KNURL PATTERN

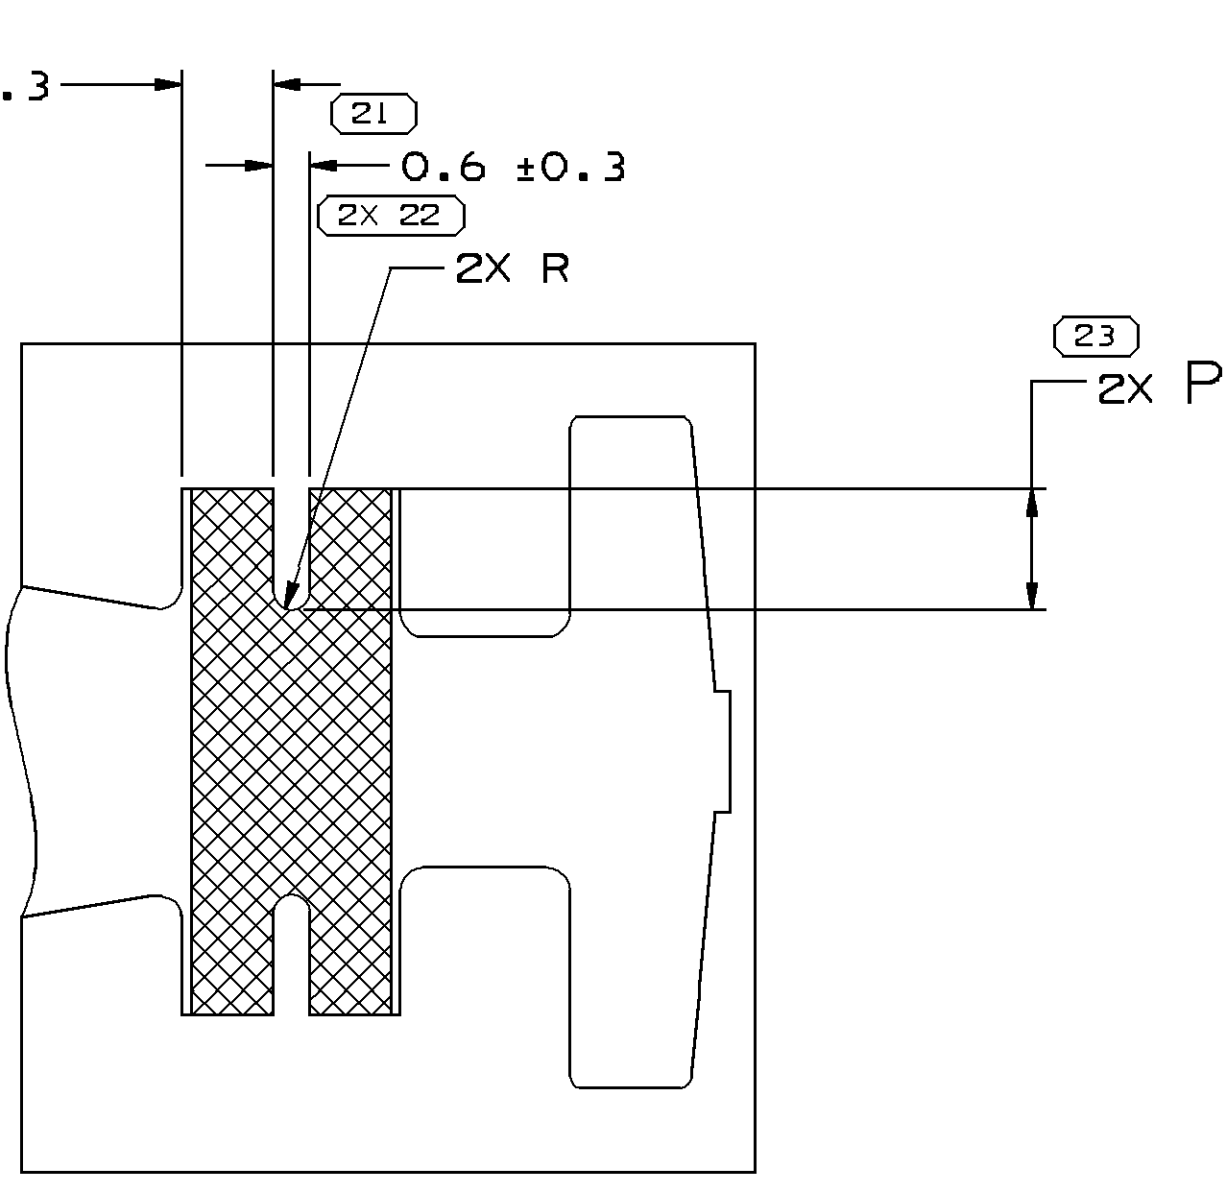


BLANK TYPE 102
SAME AS TYPE 101 EXCEPT
AS SHOWN

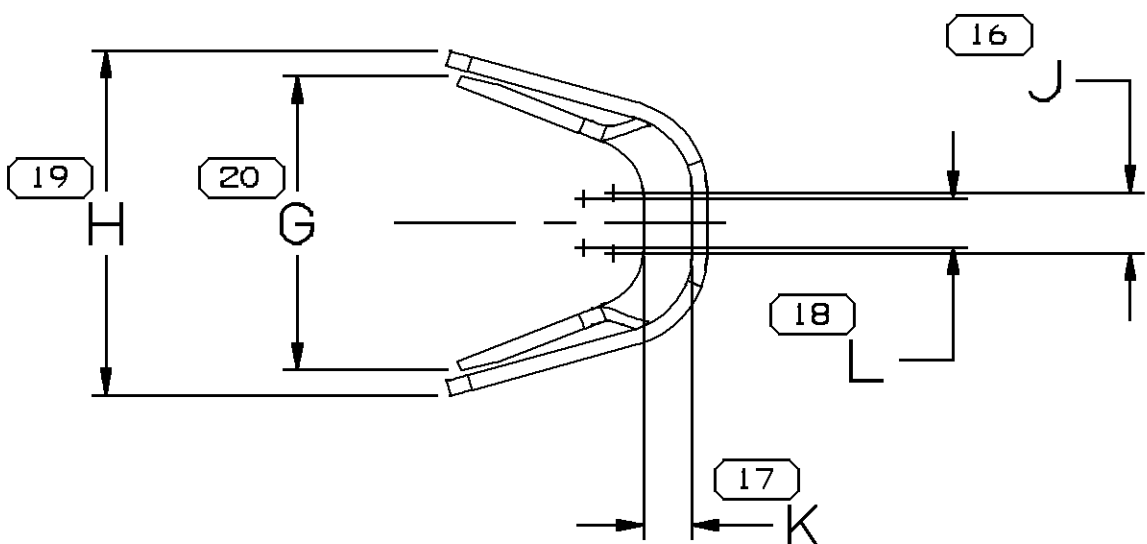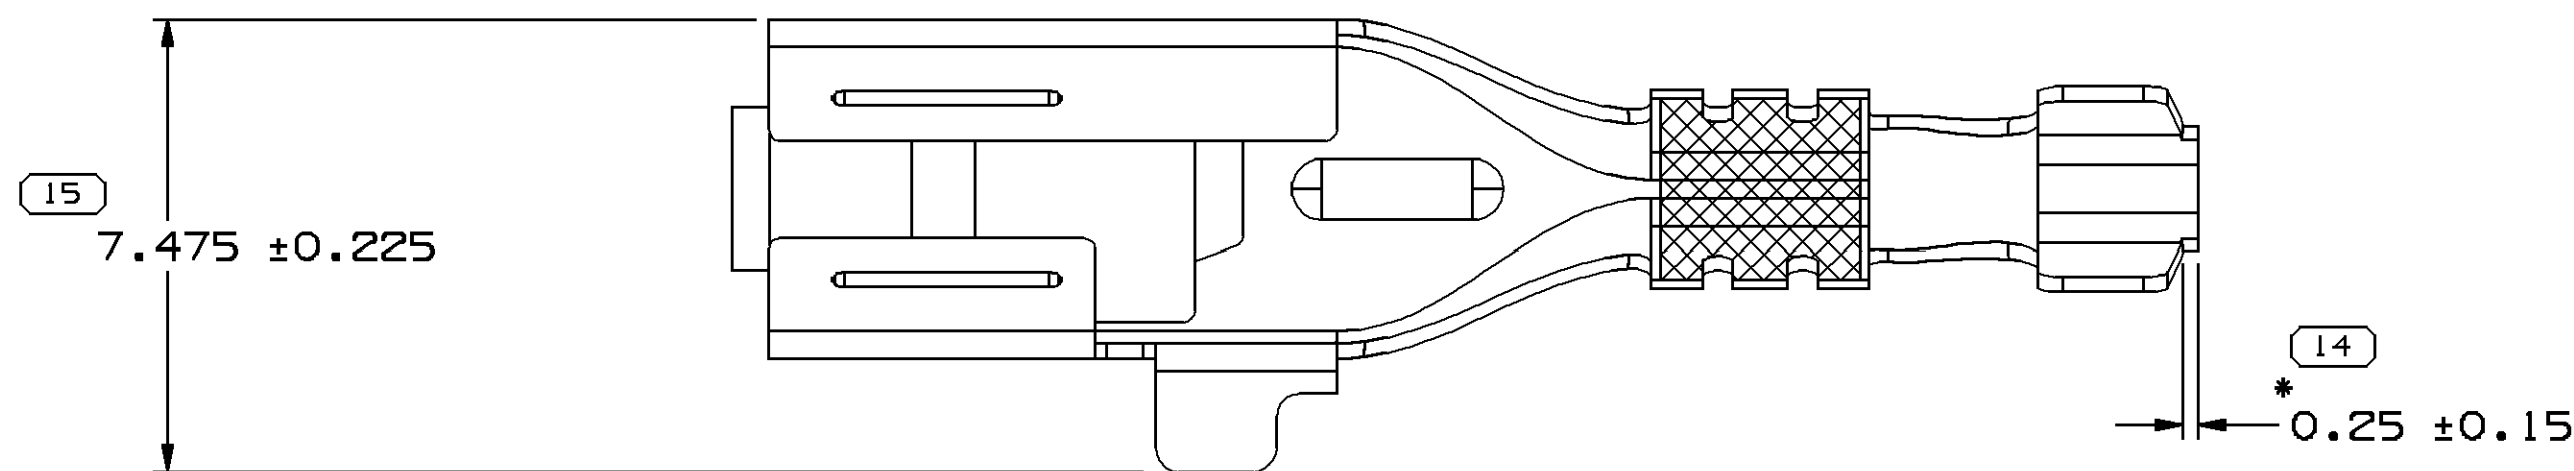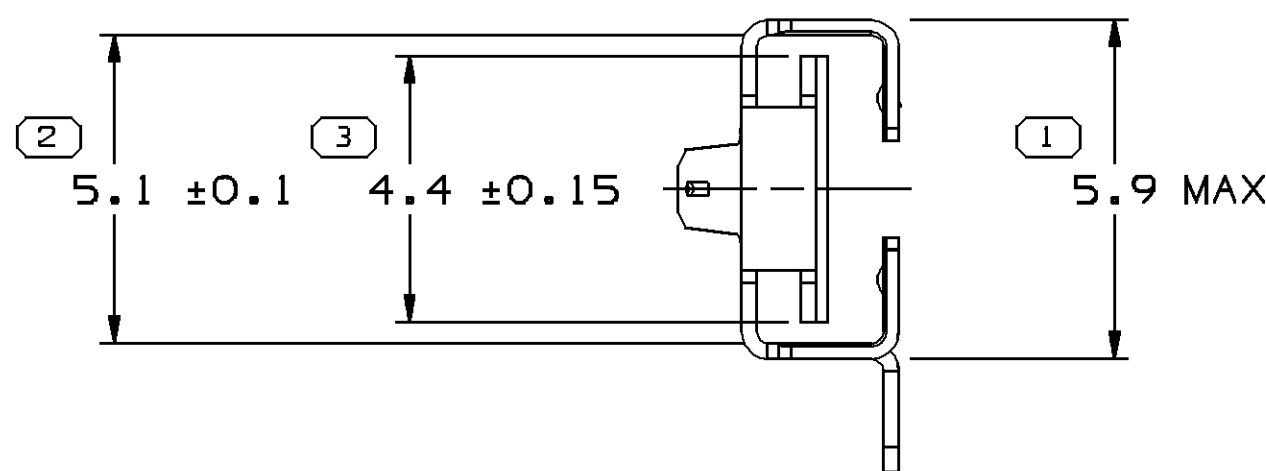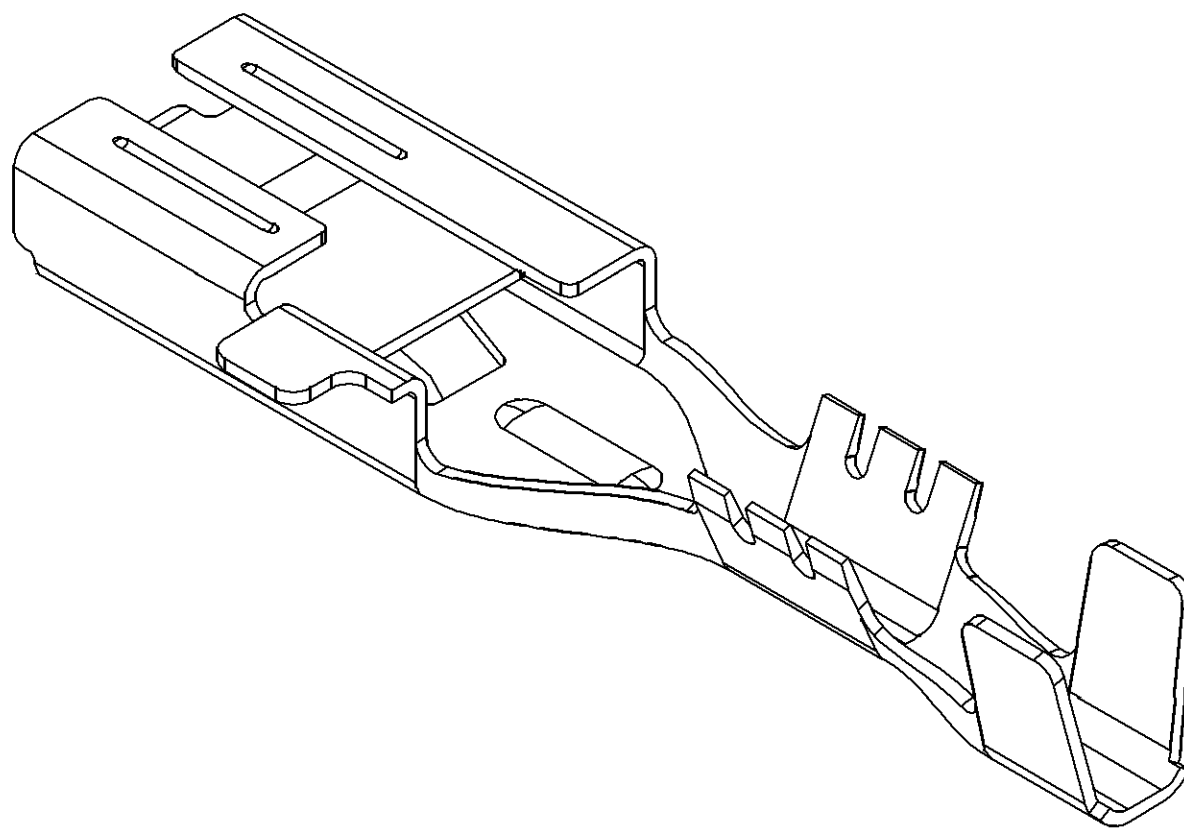

WING CONST. I

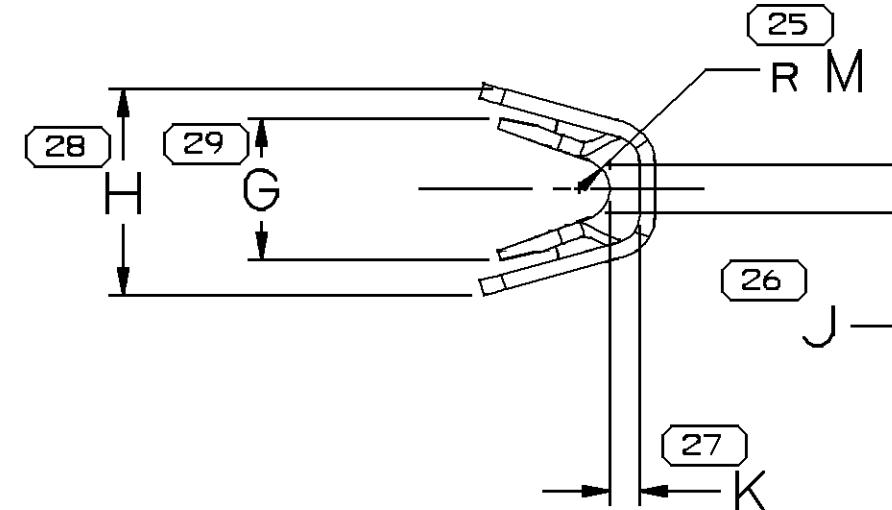

WING CONST. II

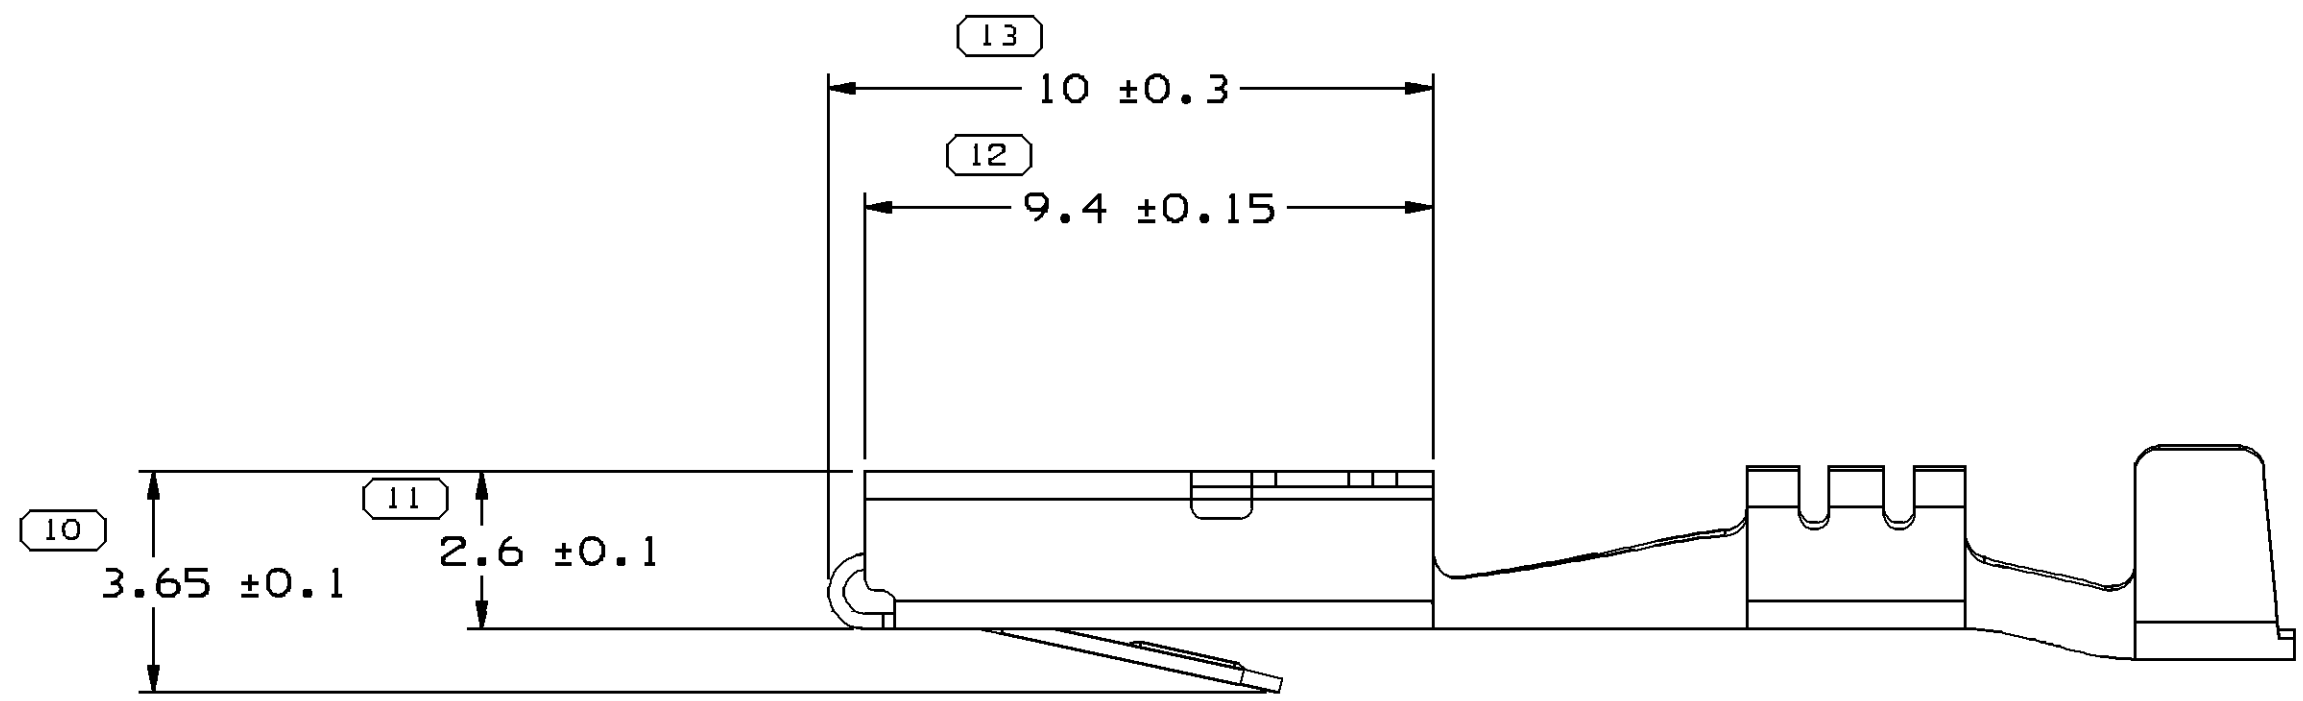

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA. ALL RADII 0.2
- R 0.4 MAX PERMISSIBLE ON ALL "SHARP" CORNERS. ALL LOCKING FEATURES MUST HAVE "SHARP" CORNERS.
- "PXX" INDICATES "P" PLUS LAST TWO DIGITS OF MAKE DIE SERIES NUMBER (P01, P02, P03, ETC).
- * DENOTES DIMENSION MADE AT CUT-OFF AND CRIMP DIE.
- MAXIMUM CURRENT CAPABILITY IS 24 AMPS.
- TERMINAL ENGAGE 6N TO 27N TERMINAL DISENGAGE 2N TO 15N WHEN MATED TO A 0.81 THICK X 4.8 WIDE HARDENED STEEL BLADE.
- "▲" INDICATES MATERIAL TIN PLATE OVER COPPER PLATE.
- RECOMMENDED MATING BLADE - WIDTH: 4.8 ± 0.1 THICKNESS: 0.825 ± 0.035 LENGTH: 7 ± 0.1

PART DRAWING	
STYLE	
VOLUME (10/1)	DISTR CODE
UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS SHOWN BY THE DIMENSIONING AND TOLERANCING PRACTICES AND RELATED DATUMS APPLY HERE. RULE #10 PERFECT FORM AT ALL TIMES DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE SHOWN SEPARATELY. ALL DIMENSIONS ARE IN MILLIMETERS	
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	
DIMENSIONAL RANGE (MM)	CHART D
FROM 0 TO 12	>12
TOLERANCE UNLESS OTHERWISE SPECIFIED	
±0.1	±0.2
ANGULAR TOLERANCE 22°	

THIRD ANGLE PROJECTION	
DO NOT SCALE	USE MATH DATA

DELPHI	
DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE	
WVREN, OH	
DR	DATE
AP/D01 E. SALAZAR	16JL01
AP/D02 E. SALAZAR	16JL01
AP/D03 B. GROUBERT	16JL01
AP/D04	
AP/D05	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001	
SEE CHART	
DRAWING NAME	
TAXI TERM M/P 480 SPL	
DRAWING NUMBER	
12065899	
SIZE A0	SCALE 1 OF 1
FRAME NO 1	SHEET NO 1
STG REV N/P	R 04

PART NO	REV	STATUS	MAT'L SIZE	MAT'L SPEC	PART NO	REV	STATUS	MAT'L SPEC	SIZE (MM²)	DIA	ID	BLANK TYPE	WING CONST.	G	H	J	K	L	M	P
12077946	D4	OBSOLETE	0.254 X 36.5	M3604	12089236	B5	-	M3606440	(2) 0.35	2-1.05	222	101	11	2.4	5.1	1.3	0.5	-	0.5	1
12077945	C4	RESTRICTED	0.254 X 36.5	M3604	12103948	A5	-	M3606440	(2) 1-0.8	3.15-1.4	217	102	11	4.9	6.4	1.8	0.7	-	1.15±0.15	1.5
12077944	C2	OBSOLETE	0.254 X 36.5	M3604	-	-	-	-	(2) 0.5	2.4-2.2	220	102	11	3.6	5.9	1.3	0.7	-	0.9	1.5
12065951	E4	OBSOLETE	0.254 X 36.5	M3604	12065893	E5	-	M3606440	0.5-0.35	2.4-1.05	21	101	11	2.1±0.2	3.5±0.3	0.8	0.5	-	0.5	1
12065950	G4	OBSOLETE	0.254 X 36.5	M3604	12065894	G5	-	M3606440	1-8	3.15-1.4	17	101	1	3	3.4	0.8	0.5	0.3	0.5	1
12065940	E4	OBSOLETE	0.254 X 36.5	M3604	12065892	E5	-	M3606440	3-2	3.4-3	13	102	1	4.6	5.7	1	0.8	0.8	0.5	2
12065949	C1	INACTIVE	0.254 X 36.5	M3604	12065891	C1	INACTIVE	P3604	2-1	3.1-1.5	15	101	1	3.6	4.4	0.8	0.7	0.8	0.5	1.7
UNPLATED														G	H	J	K	L	M	P
PLATED														±0.4	±0.4	±0.3	±0.3	±0.3	±0.3	±0.15

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[12065894-L](#) [12065894](#) [12065894-MR](#)