


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PV14-6FFB-3K	#6	.80 (20.32)	.28 (7.11)	.19 (4.83)	.64 (16.26)	.15 (3.81)
PV14-8FFB-3K	#8	.86 (21.84)	.31 (7.87)	.23 (5.84)	.68 (17.27)	.17 (4.32)
PV14-10FFB-3K	#10	.86 (21.84)	.35 (8.89)	.23 (5.84)	.68 (17.27)	.20 (5.08)

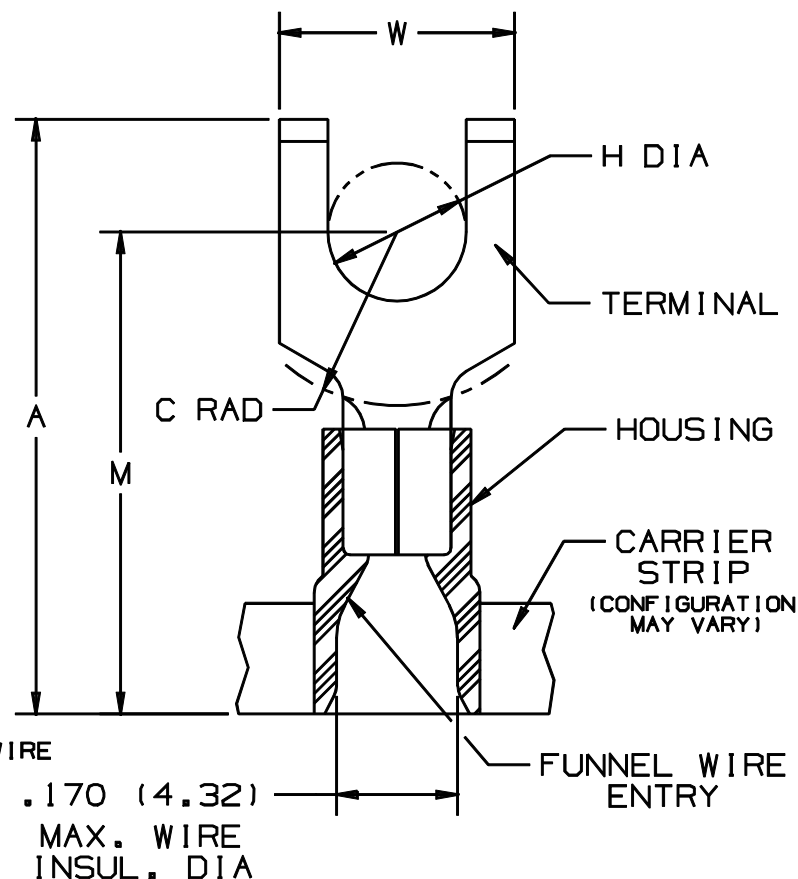

NOTES :


1. UL LISTED AND CSA CERTIFIED FOR :
 - A. 600 V MAX. VOLTAGE RATING
 - B. 221°F (105°C) MAX. TEMP. RATING
 - C. #16-14 AWG (1.5-2.5 mm²) SOLID OR STRANDED, COPPER WIRE
2. PACKAGE QTY. : 3K = 3000 PCS.
CONTINUOUS MOLDED CARRIER STRIP
3. MATERIAL :
 - A. STAMPING - .03" THK COPPER, TIN PLATED
 - B. HOUSING - BLUE VINYL
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS :
 - A. PRESSES - CP-851, CP-860, CP-861
 - B. APPLICATOR - CA-800
 - C. DIE INSERTS - CD-800-2



LISTED
587H
E52164



CERTIFIED
LR31212



A41077_04

								PANDUIT	TINLEY PARK, ILLINOIS
04	12/00	ED		FILESPEC WAS: N41077AA_PCD_03	03774			TERMO 2PC CONTINUOUSLY MOLDED VINYL INSULATED, #16-14 BARREL, FLANGED FORKS	
03	11/95	ED		REVISIONS TO NOTES AND TABLE					
REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	CUST	DRAWN BY FES	CHK'D FS SCALE NONE DRAWING NO A41077

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PV14-10FFB-3K](#) [PV14-6FFB-3K](#) [PV14-8FFB-3K](#)