


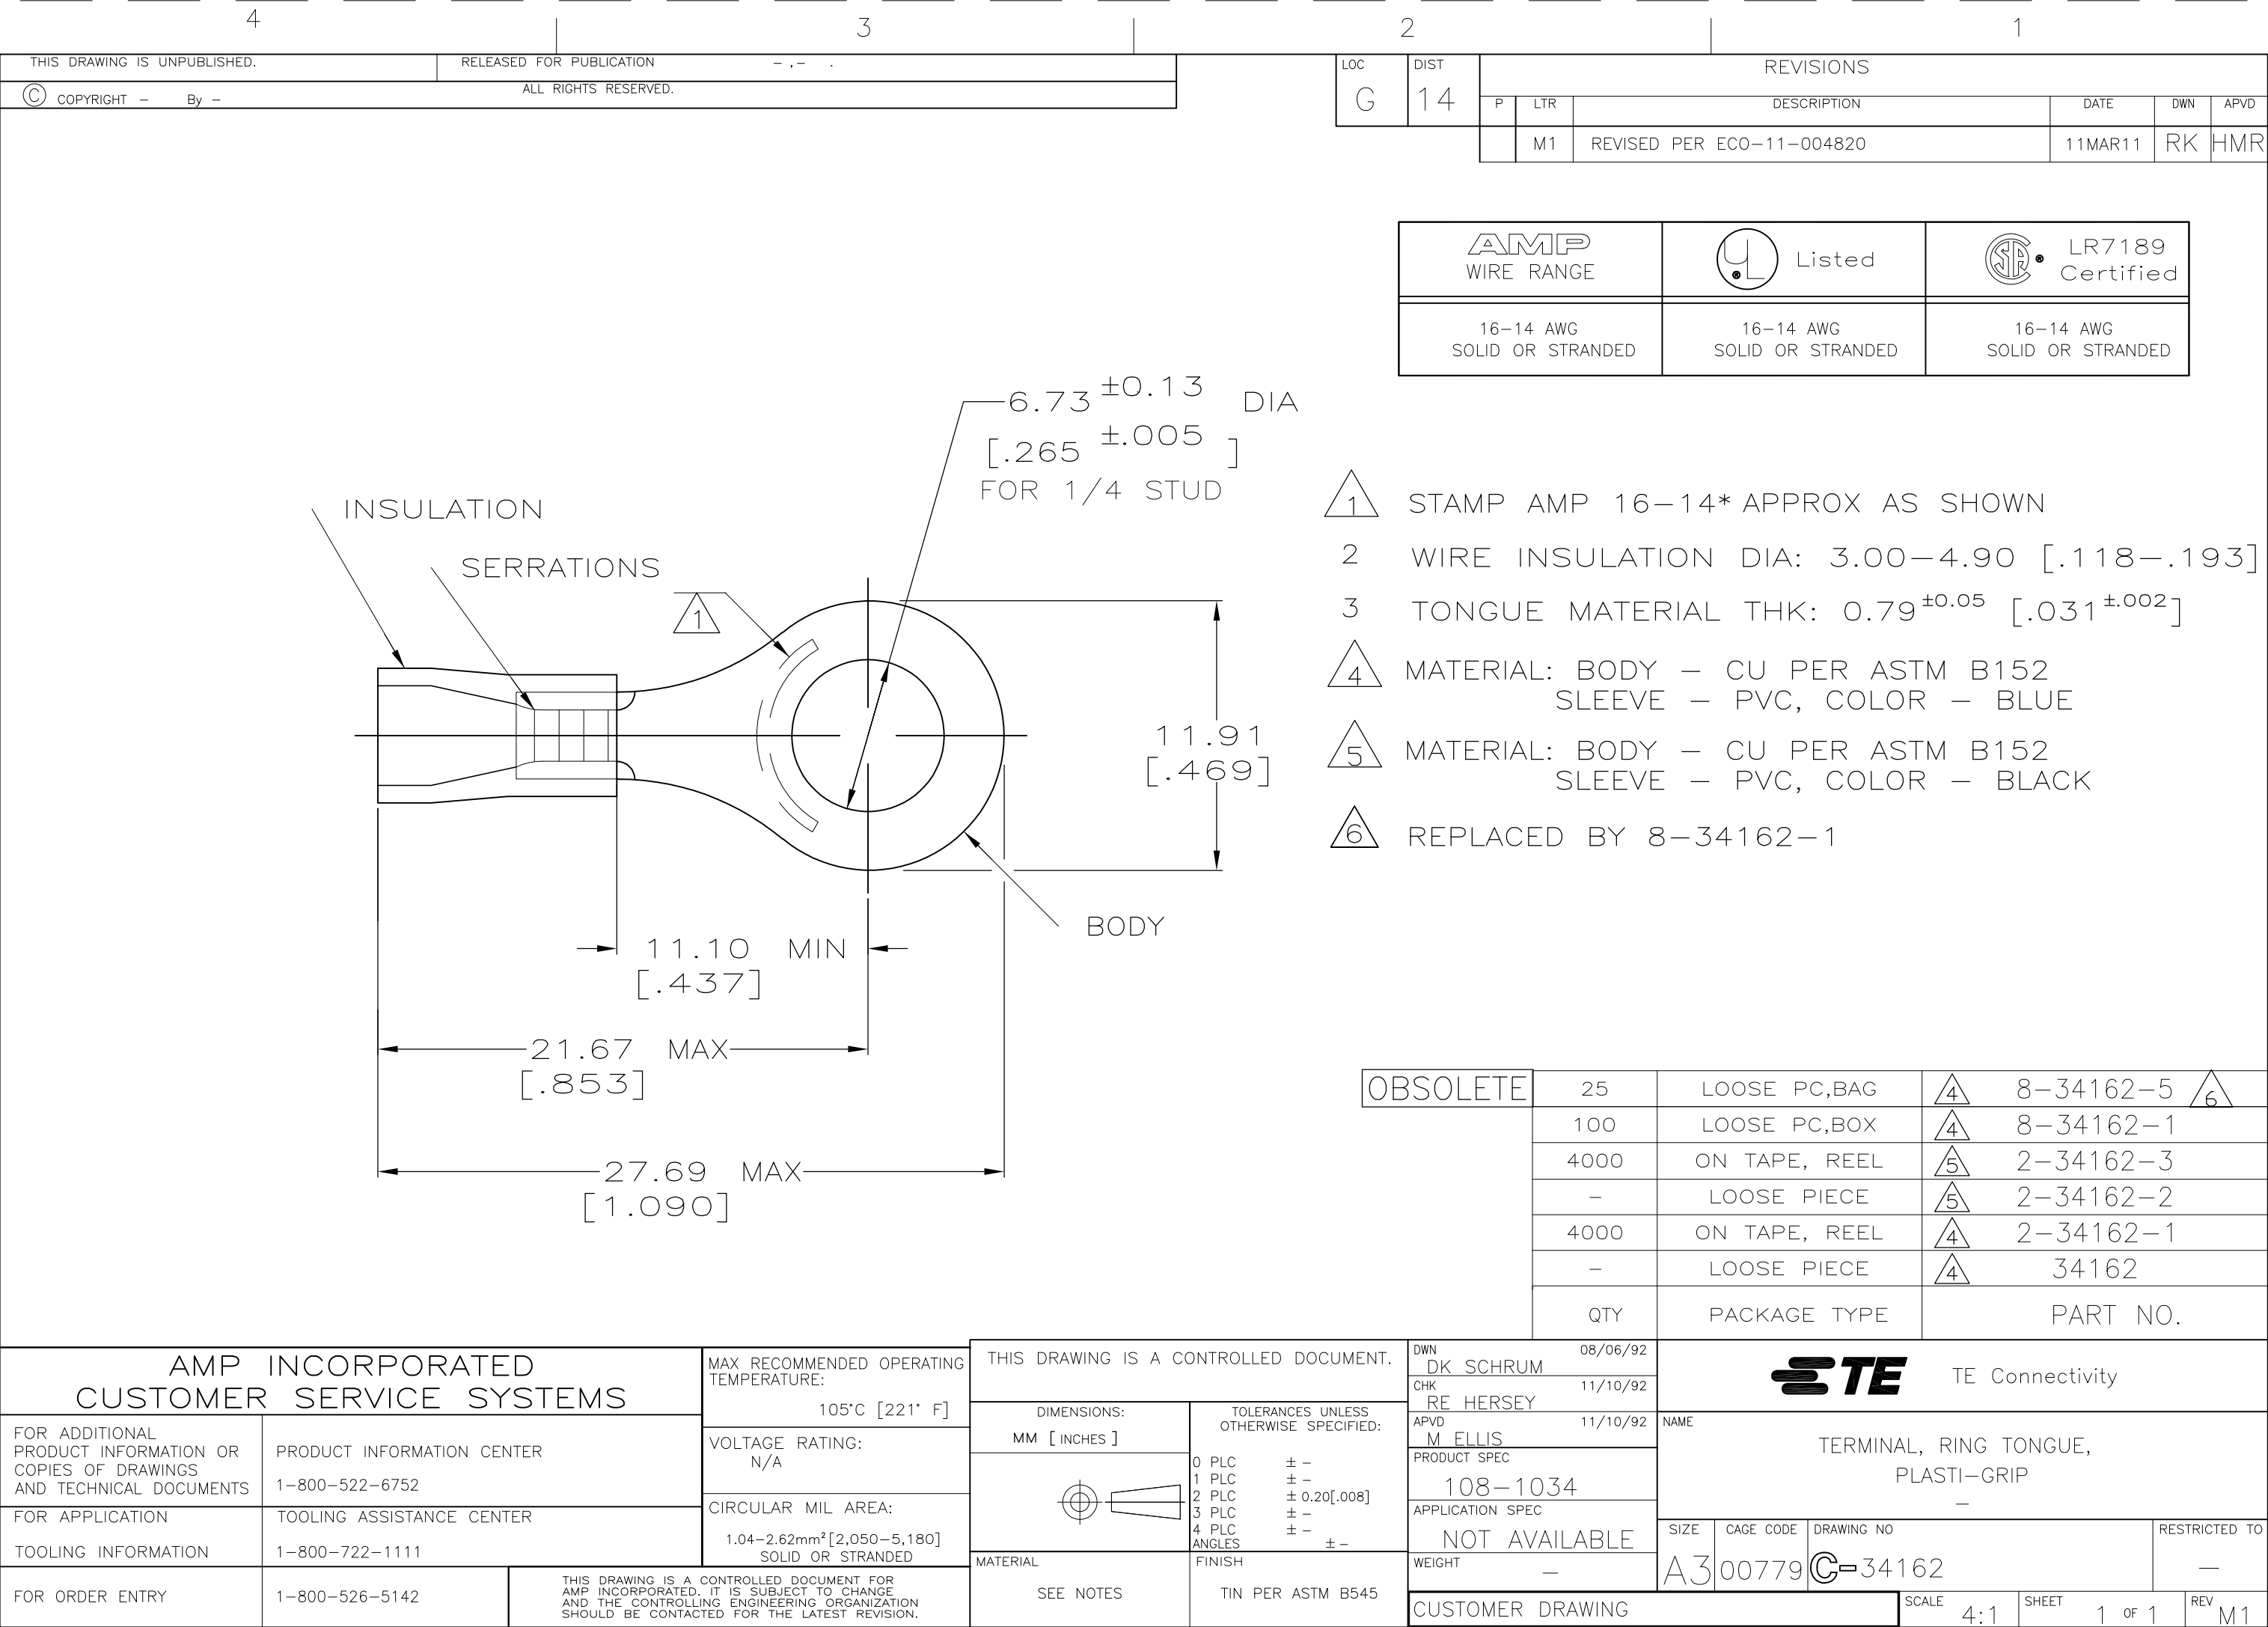

INSULATION

SERRATIONS

1

6.73 ±0.13 DIA
[.265 ±.005]
FOR 1/4 STUD

11.91
[.469]

11.10 MIN
[.437]

21.67 MAX
[.853]

27.69 MAX
[1.090]

BODY

1

2

3

4

5

6

STAMP AMP 16-14* APPROX AS SHOWN

WIRE INSULATION DIA: 3.00-4.90 [.118-.193]

TONGUE MATERIAL THK: 0.79 ±0.05 [.031 ±.002]

MATERIAL: BODY - CU PER ASTM B152
SLEEVE - PVC, COLOR - BLUE

MATERIAL: BODY - CU PER ASTM B152
SLEEVE - PVC, COLOR - BLACK

REPLACED BY 8-34162-1

OBSOLETE

25

100

4000

-

4000

-

QTY

LOOSE PC,BAG

LOOSE PC,BOX

ON TAPE, REEL

LOOSE PIECE

ON TAPE, REEL

LOOSE PIECE

PACKAGE TYPE

8-34162-5

8-34162-1

2-34162-3

2-34162-2

2-34162-1

34162

PART NO.

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

FOR APPLICATION
TOOLING INFORMATION

FOR ORDER ENTRY

PRODUCT INFORMATION CENTER
1-800-522-6752

TOOLING ASSISTANCE CENTER
1-800-722-1111

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
105°C [221° F]

VOLTAGE RATING:
N/A

CIRCULAR MIL AREA:
1.04-2.62mm² [2,050-5,180]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM [INCHES]

MATERIAL
SEE NOTES

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.20[.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH
TIN PER ASTM B545

DWN
DK SCHRUM
08/06/92

CHK
RE HERSEY
11/10/92

APVD
M ELLIS
11/10/92

PRODUCT SPEC
108-1034

APPLICATION SPEC
NOT AVAILABLE

WEIGHT
-

CUSTOMER DRAWING

STE

TE Connectivity

NAME
TERMINAL, RING TONGUE,
PLASTI-GRIP
-

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-34162

RESTRICTED TO
-

SCALE
4:1

SHEET
1 OF 1

REV
M1

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-34162-3](#)