

High Frequency Ceramic Solutions

Preliminary

2.6 GHz Band Pass Filter

P/N 2598BP39A0205

Detail Specification: 01/19/09

Page 1 of 2


General Specifications

Part Number	2598BP39A0205	
Frequency (MHz)	2495 - 2700	
Insertion Loss	3 dB max.	
Return Loss	9.5 dB min.	
Attenuation (min.)	2039 - 2244 MHz	12 dB
Attenuation (min.)	2951 - 3156 MHz	24 dB
Attenuation (min.)	4990 - 5400 MHz	12 dB

Impedance	50 Ω
Input Power	500 mW max.
Operating Temperature	-40 to +85°C
Storage Temperature	+5 ~ +35°C, Humidity 45~75%RH, 12 mos. Max
Reel Quantity	3,000


Mechanical Dimensions

	In	mm
L	0.098 $\pm$ 0.008	2.50 $\pm$ 0.20
W	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20
T	0.035 $\pm$ 0.004	0.90 $\pm$ 0.10
a	0.012 $\pm$ 0.008	0.30 $\pm$ 0.20
b	0.024 $\pm$ 0.008	0.60 $\pm$ 0.20
c	0.012 $\pm$ 0.008	0.30 $\pm$ 0.20

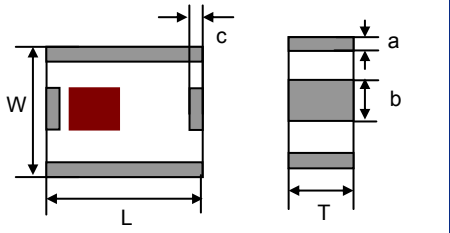

Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN




Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

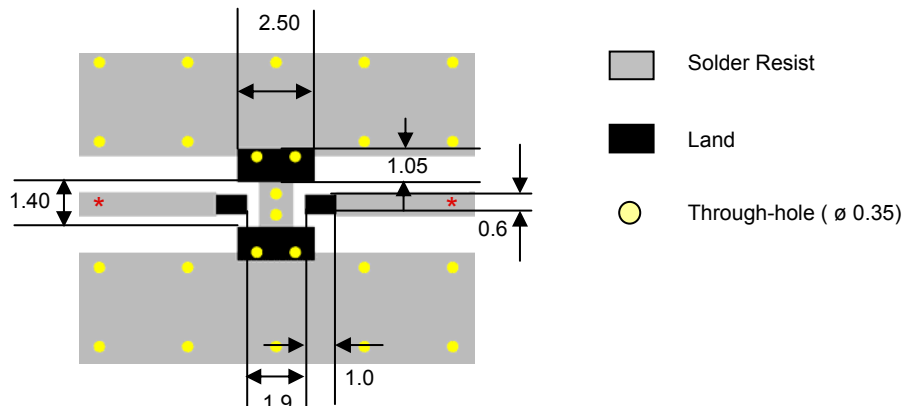

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved

Preliminary

High Frequency Ceramic Solutions


2.6 GHz Band Pass Filter

P/N 2598BP39A0205

Detail Specification: 01/19/09

Page 2 of 2

Typical Electrical Performance (T=25°C)

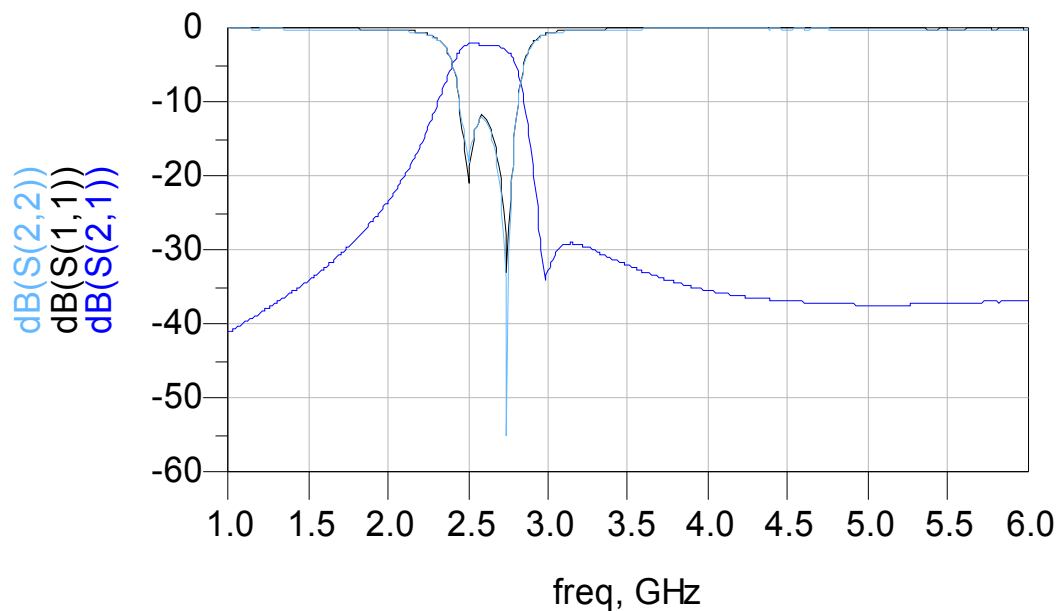

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[2598BP39A0205E](#)