




Quality Products. Service Excellence.

Pulse Encapsulated PC Board Mount 600-602 Series




Note: This product line will soon be discontinued as a stocked series. Available while quantities last. For alternative solution assistance, please contact Hammond Customer Service - sales@hammfg.com or USA (716) 630-7030, Canada and International (519) 822-2960.

Features



- These ferrite cored transformers are fully encapsulated in a high grade black molded case with a UL94V-O rating.
- Used in digital and data processing, line coupling, matching, isolation etc.
- Working voltage rating maximum of 500V D.C.
- ET values up to 50V uS.
- This series is now obsolete - available until stock is depleted.

Gallery

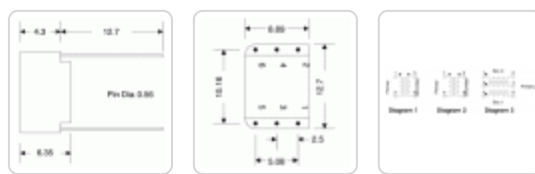

Part No.	Turns Ratio +/- 2%	Primary Inductance uH (min)	Primary ET Constant V uS	Maximum Interwinding Capacitance pf. Ref.	Leakage Inductance uH max.	D.C. Resistance Ohms max.	Circuit Diagram
600BA	1:1	492	8.5	20	0.3	0.8	A
600PA	1:1	323	7	12	0.3	0.6	B
602GA	2:1	2.7	3	3	0.9	0.2	B
601A	1:1	1916	17.5	49	0.6	1.5	B
601B	1:1	492	8.5	22	0.3	0.8	B
601C	1:1	219	5.5	12	0.25	0.5	B
601D	1:1	50	4	10	0.2	0.4	B
601E	1:1	23	2.5	8	0.2	0.3	B
601F	1:1	9.5	6	10	0.2	0.4	B
602A	1:1:1	2060	17.5	72	0.6	1.5	C
602B	1:1:1	492	8.5	20	0.3	0.8	C
602C	1:1:1	219	5.5	12	0.25	0.5	C

Data subject to change without notice

© 2018. Hammond Manufacturing Ltd. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[601C](#) [601A](#) [602C](#) [602A](#) [601D](#) [601E](#) [601F](#) [601B](#) [602B](#) [600PA](#) [602GA](#)