MH Ceramic Capacitor



Lead Free Ceramic Capacitor in Molded SM Leadframe



The MH components use a X7R high capacitance value ceramic capacitor in a surface mount precision made moulded case.

The MH capacitor combine the ceramic attributes of very low ESR, non-polar construction, excellent high frequency behaviour and voltage stress capabilities and wide temperature range; with the enhanced mechanical protection of a moulded case. The moulded case is UL94 V-0 flame retardant and the MH is RoHs and also AEC-Q200 compliant.


The MH range provides a lead frame solution to customers who have previously been unable to use large case ceramic capacitors because of mechanical stressing concerns.

For those applications where a tin termination is not acceptable, a Tin/Lead termination is available.

FEATURES

- Capacitance: 2.2u F 22 μF
- MHs are AEC-Q200 compliant
- Voltage Range DC: 25V 100V
- Enhanced thermo mechanical stress resistance.

HOW TO ORDER

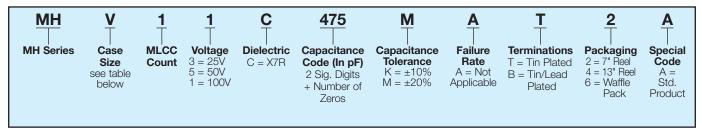


MH X7R RANGE

	Cap µF	25V	50V	100V
225	2.2			
335	3.3			
475	4.7			
685	6.8			
106	10			
156	15			
226	22			

"V" CASE DIMENSIONS: millimeters (inches)

L	7.3±0.2 0 (0.287 ±0.008)		
w	6.1 + 0.20 - 0.10		
	(0.24 + 0.008 - 0.004)		
н	3.45±0.30 (0.136±0.012)		
W ₁	3.1±0.20 (0.120±0.008)		
Δ	1.4 + 0.30 - 0.20		
	(0.055 + 0.012 - 0.008)		
S Min	4.40 (0.173)		



PACKAGING QUANTITY

7" Reels	400
13" Reels	1500
Waffle Pack	108





TS 16949, ISO 14001 Certified Manufacture



Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.avx.com/SpiApps/default.asp#spicalci



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

 MHV15C475MAT2A
 MHV15C106MAT2A
 MHV11C105MAT2A
 MHV11C155MAT2A
 MHV13C106MAT2A

 MHV13C226MAT2A
 MHV11C225MAT2A
 MHV15C685KAB2A
 MHV13C106MAT2A
 MHV13C106MAT2A