


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/15/09	XXXXXX	INITIAL RELEASE

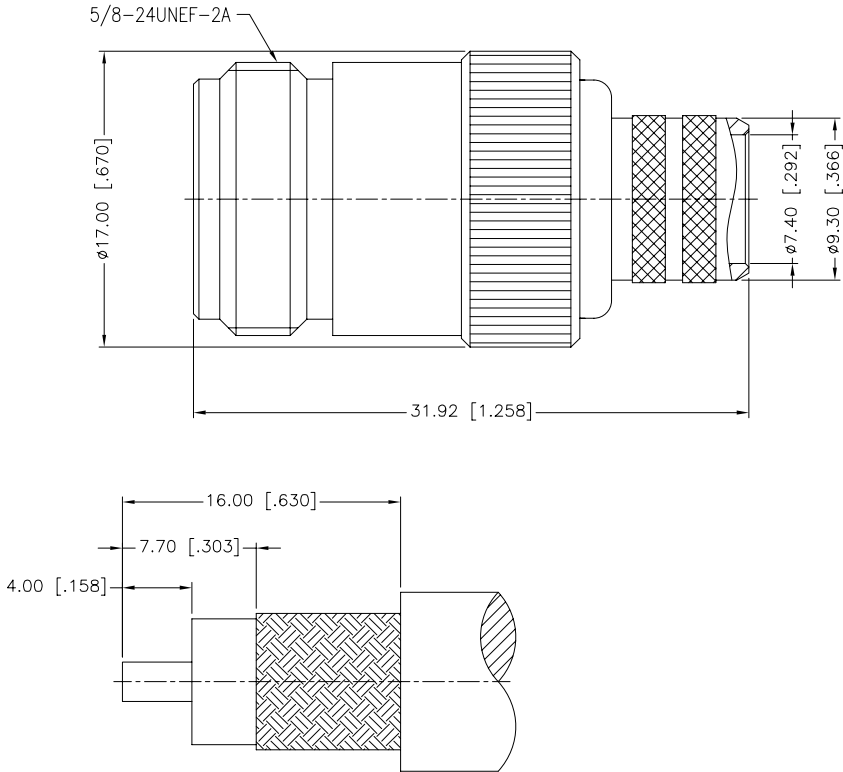

RECOMMENDED
CABLE STRIPPING DIM'S

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex															
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN J.CHENG		09/15/09																	
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CHECKED																			
							ISSUED				PART DESCRIPTION															
							SHEET 1 OF 1				N CRIMP JACK															
5	FERRULE	BRASS	ALBALOY	1							PART NO.															
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1							172209															
3	BARREL	BRASS	ALBALOY	1																						
2	INSULATOR	PTFE	NATURAL	1																						
1	BODY	BRASS	ALBALOY	1																						
DESCRIPTION					MATERIAL		FINISH		QTY		DO NOT SCALE DRAWING		CAD FILE		C:/CONNEX/172209.DWG		DWG. NO.		172209.DWG		REV. NC		SIZE A		SCALE NA	

5	FERRULE	BRASS	ALBALOY	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	BARREL	BRASS	ALBALOY	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	ALBALOY	1
	DESCRIPTION	MATERIAL	FINISH	QTY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[172209](#)