


PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

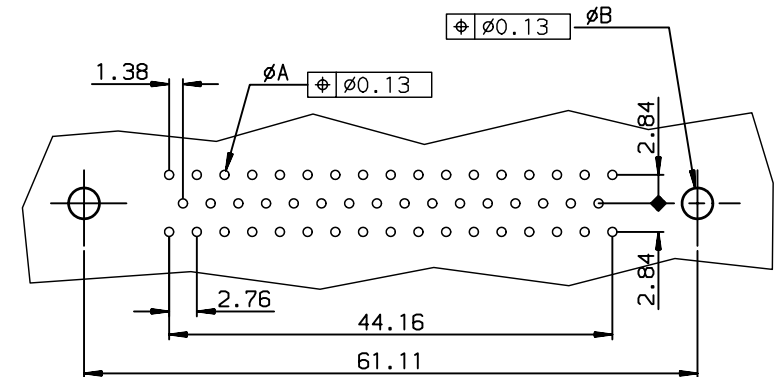

TIN LEAD PART NUMBER

PART NUMBER	
flash gold	D50S91C4PV00
0.76µ gold	D50S91C6PV00

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S91C4PV00LF
0.76µ gold	D50S91C6PV00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

rev	ecn no	dr	date
A	-	JOU	1996/08/12
B	LS05-004	MPE	2005/02/11
C	LS06-0095	LGO	2006/06/29
D	LS06-0140	LGO	2006/09/22
E	LS08-0217	MPE	2008/11/25
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm	mm	
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	size A3	Scale 2	
Dr	JOUBERT	1996/08/12	0.X	±0.1	ECN LS08-0217	
Eng	PESSON	1996/08/12	0.XX	±0.1	Spec ref -	
Chr	LEGARE	1996/08/12	0.XXX	±0.1	Product family D-SUB	
Appr	LEGARE	1996/08/12	Product family D-SUB		Spec ref -	
FCi		FEMALE CONNECTOR DELTA D STD EUROPE		dwg no C01-8646-0478		Rev. E
title STRAIGHT PRESS-FIT.		catalog no -		CUSTOMER		sheet 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D50S91C4PV00LF](#) [D50S91C6PV00LF](#) [D50S91C4PV00](#) [D50S91C6PV00](#)