


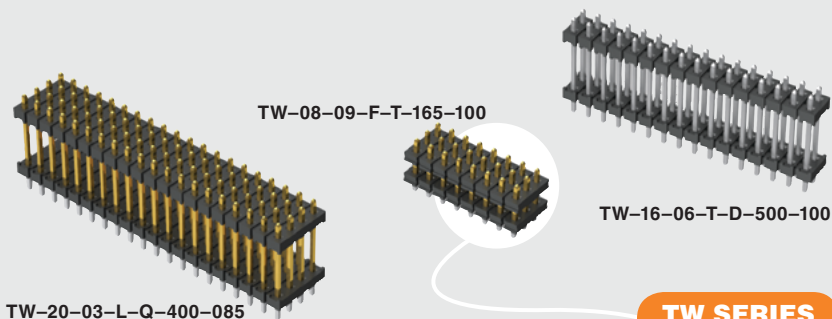

TW SERIES

THROUGH-HOLE BOARD STACKERS

- Choice of one through six rows

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	TAIL SPEC																										
	02 thru 50	Specify LEAD STYLE from chart below.	-F = Gold flash on post, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row -T = Triple Row -Q = Four Row -5 = Five Row -6 = Six Row	-“XXX” = Stacker Height in inches (0.13 mm) .005 increments Example: -.250 = (.635 mm) .250" <table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr><td>-01</td><td>(8.20) .323</td></tr> <tr><td>-02</td><td>(9.60) .377</td></tr> <tr><td>-03</td><td>(13.60) .535</td></tr> <tr><td>-04</td><td>(14.10) .555</td></tr> <tr><td>-05</td><td>(15.10) .594</td></tr> <tr><td>-06</td><td>(17.10) .673</td></tr> <tr><td>-07</td><td>(19.10) .751</td></tr> <tr><td>* -08</td><td>(21.10) .830</td></tr> <tr><td>* -09</td><td>(11.60) .456</td></tr> <tr><td>-10</td><td>(15.60) .614</td></tr> <tr><td>-11</td><td>(10.08) .397</td></tr> <tr><td>* -12</td><td>(28.19) 1.110</td></tr> </tbody> </table> * Style -08 & -12 = S & D only	LEAD STYLE	OAL	-01	(8.20) .323	-02	(9.60) .377	-03	(13.60) .535	-04	(14.10) .555	-05	(15.10) .594	-06	(17.10) .673	-07	(19.10) .751	* -08	(21.10) .830	* -09	(11.60) .456	-10	(15.60) .614	-11	(10.08) .397	* -12	(28.19) 1.110	-“XXX” = Tail Length in inches (0.13 mm) .005 increments Example: -150 = (3.81 mm) .150" -“XXX” = Polarized Position (Specify position to be removed)
LEAD STYLE	OAL																															
-01	(8.20) .323																															
-02	(9.60) .377																															
-03	(13.60) .535																															
-04	(14.10) .555																															
-05	(15.10) .594																															
-06	(17.10) .673																															
-07	(19.10) .751																															
* -08	(21.10) .830																															
* -09	(11.60) .456																															
-10	(15.60) .614																															
-11	(10.08) .397																															
* -12	(28.19) 1.110																															

The diagram includes two technical drawings. The top drawing shows a side view of a lead assembly with dimensions: (2.00) .0787 TYP for the lead height, 01 for the first pin, 04 for the fourth pin, 300 for the total length, and 295 for the base length. It also indicates 'No. of rows X (2.00) .0787'. The bottom drawing shows a top view of the lead assembly with dimensions: (0.51) .020 SQ for the pitch, (0.00) .000 MIN for the tail width, (2.00) .0787 for the lead width, and (1.27) .050 MIN for the stacker height. It also labels 'POST' and 'TAIL'.

*All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[TW-02-05-T-S-405-095](#)