
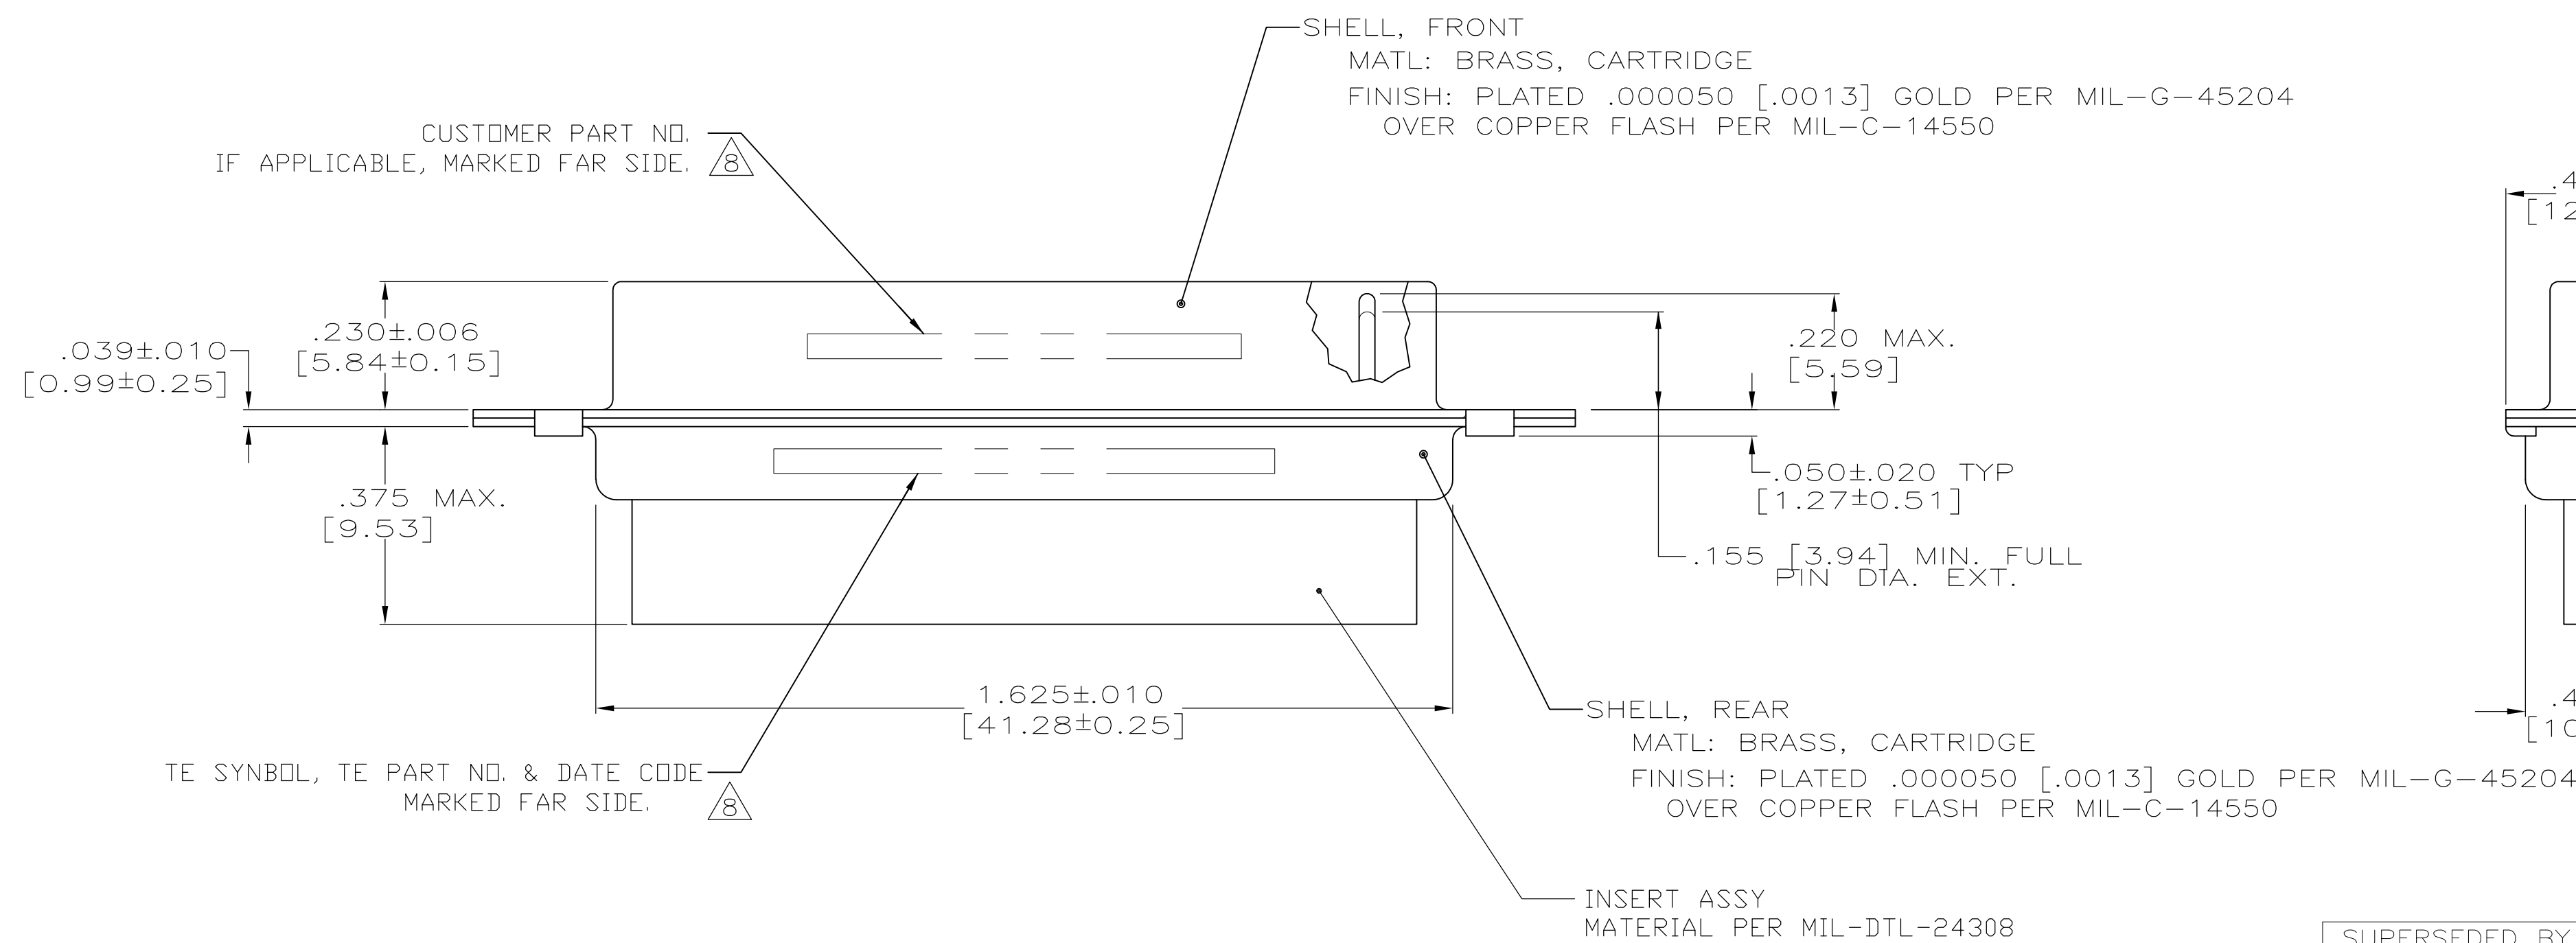


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		P		REV PER ECO 15-016064	11-9-15	CT	CD

1. THIS PLUG WILL MATE WITH ANY RECEPTACLE CONNECTOR WITH SAME INSERT ARRANGEMENT AS DEFINED BY MS18275-1.
2. MAXIMUM WIRE INSULATION USED WITH THIS PLUG IS .072 [1.83] DIA. MAX.
3. Be-Cu RETENTION CLIPS ARE INCLUDED IN INSERTS.
4. UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.
5. RESTRICTED TO CAE ELECTRONICS ONLY.
6. THESE CONNECTORS ARE QUALIFIED TO GODDARD SPACE FLIGHT CENTER SPECIFICATION S-311-P-4.
7. CONTACT NOT INCLUDED - SHOWN FOR DIMENSIONAL REFERENCE ONLY.
8. FAR SIDE REFERS TO WIDE SIDE OF KEYSTONE.

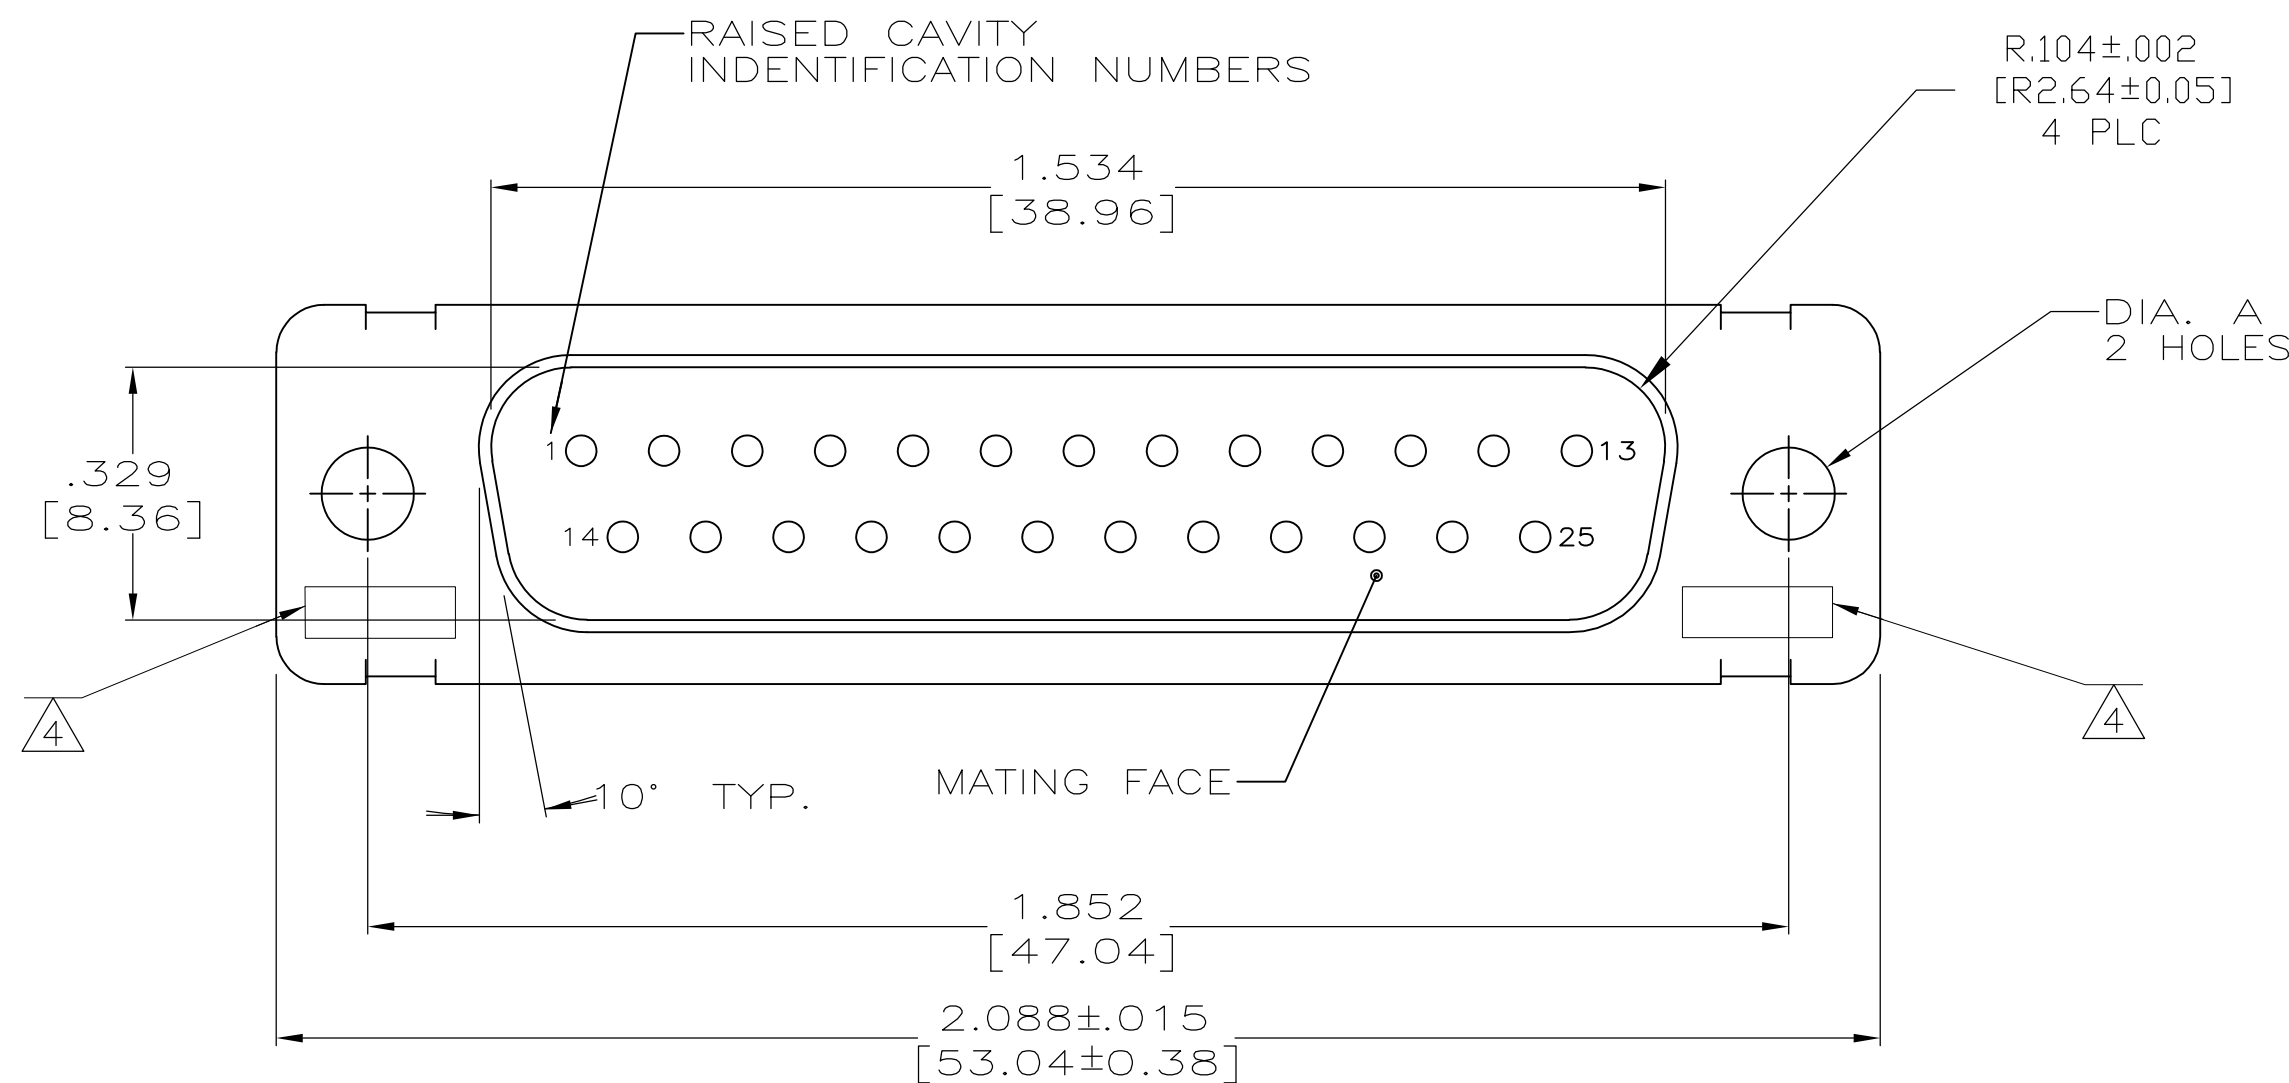

SUPERSEDED BY 1996076-3		.120	[3.05]	8333648P4	206800-8	206800-8
		.120	[3.05]	570513-8	206800-7	206800-7
OBSOLETE			.120	[3.05]	311P409-3P-B-12	206800-2
OBSOLETE			.120	[3.05]	---	206800-5
			.120	[3.05]	2A014-003V-001	206800-4
			.154	[3.91]	---	206800-3
			.120	[3.05]	311P409-3P-B-12	206800-2
			.154	[3.91]	311P409-3P-B-15	206800-1
REMARKS		DIA A		CUSTOMER P/N ON CONNECTOR	TE P/N ON CONNECTOR	AMP P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. CLOUSER 1-3-89 QWK A. EMADI 1-6-89 APP'D A. EMADI 1-6-89		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0.015 ± .005 0.030 ± .005 0.060 ± .005 0.125 ± .005 ANGLES ± .030°		NAME AMPHILITE NONMAGNETIC PLUG ASSEMBLY WITHOUT SIZE 20 PIN CONTACTS, SERIES 109, SHELL SIZE 3, 25 POSITION	
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS		SIZE A1	
		WEIGHT —		GAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-206800	
		SCALE 4:1		SHEET 1 OF 1	
		REV P			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[206800-1](#)