

PRODUCT NUMBER
98400-YXXXLF

RoHs COMPATIBLE, SEE NOTE 6

PACKAGING TYPE, NOTE 3

PLATING

1= 0.76µm GOLD/GXT ON CONTACT
AREA, 2µm TIN MIN ON TAILS

1.27µm NICKEL MIN UNDERLAYER FOR
ALL PLATING VERSIONS

STYLE	SIZE	MATING	OMIT PIN
01	1x08	5.9	2
02	1x08	5.9	5

NOTES:

- 1 - HOUSING MAT'L : HIGH TEMPERATURE
THERMOPLASTIC. UL94V-0 COLOR: BLACK
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PACKAGING
= POLY BAGS
A = TAPE & REEL + CAP, AS AVAILABLE
- 4 - 9N MIN RETENTION IN EITHER DIRECTION
- 5 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS
EXAMPLE : 8 POS N x 2.54 = 20.32mm

6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.



b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR 30 SECONDES
IN A CONVECTION, INFRA-RED OR VAPOR
PHASE REFLOW OVEN.

c - LABELING:

- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-47-0004

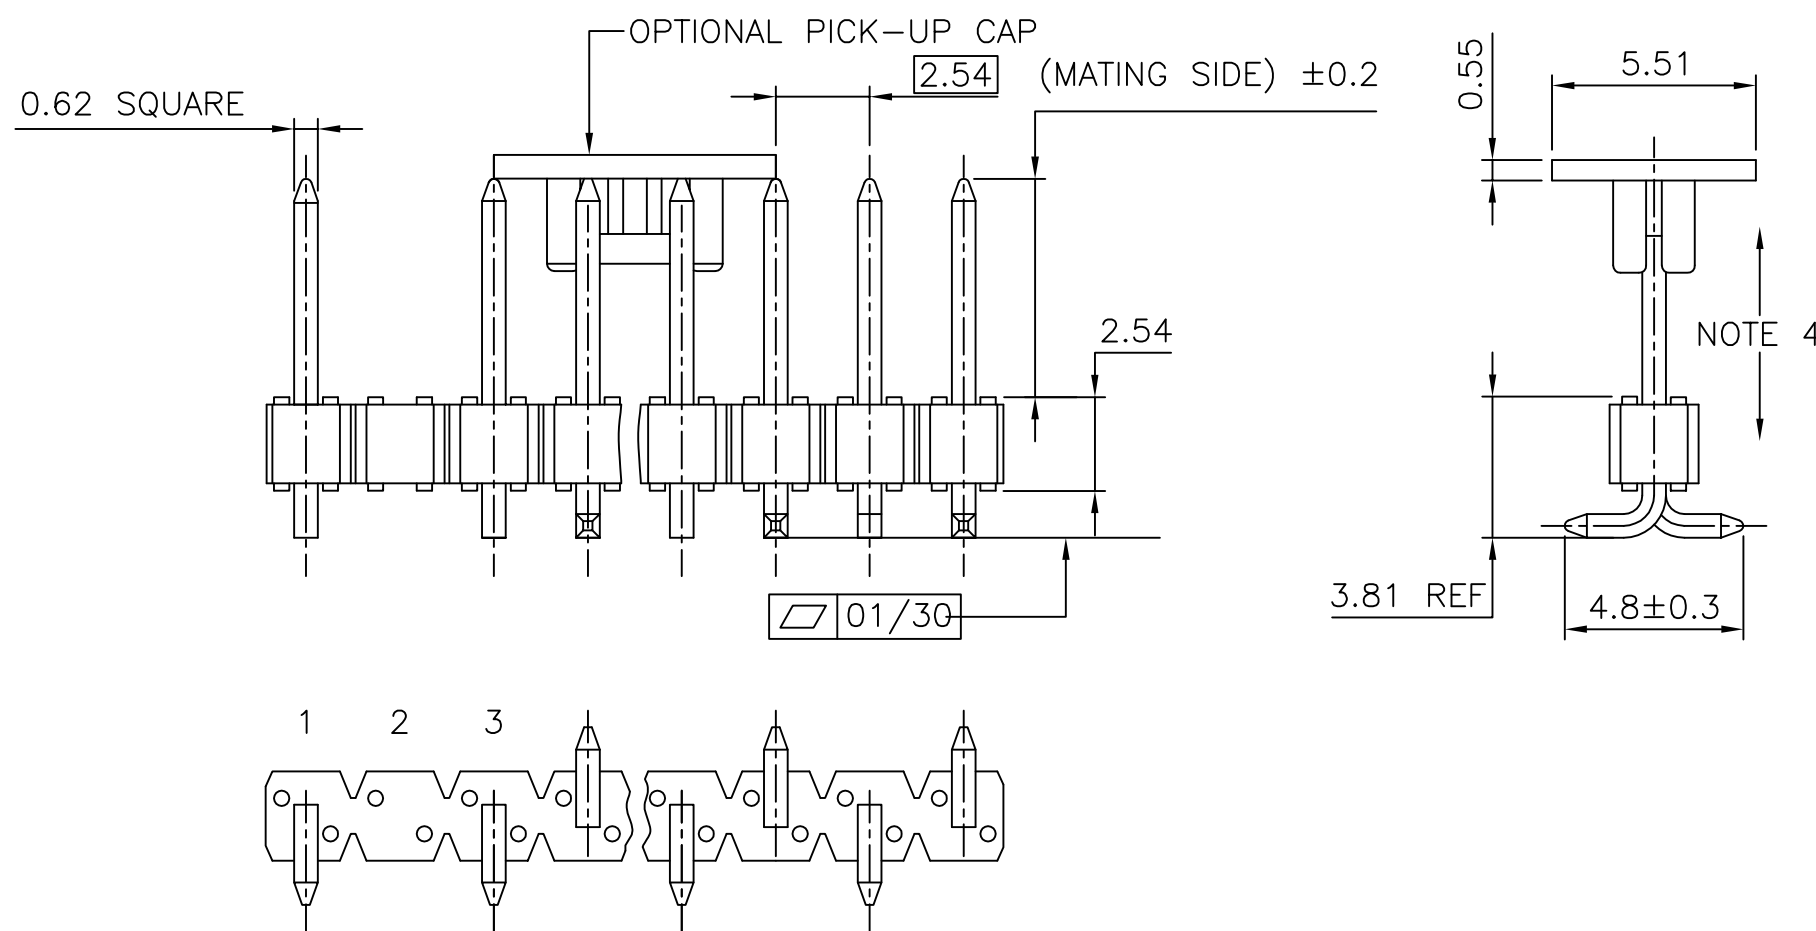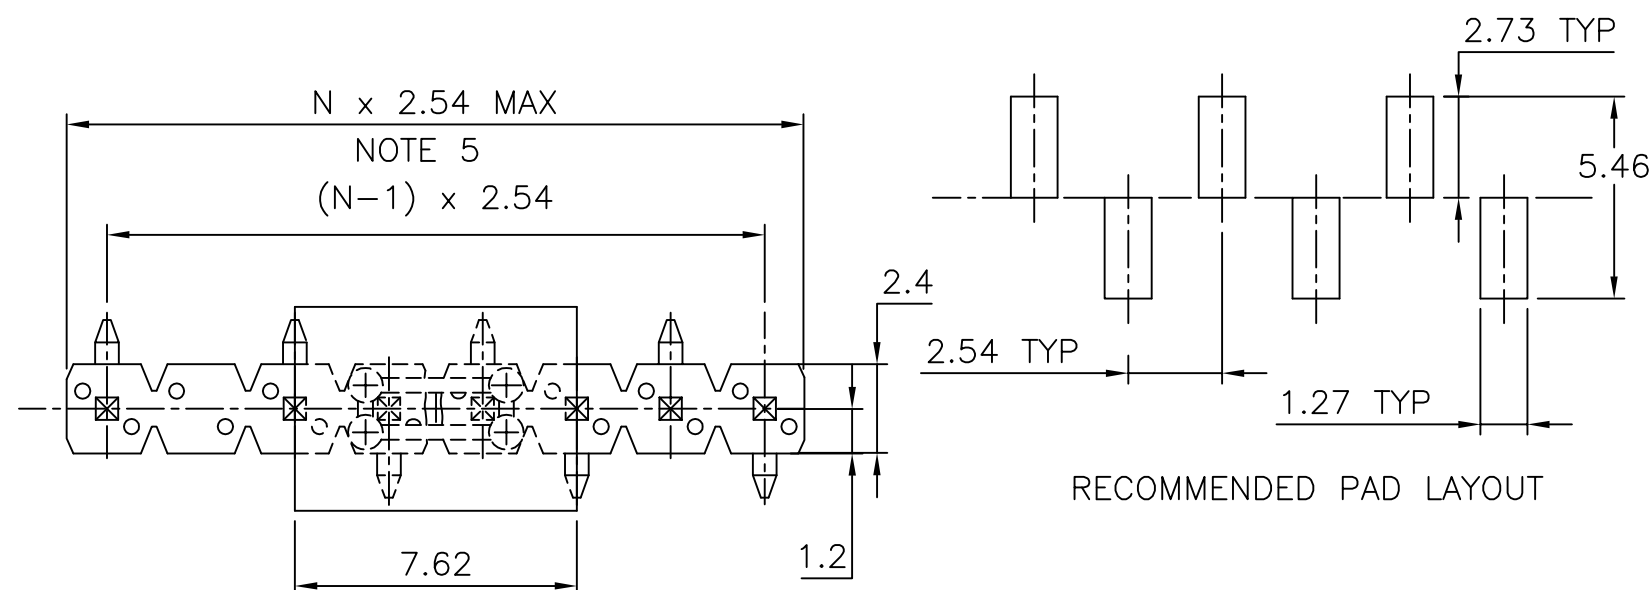

mat'l. code SEE NOTES				surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family BSTIK HDR
ltr	ecn no	dr	date	tolerances unless	otherwise specified		title
H	F-23055	AMA	16.01.15	angles	linear		HEADER SR, SMT, POLARIZED
C	F04-0362	JCO	04.12.10			scale 1:4	
D	F06-0208	JCO	06.06.22	dr	L.MULIN	99.04.28	dwg no
E	F08-0148	RTR	08.03.31	enr	JMC	99.04.28	sheet 1 of 1
F	F10-0207	JCO	10.09.09	chr			size
G	B-18983	LMU	14.10.03	appd	JMC	99.04.28	A3
sheet index	revision sheet						type
							CUSTOMER
							Drawing

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[98400-101ALF](#) [98400-102ALF](#)