



The IP-50 provides easy and direct connection to products using networks and the Internet.

The IP-50 come with a standard Ethernet connection, RS-232 interface and on-board fully programmable and customizable web server. It can be used to control and monitor any RS-232 device remotely.

Users can design and setup their own user interface and functionality or access the expanding portfolio of standard product packages from www.digitalview.com/ip-50 website.

Applications include:

- ✓ Digital Signage installations
- ✓ Industrial systems monitoring and control
- ✓ Environmental monitoring
- ✓ Control and monitoring of Digital View products

SPECIFICATION

Network Interface

Ethernet 10BaseT
RJ-45 connector x 1
Supported protocols: IP, TCP, DHCP

RS-232 Interface

DB9-Female connector x 1
Serial baud rate: 2400
Date bits: 8
Parity : none
Stop bits: 1
RS-232: TxD, RxD

Power

Power input : 7.5V DC
Power consumption : 200mA @ 7.5V

Environmental


Operating temperature : 0°C to 50°C
Relative humidity : 5%-95% relative humidity
(Non-condensing)

Dimension

Dimension (W x D x H) : 86mm x 69mm x 24.5mm

Weight

Weight (net) : 130g

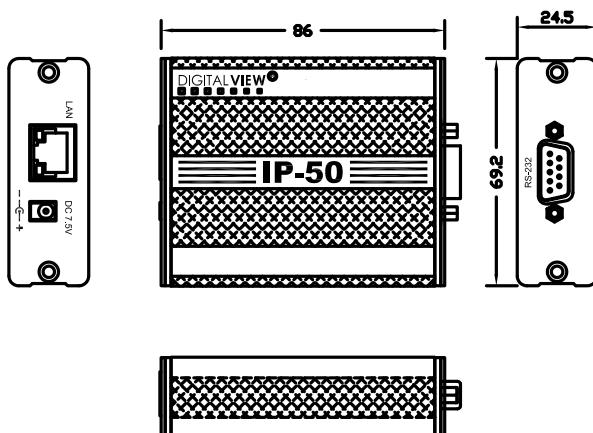

Brand names belong to their respective owners. Specifications subject to change without notice. August 2007

ASIA

Digital View Ltd.
19th floor Tai Tung Building
8 Fleming Road
Wanchai, Hong Kong

Tel: (852) 2861 3615
Fax: (852) 2520 2987
Email: sales@digitalview.com

USA

Digital View Inc.
18440 Technology Drive
Building 130
Morgan Hill, CA 95037
USA

Tel: (1) 408-782-7773
Fax: (1) 408-782-7883
Email: sales@digitalview.com

EUROPE

Digital View Ltd.
6 Marylebone Passage,
London, W1W 8EX,
UK

Tel: +44 20-7631-2150
Fax: +44 20-7631-2156
Email: sales@digitalview.com

Please visit our web site for more information: www.digitalview.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digital View:](#)

[586013600-3](#)