




ISO9001:2008 Certified

### Mechanical Specifications (mm)

|   |      |       |
|---|------|-------|
| D:  | 22.0 | ± max |
| T:  | 6.0  | ± max |
| Lead Diameter                             | 1.0  | ± nom |
| S:  | 7.5  | ± nom |
| L:  | 38.0 | ± nom |
| Coating Lead Run Down<br>(straight Leads) | 5.0  | ± max |
| B:  | 9.35 | ± nom |
| C:  | 3.77 | ± nom |

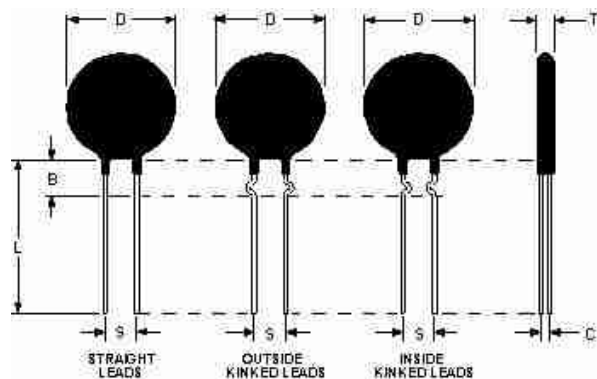

### Electrical Specifications

|                                       |        |        |
|---------------------------------------|--------|--------|
| Resistance:                           | 10.0 Ω | ± 20 % |
| Max Steady State Current upto 65°C:   | 8.00   | A      |
| Max Rec. Energy Rating:               | 90     | J      |
| Actual Failure Instantaneous Energy:  | 200    | J      |
| Maximum Capacitance @ 120 VAC:        | 6,000  | µf     |
| Maximum Capacitance @ 240 VAC:        | 1,400  | µf     |
| Resistance @ 100% Max Current:        | 0.10   | Ω      |
| Resistance @ 50% Max Current:         | 0.19   | Ω      |
| Body Temperature at 100% Max Current: | 182.00 | °c     |
| Dissipation Constant:                 | 32.4   | mw/°c  |
| Thermal Time Constant:                | 122    | Sec.   |
| Material Type (for Beta and Curve):   | H      |        |

| <b>SL22 10008</b>  |                          |
|--|--------------------------|
| Date: 11/11/2008   | Drawn by: Erin Landis    |
| Ametherm, Inc.<br>3111 N. Deer Run Road<br>Carson City, Nevada USA 89701<br>www.ametherm.com | Approved By: Mehdi Samii |
|  | Revision: a              |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SL22 10008](#) [SL22 10008-B](#)