

NOTES:




1 REVERSE REELING FOR USE WITH MINI-APPLICATOR.

2 CRIMPING SPECIFICATION 114-25003.


3 PREPLATED STOCK 0,8µm MIN. GOLD ON CONTACT AREA OVER 1,25µm MIN. NICKEL OVERALL.
ZONE I: 0,5µm MIN. GOLDFLASH.

4 PREPLATED STOCK 0,8µm MIN. GOLD ON CONTACT AREA OVER 1,25µm MIN. NICKEL OVERALL.
GOLDFLASH ON REMAINDER.

5 WIRE RANGE: 28-32 AWG.

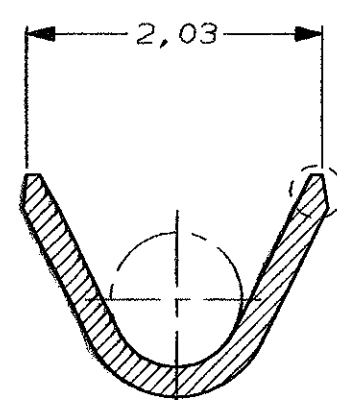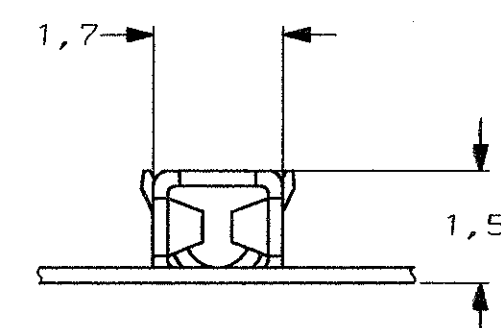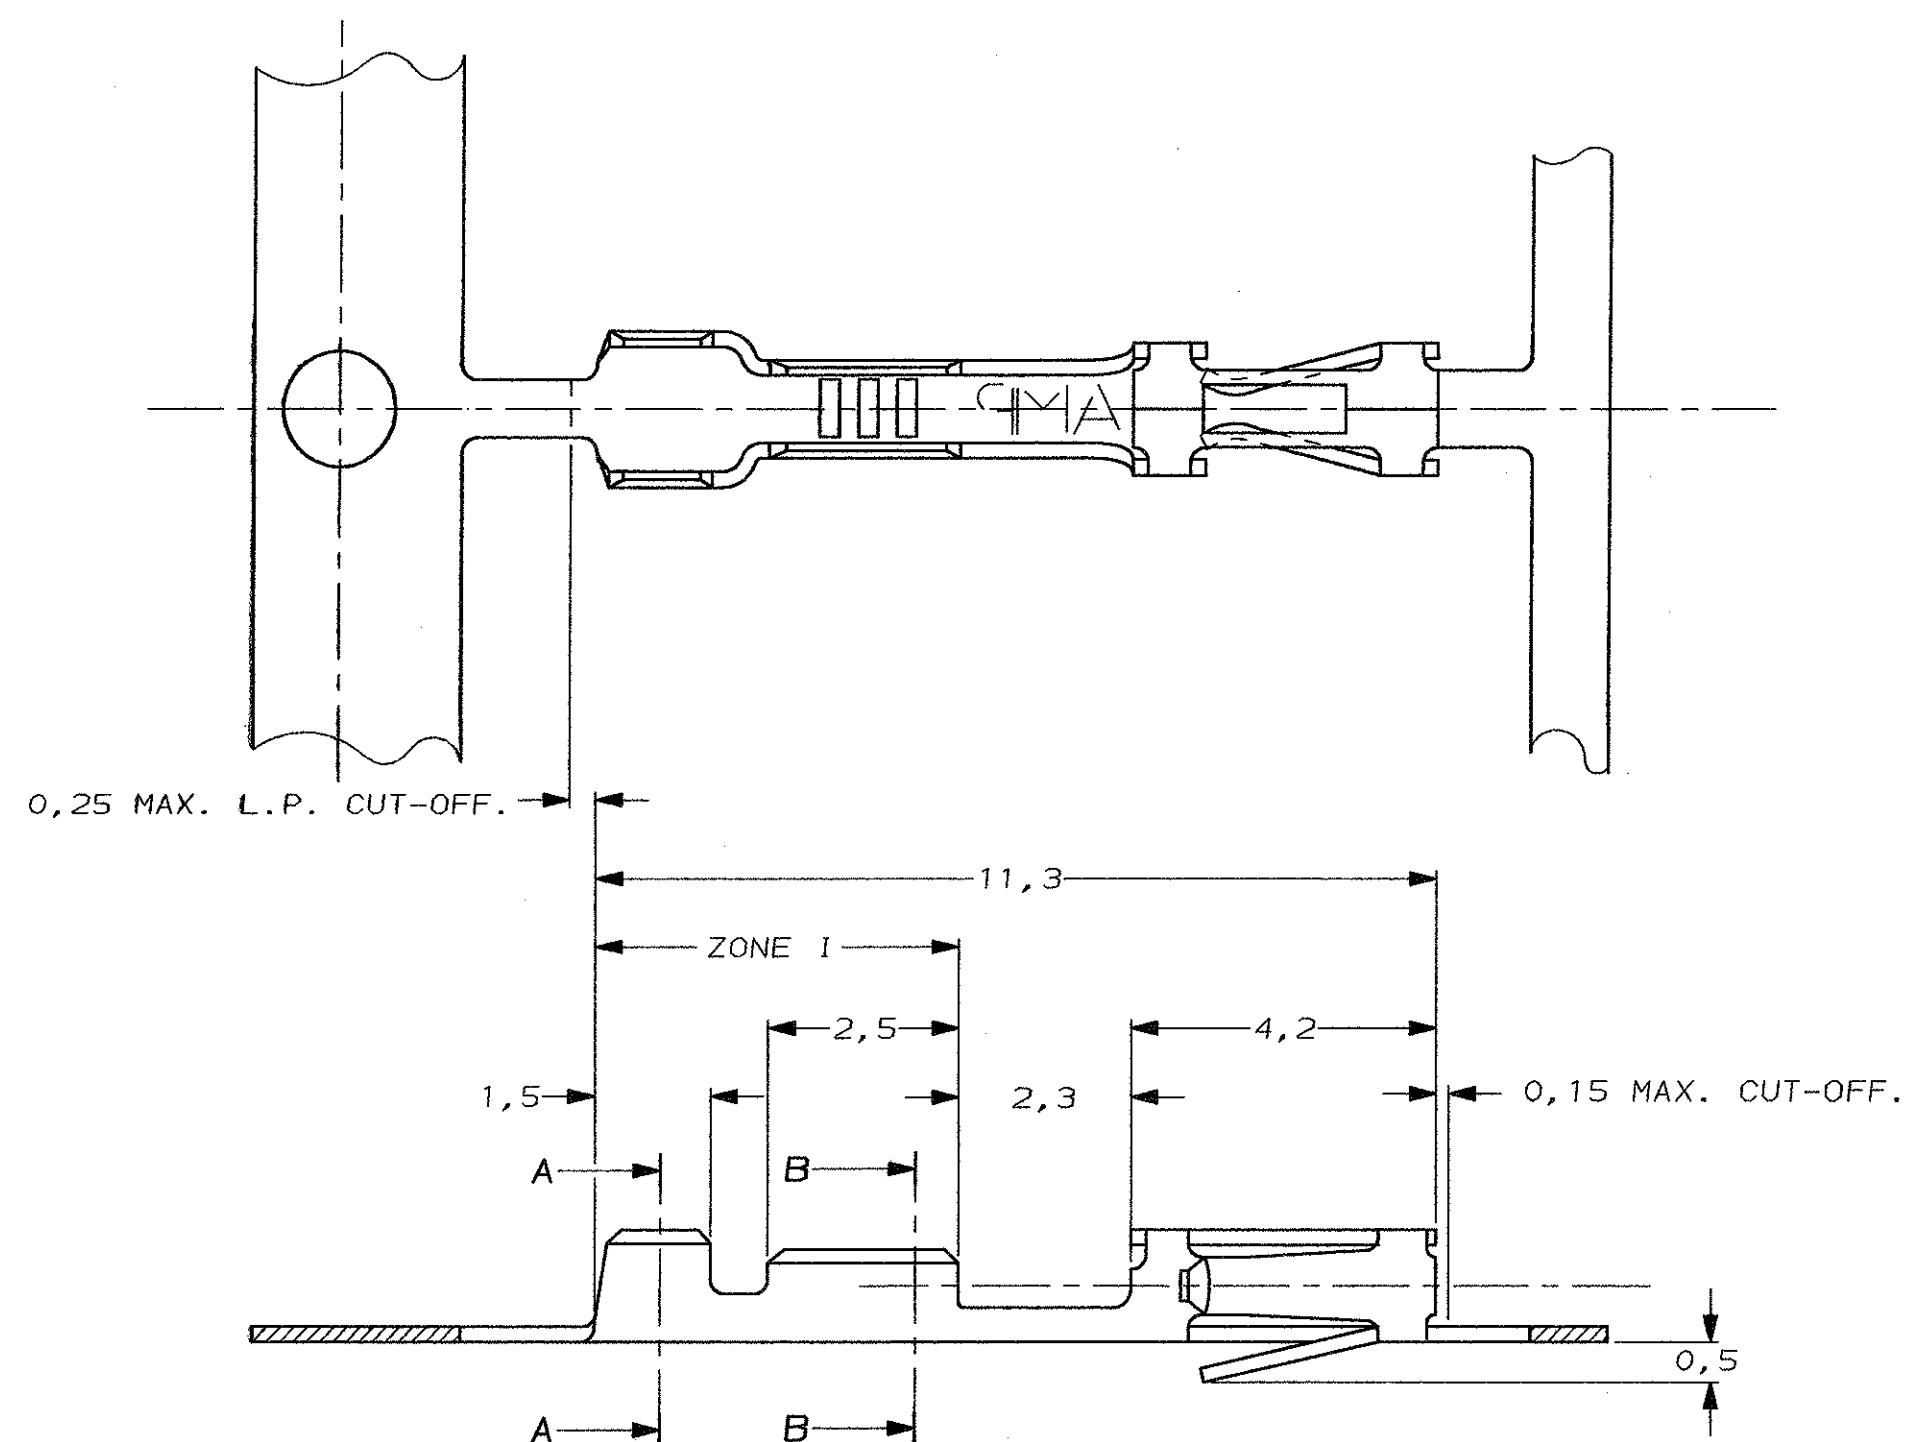

SECTION A-A
SCALE 20:1

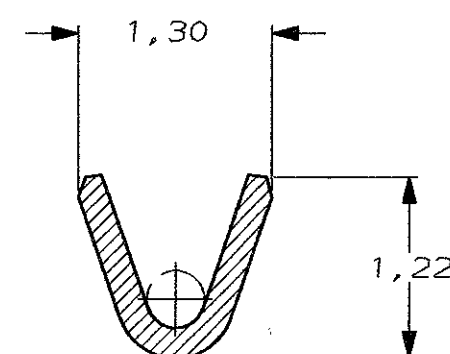

SECTION B-B
SCALE 20:1

SEL. Au/Au FLASH		4	167023-2	167020-2
SEL. Au/Au FLASH		3	167023-1	167020-1
FINISH			LOOSE PIECE NR.	PARTNUMBER
--		--	CUSTOMER DRAWING	
--		--	FOR REFERENCE ONLY	
--		--	WILL NOT BE UPDATED	
--		--	© COPYRIGHT 19- BY AMP HOLLAND B.V.	
--		--	ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE	
--		--	COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.	
--		--	THIS DRAWING IS UNPUBLISHED	
--		--	RELEASED FOR PUBLICATION	
B		EH-2039-98	JvL JvL 03-12-98	AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.
A		EH-0491-93	JvdH D.S. 10-07-93	
LTR.		REVISION RECORD	DR. CHK. DATE	
DR. J.V.D.HEIJDEN		CHK. J.V.LIEMPT	APP. E.LEIJTENS	AMP MODU MOD. IV RECEPTACLE, STRIP.
DATE: 10-07-93		DATE: 19-07-93	DATE: 19-07-93	
DWG. No.		C-167020		REV. LTR.
				B
SHEET		1 OF 1		A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[167020-2](#)