


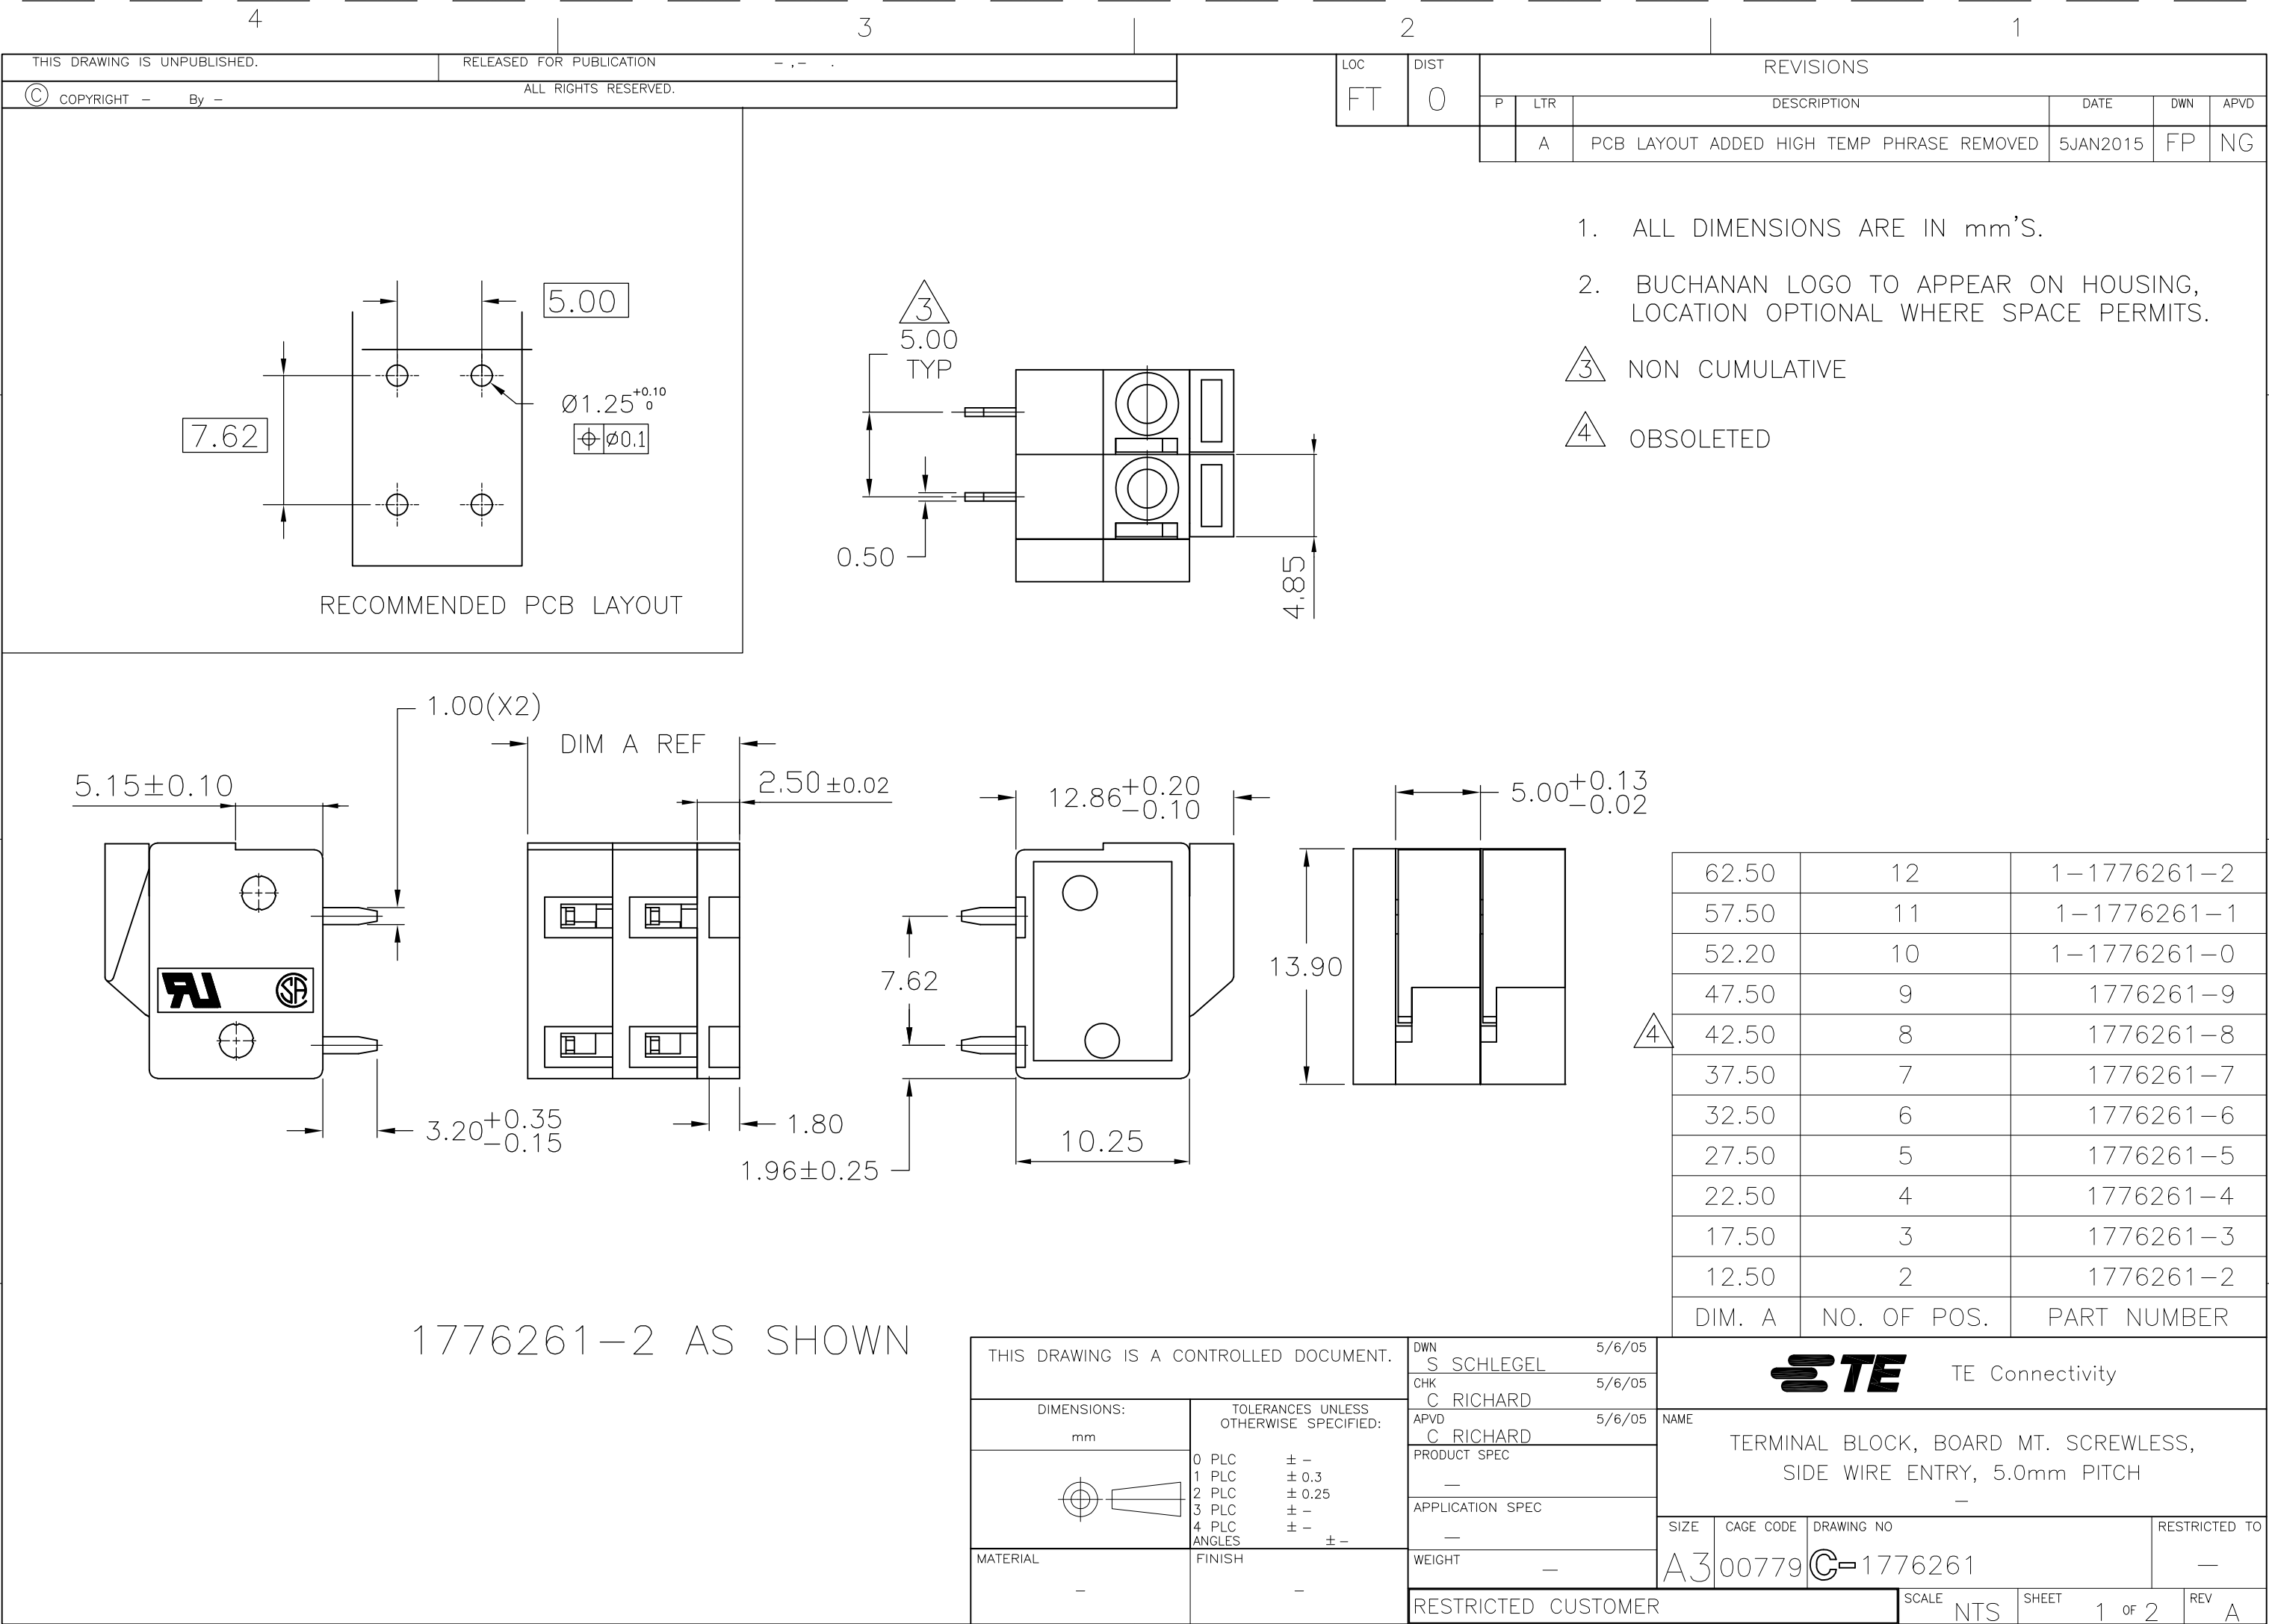

LOC FT	DIST 0	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

1. Application and Features:

- 1–1. This screwless terminals are suitable for both solid and flexible conductors.
- 1–2. A spring made of stainless strip steel guarantees for permanent and safe contact.
- 1–3. The type is operated by pushing a screwdriver on the level. This lever is fully integrated into the body.
- 1–4. It is equipped with a cover for easy hand adjustment.

2. Technical Data:

- 2–1. Material:

2–1–1. HOUSING: NYLON 6.6,
UL 94 V–0 (Green).

2–1–2. Contact: Brass(Cu Zn)
Ni,Tin plated.
first 50u” (min) Ni plated over all.
last 120u” (min) Tin plated over all.


2–1–3. Metal Plate: Stainless strip steel.

2–2. Electrical:

- 2–2–1. Current rating: 10 Amp 300VAC.
- 2–2–2. Dielectric withstanding
voltage: 2000VAC (min).
- 2–2–3. Insulation resistance: 500MΩ more
at 500VAC.
- 2–2–4. Wire Range: 14–22AWG.

2–3. Mechanical:

- 2–3–1. Wire retention force: 1.2 Kg (min).
- 2–3–2. Operating temperature: –55°C to +105°C.
- 2–3–3. Solderability: 95% coverage (min).

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 5/6/05	 TE Connectivity				
		CHK C RICHARD 5/6/05					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C RICHARD 5/6/05	NAME				
	0 PLC ± -	PRODUCT SPEC	TERMINAL BLOCK, BOARD MT. SCREWLESS, SIDE WIRE ENTRY, 5.0mm PITCH -				
	1 PLC ± 0.3	-					
	2 PLC ± 0.25	APPLICATION SPEC					
	3 PLC ± -	-					
4 PLC ± -	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL		-	A3	00779	C-1776261	-	
-	-	RESTRICTED CUSTOMER			SCALE	SHEET	REV
			NTS		2 OF 2	A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776261-6](#)