
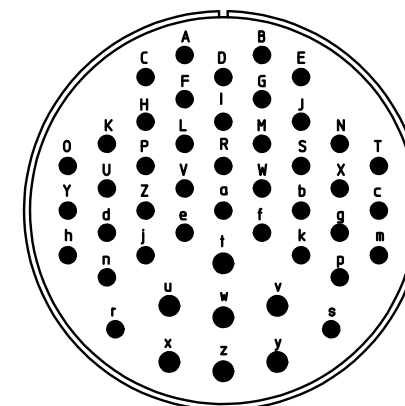
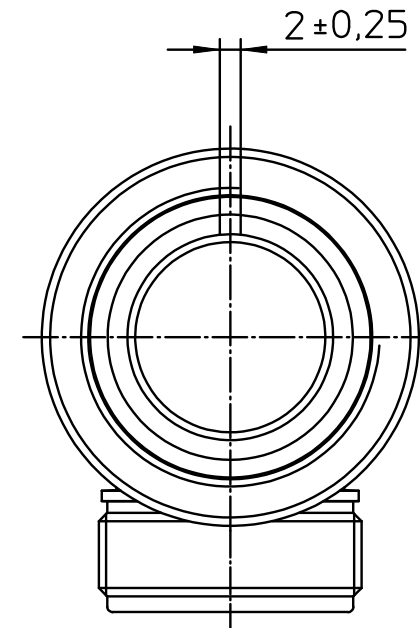


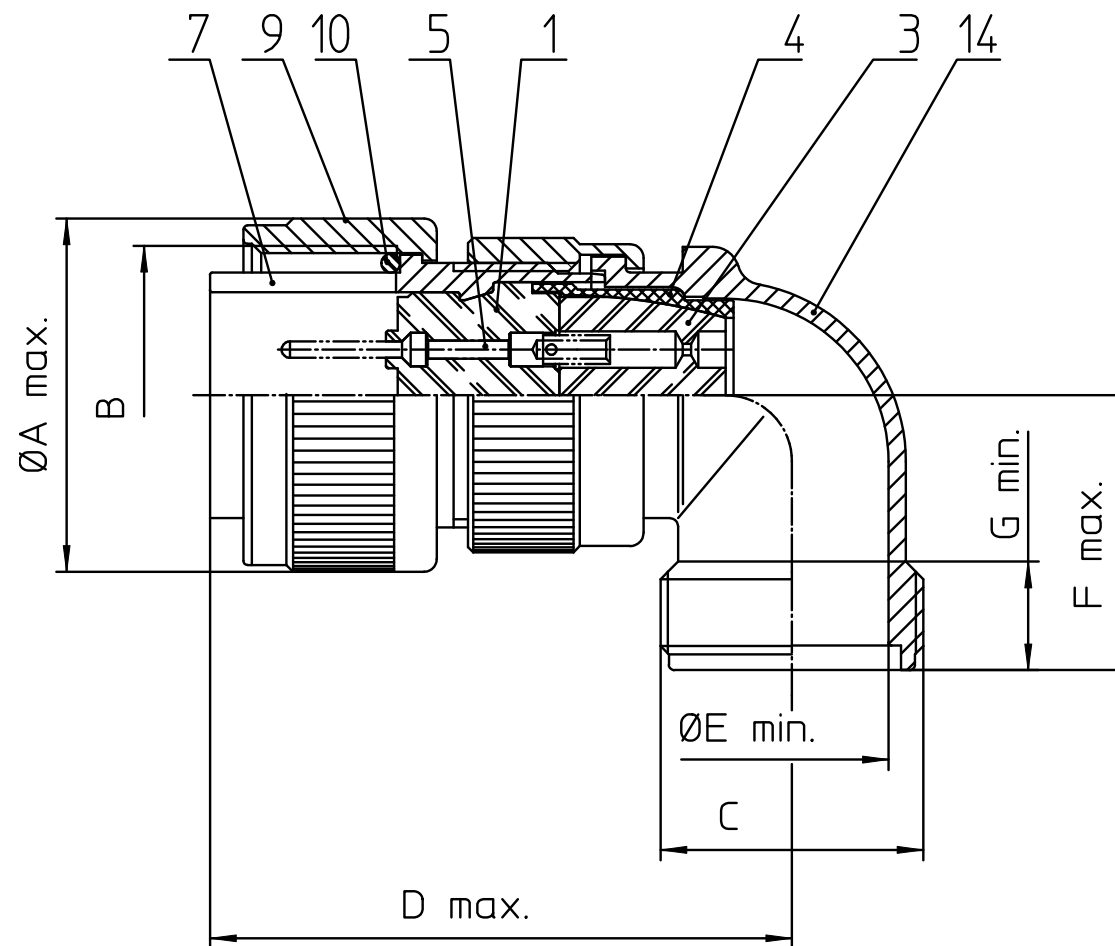

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 62.8              |
| B   | 2 1/4-16UN-2B     |
| C   | 2-18NS-2A         |
| D   | 58                |
| E   | 43.6              |
| F   | 46.0              |

| NO. | BESCHREIBUNG / DESCRIPTION           |
|-----|--------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN  |
| 3   | DICKTKÖRPER / GROMMET                |
| 4   | ENDRING / ENDRING                    |
| 5   | KONTAKTSTIFT/ CONTACT PIN            |
| 7   | ZYLINDERGHÄUSE / BARREL              |
| 9   | ÜBERWURFMUTTER / COUPLING NUT        |
| 10  | DICHTRING FRONT / FRONT SEALING RING |
| 12  | ENDGEHÄUSE / ENDBELL                 |

|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |

|                         |                                                  |
|-------------------------|--------------------------------------------------|
| Material Specification: |                                                  |
| Shell Material:         | Aluminium alloy                                  |
| Shell Plating:          | Olive drab chromate coating over cadmium plating |
| Insulator Material:     | Neoprene                                         |
| Contact Material:       | Copper alloy                                     |
| Contact Plating:        | Hard silver                                      |

|                                                                                                                                                                                                     |                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                   | drawing for<br>CUSTOMER                                                                                                                        |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71384 Weinstadt/Germany</small> | description<br><b>MS3108R36-7P</b><br><b>Plug 90°</b><br>Shortened light-weight endbell without cable clamp<br>Solder Cup / Pin / Layout: 36-7 |
| © All rights reserved. Reproduction or issue to third in any form<br>whatever is only permitted with written authorization of ITT Cannon                                                            | page<br>1/1<br>revision<br>857 24. Jan 19                                                                                                      |