



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		BA1	REVISED PER ECO-11-005150	28MAR2011	RK	HMR

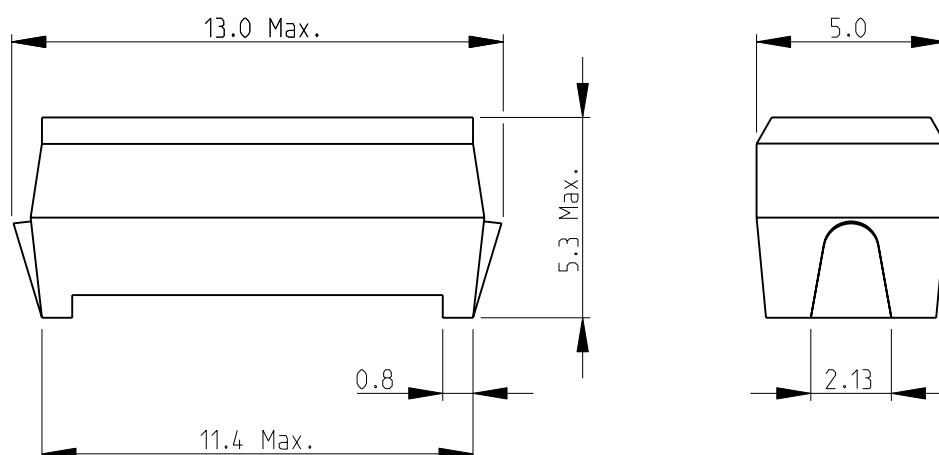


1 PACKAGING: SUPPLIED TAPED AND REELED ON 13" REELS IN QUANTITIES OF 1500 PIECES

2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3615 SERIES-HIGH CURRENT INDUCTOR SMD

RECOMMENDED LAND PATTERN

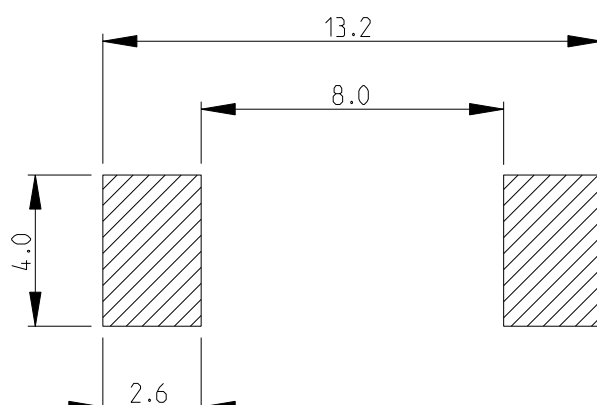

RoHS Compliant

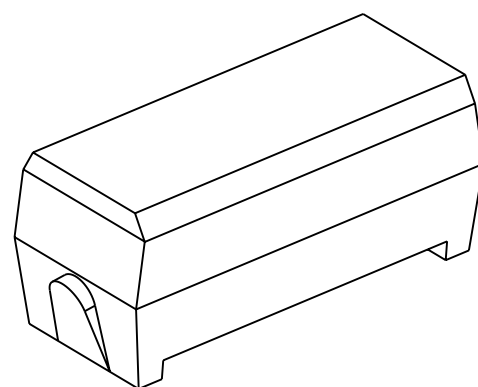

2008


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

BY -

© COPYRIGHT 2008

DIMENSIONS:		DWN	13-NOV-08	MATERIAL		FINISH					
mm		SUBHASH.M		-		-					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	13-NOV-08	TE Connectivity							
		PRAKASH.S									
		APVD	13-NOV-08								
		STEPHEN.P		NAME HIGH CURRENT INDUCTOR SMD SERIES 3615							
0 PLC		±0.2	PRODUCT SPEC								
1 PLC		±0.1	-								
2 PLC		±-	APPLICATION SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
3 PLC		±-	-		A 4		00779	©- 1624097	-		
4 PLC		±-									
ANGLES		±5°	WEIGHT	0.7g max.							
		CUSTOMER DRAWING									
						SCALE	5:1	SHEET	1 OF 1	REV	BA1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3615A470K](#)